

ASME B16.42-2011

[Revision of ASME B16.42-1998 (R2006)]

Ductile Iron Pipe Flanges and Flanged Fittings

Classes 150 and 300

ASMENORMDOC.COM : Click to view the full PDF of ASME B16.42 2011

AN AMERICAN NATIONAL STANDARD



**The American Society of
Mechanical Engineers**

ASMENORMDOC.COM : Click to view the full PDF of ASME B16.42 2011

INTENTIONALLY LEFT BLANK

.....

ASME B16.42 2017 Flanges and Flanged Fitting Classes 150 and 300

Three Park Avenue • New York, NY • 10016 USA

Date of Issuance: November 28, 2011

The next edition of this Standard is scheduled for publication in 2016.

ASME issues written replies to inquiries concerning interpretations of technical aspects of this Standard. Periodically certain actions of the ASME B16 Committee may be published as Cases. Cases and interpretations are published on the ASME Web site under the Committee Pages at <http://cstools.asme.org> as they are issued, and will be published within the next edition of the standard.

ASME is the registered trademark of The American Society of Mechanical Engineers.

This code or standard was developed under procedures accredited as meeting the criteria for American National Standards. The Standards Committee that approved the code or standard was balanced to assure that individuals from competent and concerned interests have had an opportunity to participate. The proposed code or standard was made available for public review and comment that provides an opportunity for additional public input from industry, academia, regulatory agencies, and the public-at-large.

ASME does not “approve,” “rate,” or “endorse” any item, construction, proprietary device, or activity.

ASME does not take any position with respect to the validity of any patent rights asserted in connection with any items mentioned in this document, and does not undertake to insure anyone utilizing a standard against liability for infringement of any applicable letters patent, nor assumes any such liability. Users of a code or standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, is entirely their own responsibility.

Participation by federal agency representative(s) or person(s) affiliated with industry is not to be interpreted as government or industry endorsement of this code or standard.

ASME accepts responsibility for only those interpretations of this document issued in accordance with the established ASME procedures and policies, which precludes the issuance of interpretations by individuals.

No part of this document may be reproduced in any form,
in an electronic retrieval system or otherwise,
without the prior written permission of the publisher.

The American Society of Mechanical Engineers
Three Park Avenue, New York, NY 10016-5990

Copyright © 2011 by
THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS
All rights reserved
Printed in U.S.A.

CONTENTS

Foreword	iv
Committee Roster	v
Correspondence With the B16 Committee	vi
Summary of Changes	vii
1 Scope	1
2 General	1
3 Pressure–Temperature Ratings	1
4 Size	2
5 Marking	2
6 Materials	3
7 Dimensions	3
8 Tolerances	5
9 Testing	5
Figures	
1 Method of Designating Outlets of Reducing Fittings	6
2 Method of Designating Location of Tapped Holes for Drains When Specified	7
Tables	
1 Pressure–Temperature Ratings	8
2 Reducing Threaded Flanges for Classes 150 and 300	9
3 Dimensions of Class 150 Elbows, Double Branch Elbows, Tees, Crosses, Laterals, True Ys (Straight Sizes), and Reducers	10
4 Dimensions of Class 300 Elbows, Tees, Crosses, Laterals, True Ys (Straight Sizes), and Reducers	12
5 Dimensions of Class 150 Base Elbows and Base Tees	14
6 Dimensions of Class 300 Base Elbows and Base Tees	15
7 Dimensions of Class 150 Ductile Iron Flanges	16
8 Templates for Drilling Class 150 Ductile Iron Flanges	17
9 Dimensions of Class 300 Ductile Iron Flanges	18
10 Templates for Drilling Class 300 Ductile Iron Flanges	20
Mandatory Appendices	
I Pressure–Temperature Ratings — Dimensions and Templates of Pipe Flanges and Flanged Fittings in U.S. Customary Units	21
II References	35
Nonmandatory Appendices	
A Quality System Program	36
B Methods for Establishing Pressure–Temperature Ratings	37

FOREWORD

In 1921, the American Engineering Standards Committee, later the American Standards Association (ASA), now the American National Standards Institute (ANSI), authorized the organization of a Sectional Committee on the Standardization of Pipe Flanges and Flanged Fittings, with the following organizations as joint sponsors: Heating, Piping, and Air Conditioning Contractors National Association (later the Mechanical Contractors Association of America, MCAA), Manufacturers Standardization Society of the Valves and Fittings Industry (MSS), and The American Society of Mechanical Engineers (ASME). Cast iron flanges and flanged fittings are within the scope of Subcommittee No. 1 (now Subcommittee A), with standards approved by ASA as early as 1928.

In 1957, piping components of ductile iron (also called nodular iron and, in Europe, spheroidal graphite iron) first appeared on the market. Controversy immediately developed over proper pressure-temperature ratings, and this was further aggravated by the use of casting patterns for both gray iron and carbon steel for producing the components.

Conflicting philosophies, which emerged from that controversy, thwarted efforts by MSS to develop standard practices in the early 1960s; the conflicts persisted during a study of ratings, starting in 1966 by American National Standards Committee B16 (as the Sectional Committee was called after reorganization of ASA as ANSI). The conflict continued to delay acceptance and approval of this Standard, which ultimately originated with a draft developed by MSS (taking advantage of earlier efforts) and submitted to Subcommittee A in 1977. Combining that draft with the rating basis developed in the B16 Committee, the first edition of this Standard was found acceptable and was approved by the Standards Committee, cosecretariat organizations, and ANSI, and was published with the designation ANSI B16.42-1979.

In 1982, American National Standards Committee B16 was reorganized as an ASME Committee operating under procedures accredited by ANSI. The 1987 edition of the Standard updated the referenced standards and specifications, and established U.S. Customary units as the standard. Following approval by the Standards Committee and ASME, ANSI granted its approval as an American National Standard on July 13, 1987, with the new designation ASME/ANSI B16.42-1987.

In the 1998 edition of ASME B16.42, reference standards were updated, a quality system program annex was added, and several editorial revisions were made. Following approval by ASME B16 Subcommittee B and the B16 Standards Committee, ANSI approved the American National Standard on November 20, 1998.

Metric units were provided as an independent but parallel alternative standard to the U.S. Customary units in the 2011 edition. Following approval by the Standards Committee and the ASME Board on PTCS, this revision to the 1998 edition of this Standard was approved as an American National Standard by ANSI on August 9, 2011 with the new designation ASME B16.42-2011.

Requests for interpretation or suggestions for revision should be sent to the Secretary, B16 Committee, The American Society of Mechanical Engineers, Three Park Avenue, New York, NY 10016-5990.

ASME B16 COMMITTEE

Standardization of Valves, Flanges, Fittings, and Gaskets

(The following is the roster of the Committee at the time of approval of this Standard.)

STANDARDS COMMITTEE OFFICERS

W. B. Bedesem, *Chair*
G. A. Jolly, *Vice Chair*
D. R. Sharp, *Secretary*

STANDARDS COMMITTEE PERSONNEL

A. Appleton , Alloy Stainless Products Co., Inc.	G. A. Jolly , Vogt Valves/Flowserve Corp.
R. W. Barnes , Anric Enterprises, Inc.	M. Katcher , Haynes International
W. B. Bedesem , Consultant	W. N. McLean , B&L Engineering
R. M. Bojarczuk , ExxonMobil Research and Engineering Co.	T. A. McMahon , Emerson Process Management
D. F. Buccicone , Elkhart Products Corp.	M. L. Nayyar , Bechtel Power Corp.
A. M. Cheta , Royal Dutch Shell	W. H. Patrick , The Dow Chemical Co.
M. A. Clark , Nibco, Inc.	R. A. Schmidt , Canadoil
G. A. Cuccio , Capitol Manufacturing Co.	D. R. Sharp , The American Society of Mechanical Engineers
C. E. Davila , Crane Energy	H. R. Sonderegger , Fluoroseal, Inc.
D. R. Frikken , Becht Engineering Co.	W. M. Stephan , Flexitallic, L.P.
R. P. Griffiths , U.S. Coast Guard	F. R. Volgstadt , Volgstadt and Associates, Inc.
	D. A. Williams , Southern Company Generation

SUBCOMMITTEE B — THREADED FITTINGS (EXCEPT STEEL), FLANGES, AND FLANGED FITTINGS

K. Barron , <i>Vice Chair</i> , Ward Manufacturing	A. A. Knapp , A. Knapp and Associates
C. E. O'Brien , <i>Secretary</i> , The American Society of Mechanical Engineers	W. H. Levan , Cast Iron Soil Pipe Institute
W. Bliss , Tyler Pipe Co.	P. I. McGrath, Jr. , <i>Contributing Member</i> , Consultant
R. W. Bonds , Ductile Iron Pipe Research Association	W. N. McLean , B&L Engineering
M. A. Clark , Nibco, Inc.	J. K. Schultz , Conine Manufacturing Co., Inc.
J. R. Holstrom , Val-Matic Valve and Manufacturing Corp.	G. L. Simmons , Charlotte Pipe and Foundry
	G. T. Walden , Frischkorn, Inc.

CORRESPONDENCE WITH THE B16 COMMITTEE

General. ASME Standards are developed and maintained with the intent to represent the consensus of concerned interests. As such, users of this Standard may interact with the Committee by requesting interpretations, proposing revisions, and attending Committee meetings. Correspondence should be addressed to:

Secretary, B16 Standards Committee
The American Society of Mechanical Engineers
Three Park Avenue
New York, NY 10016-5990

As an alternative, inquiries may be submitted via email to: SecretaryB16@asme.org.

Proposing Revisions. Revisions are made periodically to the Standard to incorporate changes that appear necessary or desirable, as demonstrated by the experience gained from the application of the Standard. Approved revisions will be published periodically.

The Committee welcomes proposals for revisions to this Standard. Such proposals should be as specific as possible, citing the paragraph number(s), the proposed wording, and a detailed description of the reasons for the proposal, including any pertinent documentation.

Proposing a Case. Cases may be issued for the purpose of providing alternative rules when justified, to permit early implementation of an approved revision when the need is urgent, or to provide rules not covered by existing provisions. Cases are effective immediately upon ASME approval and shall be posted on the ASME Committee Web page.

Requests for Cases shall provide a Statement of Need and Background Information. The request should identify the Standard, the paragraph, figure or table number(s), and be written as a Question and Reply in the same format as existing Cases. Requests for Cases should also indicate the applicable edition(s) of the Standard to which the proposed Case applies.

Interpretations. Upon request, the B16 Committee will render an interpretation of any requirement of the Standard. Interpretations can only be rendered in response to a written request sent to the Secretary of the B16 Standards Committee.

The request for interpretation should be clear and unambiguous. It is further recommended that the inquirer submit his/her request in the following format:

Subject: Cite the applicable paragraph number(s) and the topic of the inquiry.
Edition: Cite the applicable edition of the Standard for which the interpretation is being requested.
Question: Phrase the question as a request for an interpretation of a specific requirement suitable for general understanding and use, not as a request for an approval of a proprietary design or situation. The inquirer may also include any plans or drawings that are necessary to explain the question; however, they should not contain proprietary names or information.

Requests that are not in this format will be rewritten in this format by the Committee prior to being answered, which may inadvertently change the intent of the original request.

ASME procedures provide for reconsideration of any interpretation when or if additional information that might affect an interpretation is available. Further, persons aggrieved by an interpretation may appeal to the cognizant ASME Committee or Subcommittee. ASME does not "approve," "certify," "rate," or "endorse" any item, construction, proprietary device, or activity.

Attending Committee Meetings. The B16 Standards Committee regularly holds meetings, which are open to the public. Persons wishing to attend any meeting should contact the Secretary of the B16 Standards Committee.

ASME B16.42-2011

SUMMARY OF CHANGES

Following approval by the ASME B16 Committee and ASME, and after public review, ASME B16.42-2011 was approved by the American National Standards Institute on August 9, 2011.

ASME B16.42-2011 includes the following changes identified by a margin note, (11). In addition, in the main text, the "General" section was moved to section 2, and the subsequent sections and their paragraphs were renumbered accordingly. Metric (SI) values were added throughout the main text and tables.

<i>Page</i>	<i>Location</i>	<i>Change</i>
1	1	Subparagraph (b) revised
	2	(1) Former para. 1.3.2 deleted (2) Paragraphs 2.3 through 2.6 added
2–4	3.2	Second paragraph revised
	3.3	Revised
	3.5	First paragraph revised
	4.1	Revised
	5	Subparagraph (f) revised
	6.2	First paragraph revised
	7	Footnote 1 deleted
	7.2.1	Revised
	7.4	Revised
	7.6.3	Revised
	7.7.2	Revised
	7.8	Revised
5	9.3	Subparagraph (a) revised
9	Table 2	Note (3) revised
10, 11	Table 3	(1) Former Table 5 redesignated as Table 3 (2) Last column head revised
		(1) Former Table 9 redesignated as Table 4 (2) Last column head revised
12, 13	Table 4	Former Table 6 redesignated as Table 5
14	Table 5	Former Table 10 redesignated as Table 6
15	Table 6	(1) Former Table 4 redesignated as Table 7 (2) Seventh column head revised
16	Table 7	(1) Former Table 3 redesignated as Table 8
17	Table 8	

<i>Page</i>	<i>Location</i>	<i>Change</i>
		(2) Note (2) revised
18, 19	Table 9	(1) Former Table 8 redesignated as Table 9 (2) Eighth column head revised
20	Table 10	(1) Former Table 7 redesignated as Table 10 (2) In seventh column head, Note reference revised
21–34	Mandatory Appendix I	Added
35	Mandatory Appendix II	Former Annex B redesignated as Mandatory Appendix II and revised in its entirety
36	Nonmandatory Appendix A	Former Annex C redesignated as Nonmandatory Appendix A
37	Nonmandatory Appendix B	Former Annex A redesignated as Nonmandatory Appendix B

ASME B16.42 2011

Click to view the full PDF of ASME B16.42 2011

DUCTILE IRON PIPE FLANGES AND FLANGED FITTINGS

Classes 150 and 300

(11) 1 SCOPE

This Standard covers minimum requirements for Classes 150 and 300 cast ductile iron pipe flanges and flanged fittings. The requirements covered are as follows:

- (a) pressure-temperature ratings
- (b) sizes and method of designating openings of reducing fittings
- (c) marking
- (d) material
- (e) dimensions and tolerances
- (f) bolts, nuts, and gaskets
- (g) tests

(11) 2 GENERAL

2.1 References

Standards and specifications adopted by reference in this Standard are shown in Mandatory Appendix II, which is part of this Standard. It is not considered practical to identify the specific edition of each standard and specification in the individual references. Instead, the specific edition reference is identified in the Appendix.

2.2 Quality Systems

Requirements relating to the product manufacturers' quality system programs are described in Nonmandatory Appendix A.

2.3 Relevant Units

This Standard states values in both SI (Metric) and U.S. Customary units. As an exception, diameters of bolts and flange bolt holes are only expressed in inch units. These systems of units are to be regarded separately as standard. Within the text, the U.S. Customary units are shown in parentheses or in separate tables that appear in Mandatory Appendix I. The values stated in each system are not exact equivalents; therefore, it is required that each system of units be used independently of the other. Except for the diameters of bolts and flange bolt holes, combining values from the two systems constitutes nonconformance with the Standard.

2.4 Service

Criteria for selection of materials suitable for particular fluid service are not within the scope of this Standard.

2.5 Convention

For determining conformance with this Standard, the convention for fixing significant digits where limits (maximum and minimum values) are specified shall be as defined in ASTM E29. This requires that an observed or calculated value be rounded off to the nearest unit in the last right-hand digit used for expressing the limit. Decimal values and tolerances do not imply a particular method of measurement.

2.6 Denotation

2.6.1 Pressure Rating Designation. Class, followed by a dimensionless number, is the designation for pressure-temperature ratings, as follows:

- (a) Class 150
- (b) Class 300

2.6.2 Size. NPS, followed by a dimensionless number, is the designation for nominal flange or flanged fitting size. NPS is related to the referenced nominal diameter, DN, used in metric units. The relationship is typically as follows:

NPS	DN
1	25
1 $\frac{1}{4}$	32
1 $\frac{1}{2}$	40
2	50
2 $\frac{1}{2}$	65
3	80
3 $\frac{1}{2}$	90
4	100

For $NPS \geq 4$, the related $DN = 25 \times NPS$.

3 PRESSURE-TEMPERATURE RATINGS

3.1 General

Cast ductile iron pipe flanges and flanged fittings covered by this Standard shall be designated as one of the following: Class 150 or Class 300.

Except as provided in para. 3.5, ratings are maximum allowable working pressures, expressed as gage pressure, at the service temperature from -29°C (-20°F) to 343°C (650°F). Ratings in Table 1 are in Metric units. For intermediate temperatures, linear interpolation is permitted. Methods for establishing pressure-temperature ratings are given in Mandatory Appendix I.

(11) 3.2 Ratings of Flanged Joints

Ratings in this Standard apply to flanged joints that conform to the limitations on bolting in para. 6.2 and on gaskets in para. 7.8, and which are made up in accordance with good practice for alignment and assembly. See also para. 3.4.

Use of the ratings for flanged joints not conforming to these limitations is the sole responsibility of the user. A flanged joint is composed of separate and independent, although interrelated, components: the flanges, the gasket, and the bolting, which are assembled by another influence, the assembler. Proper controls must be exercised in the selection and application for all these elements to attain a joint that has acceptable leak tightness. Special techniques, such as controlled bolt tightening, are described in ASME PCC-1.

If the two flanges in a flanged joint do not have the same pressure-temperature ratings, the rating of the joint at any temperature is the lower of the two flange ratings at that temperature.

(11) 3.3 Rating Temperature

Temperatures shown for corresponding pressure rating shall be the material temperature of the pressure-retaining structure. It may be assumed that the material temperature is the same as the fluid temperature. Use of a pressure rating at a material temperature other than that of the contained fluid is the responsibility of the user and subject to the requirements of any applicable code or regulation.

3.4 Temperature Considerations

Application of the ratings in this Standard to flanged joints at both high and low temperatures shall take into consideration the risk of leakage due to forces and moments developed in the connected piping or equipment. The provisions in paras. 3.4.1 and 3.4.2 are intended to minimize these risks.

3.4.1 Flange Attachment. Threaded flanges are not recommended for service above 260°C (500°F) if severe thermal gradients or thermal cycling is involved.

3.4.2 High-Temperature Service. When used above 205°C (400°F), Class 150 flanged joints may develop leakage unless care is taken to avoid imposing severe external loads and/or severe thermal gradients.

(11) 3.5 Variances From Ratings

Except as provided herein, ratings are the maximum allowable working pressure for the corresponding temperature.

3.5.1 Safety or Relief Valve Operation. Under conditions of safety valve, relief valve, or rupture disk operation, the pressure on a flange or flanged fitting may

exceed the rated pressure at the pressure-relieving temperature by no more than 10%. Such conditions are necessarily of short duration. Overpressure greater than the aforementioned under pressure-relieving conditions is the responsibility of the user, subject to the requirements of the applicable code or regulation.

3.5.2 Other Variances. Operating variations (transients) that subject a flange or flanged fitting to pressure in excess of the rated pressure at the corresponding temperature are the responsibility of the user, subject to the requirements of the applicable code or regulation.

3.5.3 System Hydrostatic Test. Flanged joints and flanged fittings may be subjected to system hydrostatic tests at a pressure not to exceed the hydrostatic shell test pressure specified in para. 9.3. Testing at any higher pressure is the responsibility of the user.

4 SIZE**4.1 Nominal Size****(11)**

As applied in this Standard, the use of the phrase “nominal pipe size” or the designation NPS followed by a dimensionless number is for identifying the end connection of piping, flanges, or flanged fittings. The number is not necessarily the same as the inside diameter of the flange or flanged fitting. The diameter of a bolt is its nominal size. Use of nominal indicates that the stated size or dimension is only for designation, not measurement.

4.2 Reducing Fitting Sizes

Reducing fittings shall be designated by the size of the openings in their proper sequence as indicated in the sketches. See Fig. 1.

4.3 Reducing Flange Sizes

Reducing flanges shall be designated by the two nominal pipe sizes. See examples in Note (4) of Table 2.

5 MARKING**(11)**

Except as modified herein, flanges and flanged fittings shall be marked as required in MSS SP-25.

(a) *Name.* The manufacturer’s name or trademark shall be applied.

(b) *Material.* The word “DUCTILE” or “DI” where space does not permit “DUCTILE.”

(c) *Rating Class.* Numerals shall be applied giving the pressure rating class for which the product is designed.

(d) *Designation.* The designation “B16” shall be applied, preferably located adjacent to the Class designation, to indicate conformance to this Standard.

(e) *Temperature.* No temperature markings are required on flanges and flanged fittings, but if marked,

the temperature shall be shown with its corresponding tabulated pressure rating.

(f) *Size.* The nominal pipe size shall be applied, but may be omitted from reducing flanges and reducing flanged fittings.

6 MATERIALS

6.1 Castings

Ductile iron castings covered by this Standard shall conform to ASTM A395. The castings shall not be repaired by plugging, welding, brazing, or impregnation.

(11) 6.2 Bolting

Bolting listed in paras. 6.2.1 and 6.2.2 is recommended to be used in flanged joints covered by this Standard. Bolting of other material may be used if permitted by the applicable code or governmental regulation.

6.2.1 High-Strength Bolting. Bolting materials having allowable stresses not less than those for ASTM A193 Grade B7 may be used with any flanged joint at all listed temperatures. The strength of the nut shall be not less than that specified for ASTM A194 Grade 2H.

6.2.2 Low-Strength Bolting. Bolting materials with yield strength equivalent to ASTM A307 Grade B are considered low strength, and may be used for flanged joints at temperatures not greater than 205°C (400°F) and only with gaskets described in para. 7.8.

6.2.3 Bolting to Cast Iron Flanges. When Class 150 ductile iron flanges are bolted to Class 125 cast iron flanges, or Class 300 ductile iron flanges are bolted to Class 250 cast iron flanges, it is recommended that low-strength boltings be used within the limitations in para. 6.2.2. If high-strength bolting is used, it is recommended that the mating flanges be flat faced and that full-faced gaskets (ASME B16.5, Table B-1, Gasket Group Number 1a) extending to the O.D. of the flange be used.

6.3 Gaskets

Materials listed in Table B-1 of ASME B16.5 shall be used. The user is responsible for selection of gasket materials that will withstand the expected bolt load without injurious crushing and that are suitable for the service conditions.

For low-strength bolting described in para. 6.2.2, only gaskets listed in Group 1a (ASME B16.5, Table B-1) shall be used.

(11) 7 DIMENSIONS

7.1 Center to Contact Surface and Center to End

7.1.1 Standard Fittings. Center-to-contact-surface dimensions are shown in Tables 3 and 4.

7.1.2 Reducing Fittings. Center-to-contact-surface or center-to-flange-edge dimensions for all openings shall be the same as those of straight size fittings of the largest opening. The contact-surface-to-contact-surface dimensions for all combinations of reducers and eccentric reducers shall be as listed for the larger opening.

7.1.3 Side-Outlet Fittings. Side-outlet elbows, side-outlet tees, and side-outlet crosses shall have all openings on intersecting centerlines, and the center-to-contact-surface dimensions of the side outlet shall be the same as for the largest opening. Long radius elbows with side outlet shall have the side outlet on the radial centerline of the elbow, and the center-to-contact-surface dimension of the side outlet shall be the same as for the regular 90 deg elbow of the largest opening.

7.1.4 Fittings With Bases. Dimensions of bases for base elbows and base tees are shown in Tables 5 and 6.

7.1.5 Special-Degree Elbows. Special-degree elbows ranging from 1 deg to 45 deg, inclusive, shall have the same center-to-contact-surface dimensions as 45 deg elbows; those over 45 deg to 90 deg, inclusive, shall have the same center-to-contact-surface dimensions as 90 deg elbows. The angle designation of an elbow is its deflection from straight-line flow and is also the angle between the flange faces.

7.2 Facings

7.2.1 General. Class 150 fittings and companion flanges are regularly furnished flat or with a 1.5 mm (0.06 in.) raised face. Class 300 fittings and companion flanges are furnished with a 1.5 mm (0.06 in.) raised face. The raised face is included in the minimum flange thickness dimensions, Q , as given in the tables. (11)

7.2.2 Facings of Blind Flanges. Blind flanges need not be faced in the center if, when this center part is raised, its diameter is at least 25.4 mm (1 in.) smaller than the inside diameter of the corresponding pressure class fittings, as given in the tables. When the center part is depressed, its diameter shall not be greater than the inside diameter of the corresponding pressure-class fittings, as given in the tables. Machining of the depressed center is not required.

7.2.3 Flange Facing Finish. Contact faces shall be finished in accordance with MSS SP-6.

7.3 Flange Bolt Holes

Bolt holes are in multiples of four so that fittings may face in any quadrant. Pairs of bolt holes shall straddle the centerlines.

7.4 Spot Facing

Spot facing is required on ductile iron flanges and flanges on fittings if the flange thickness at any point does not meet the required minimum thickness, Q , as

given in Tables 3, 4, 7, and 9 by more than the following amounts:

NPS	Maximum Excess Thickness, mm (in.)
2–18	3 (0.12)
20–24	4.8 (0.19)

Flanges and flanged fittings shall have bearing surfaces for bolting that are parallel to the flange face within 1 deg. Any back facing or spot facing shall not reduce the flange thickness below the minimum. Spot facing or back facing shall be in accordance with MSS SP-9.

7.5 Reducing Flanges

7.5.1 Drilling, Outside Diameter, Thickness, and Facing Dimensions. Flange drilling, outside diameter, thickness, and facing are the same as those of the standard flange of the size from which the reduction is being made.

7.5.2 Threaded Flanges. The hub dimensions shall be at least as large as those of the standard flange of the size from which the reduction is being made. The hub may be larger or may be omitted, as detailed in Table 2.

7.6 Threads for Threaded Flanges

Threaded flanges shall have American National Standard pipe threads, general purpose (inch), conforming to ANSI/ASME B1.20.1. The thread shall be concentric with the axis of the flange, and variations in alignment shall not exceed 5 mm/m (0.06 in./ft) (0.5%).

7.6.1 Class 150 Flanges. Class 150 flanges are made without a counterbore. The threads shall be chamfered approximately to the major diameter of the thread at the back of the flange at an angle of approximately 45 deg with the axis of the thread, to afford easy entrance in making a joint and to protect the thread. The chamfer shall be concentric with the thread and shall be included in the measurement of the thread length.

7.6.2 Class 300 Flanges. Class 300 flanges may be made with a counterbore. The threads shall be chamfered to the diameter of the counterbore at the back of the flange at an angle of approximately 45 deg with the axis of the threads to afford easy entrance in making a joint. The counterbore and chamfer shall be concentric with the thread.

(11) **7.6.3 Length of Threads.** The minimum length of effective thread in reducing flanges shall be at least equal to dimension “Length of Thread” of the corresponding pressure class threaded flange as shown in the tables, but does not necessarily extend to the face of the flange. See Table 2 for reducing threaded flanges.

7.6.4 Threading Tolerances. The gaging notch of the working gage shall come flush with the bottom of

the chamfer in all threaded flanges, and shall be considered as the intersection of the chamfer cone and the pitch cone of the thread. This depth of chamfer is approximately equal to one-half the pitch of the thread. The maximum allowable thread variation is one turn large or small from the gaging notch.

7.7 Stud Bolts, Bolts, and Nuts

7.7.1 Alloy Bolting. Alloy steel stud bolts, threaded at both ends or full length, or heavy hex bolts may be used. Heavy hex nuts shall be used with all alloy steel bolting.

7.7.2 Carbon Steel Bolting

(a) Bolts smaller than $\frac{3}{4}$ diameter shall have square heads or heavy hex heads. Nuts shall be heavy hex.

(b) Bolts $\frac{3}{4}$ diameter and larger shall have square heads or hex heads. Nuts shall be hex or heavy hex.

7.7.3 Bolt Dimensions. Dimensions of all bolts shall conform to ASME B18.2.1.

7.7.4 Nut Dimensions. Dimensions of all nuts shall conform to ASME B18.2.2.

7.7.5 Threading of Bolts

(a) Carbon steel bolting shall be threaded in accordance with ASME B1.1, coarse thread series, Class 2A for bolts and stud bolts, and Class 2B for nuts.

(b) Alloy steel bolting shall be threaded in accordance with ASME B1.1. Nominal diameters 1 in. and smaller shall be of the coarse thread series; nominal diameters $1\frac{1}{8}$ in. and larger shall be of the 8-thread series. Bolts, studs, and stud bolts shall have Class 2A dimensions; nuts shall have Class 2B dimensions.

7.8 Gaskets

Gaskets for Class 150 flat face flanges shall conform to the dimensions shown in ASME B16.21. For flanges with raised face, gaskets shall conform to ASME B16.5, Nonmandatory Appendix B, Limiting Dimensions of Gaskets Other Than Ring Joint Gaskets, Group Ia.

7.9 Drains

7.9.1 Pipe Thread Tapping. Holes may be tapped in the wall of a fitting if the metal is thick enough to allow the effective thread length specified in MSS SP-45. Where thread length is insufficient or the tapped hole needs reinforcement, a boss shall be added.

7.9.2 Bosses. Where bosses are required, the diameters shall be as specified in MSS SP-45.

7.9.3 Designating Locations. The means of designating the locations of tapped holes or sockets for drains in fittings is shown in Fig. 2.

Each possible location is designated by a letter so that the desired locations for the various types of fittings may be specified without using further sketches or descriptions.

8 TOLERANCES

8.1 Wall Thickness

The wall thickness values for fittings listed in Tables 3 and 4 are minimums. Equipment shall be designed to produce greater nominal wall thickness so that manufacturing variances will not fall below these minimum values. See para. B-1.2 in Nonmandatory Appendix B for the basis used to establish these values.

8.2 Center to Contact Surface and Contact Surface to Contact Surface

8.2.1 Center to Contact Surface

- (a) Sizes NPS 10 and smaller: ± 0.8 mm (± 0.03 in.)
- (b) Sizes NPS 12 and larger: ± 1.5 mm (± 0.06 in.)

8.2.2 Contact Surface to Contact Surface

- (a) Sizes NPS 10 and smaller: ± 1.5 mm (± 0.06 in.)
- (b) Sizes NPS 12 and larger: ± 3 mm (± 0.12 in.)

8.3 Facings

Outside diameter, 1.5 mm (0.06 in.) raised face: ± 0.8 mm (± 0.03 in.)

8.4 Flange Thickness

- (a) Sizes NPS 18 and smaller: $+3$ mm, -0 ($+0.12$ in., -0)
- (b) Sizes NPS 20 and larger: $+4.8$ mm, -0 ($+0.19$ in., -0)

8.5 Bore of Flanges

8.5.1 Lapped Flanges

- (a) Sizes NPS 10 and smaller: $+0.8$ mm, -0 ($+0.03$ in., -0)
- (b) Sizes NPS 12 and larger: $+1.5$ mm, -0 ($+0.06$ in., -0)

8.5.2 Counterbore of Threaded Flanges

- (a) Sizes NPS 10 and smaller: $+0.8$ mm, -0 ($+0.03$ in., -0)
- (b) Sizes NPS 12 and larger: $+1.5$ mm, -0 ($+0.06$ in., -0)

8.6 Drilling and Facing

- (a) Bolt circle diameter: ± 1.5 mm (± 0.06 in.)
- (b) Center to center of adjacent bolt holes: ± 0.8 mm (± 0.03 in.)
- (c) Eccentricity between bolt circle diameter and machined facing diameters:
 - (1) Sizes NPS 2½ and smaller: ± 0.8 mm (± 0.03 in.)
 - (2) Sizes NPS 3 and larger: ± 1.5 mm (± 0.06 in.)

9 TESTING

9.1 General

Flanged fittings shall be hydrostatically tested in accordance with para. 9.3.

9.2 Flange Testing

Flanges are not required to be hydrostatically tested. Flanges attached to (or integral with) piping, pressure vessels, or other equipment may be subject to system hydrostatic test (see para. 3.5.3). In such cases, attention should be given to gasket selection because of possible excessive deformation of the flange.

9.3 Fitting Shell Tests

(11)

The hydrostatic shell test for flanged fittings shall be not less than 1.5 times the 38°C (100°F) rating rounded off to the next higher 1.7 bar (25 psi) increment. The test pressure shall be 27.6 bar (400 psi) for Class 150 and 67.2 bar (975 psi) for Class 300.

- (a) The test shall be made with water or with other suitable fluid provided its viscosity is no greater than that of water, at a test fluid temperature not above 52°C (125°F).
- (b) The test duration shall be a minimum of 15 s for fittings NPS 2 and smaller, 60 s for fittings NPS 2½ through 8, and 3 min for fittings NPS 10 and larger.
- (c) No visible leakage is permitted through the pressure boundary wall.

Fig. 1 Method of Designating Outlets of Reducing Fittings

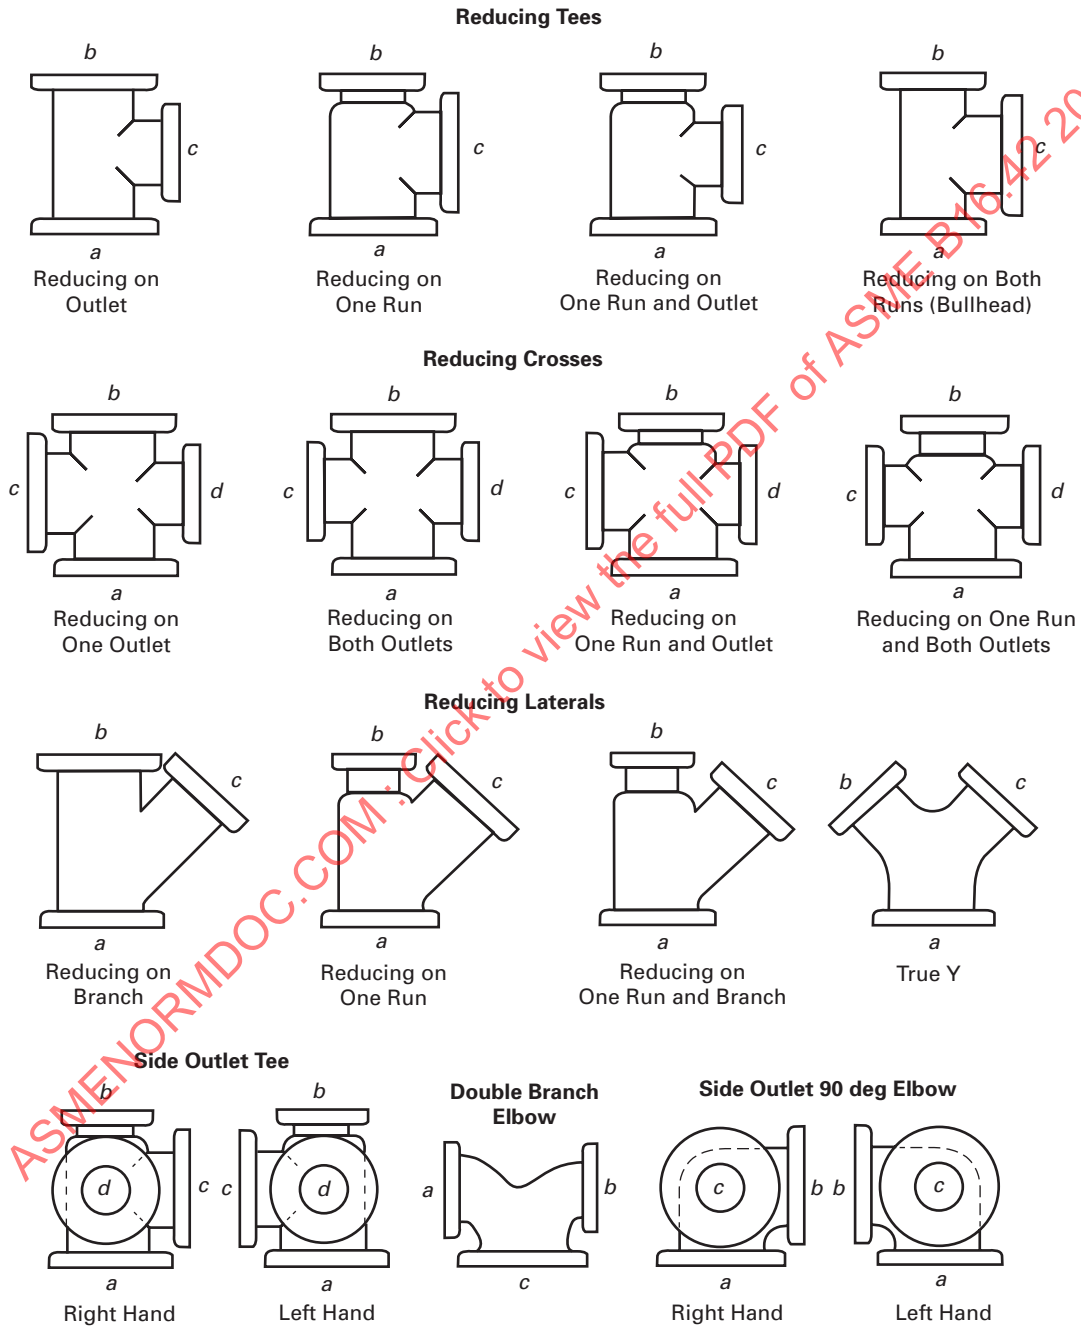


Fig. 2 Method of Designating Location of Tapped Holes for Drains When Specified

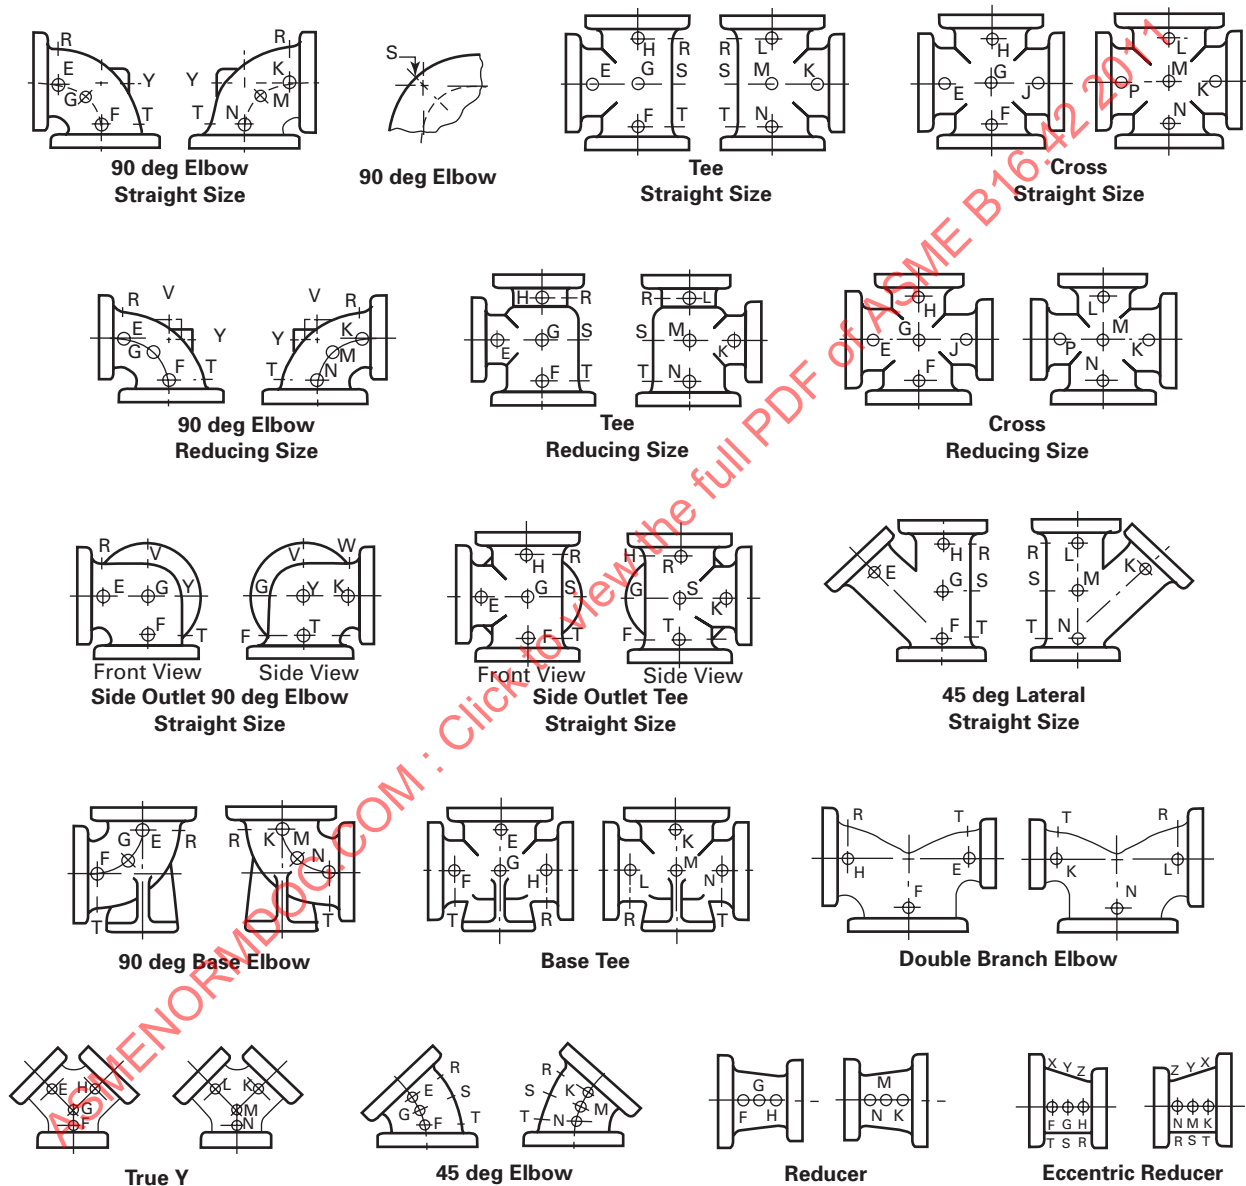
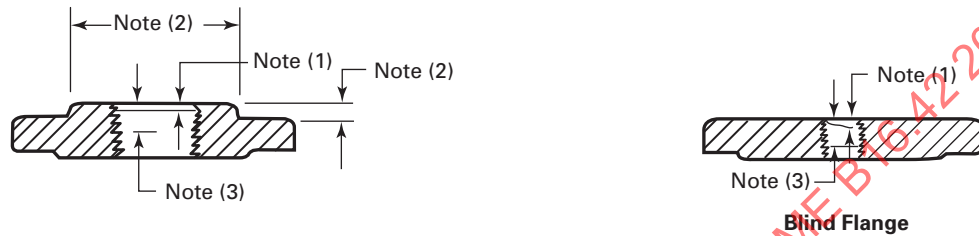


Table 1 Pressure–Temperature Ratings

Temperature, °C	Working Pressure, bar	
	Class 150	Class 300
–29 to 38	17.2	44
50	17.0	43
100	16.0	41
150	14.8	39
200	13.9	36
250	12.1	35
300	10.2	33
343	8.6	31

Table 2 Reducing Threaded Flanges for Classes 150 and 300

NPS [Note (4)]	Smallest Size of Reducing Outlet Requiring Hub Flanges [Note (2)]	NPS [Note (4)]	Smallest Size of Reducing Outlet Requiring Hub Flanges [Note (2)]	NPS [Note (4)]	Smallest Size of Reducing Outlet Requiring Hub Flanges [Note (2)]
1	$\frac{1}{2}$	$3\frac{1}{2}$	$1\frac{1}{2}$	12	$3\frac{1}{2}$
$1\frac{1}{4}$	$\frac{1}{2}$	4	$1\frac{1}{2}$	14	$3\frac{1}{2}$
$1\frac{1}{2}$	$\frac{1}{2}$	5	$1\frac{1}{2}$	16	4
2	1	6	$2\frac{1}{2}$	18	4
$2\frac{1}{2}$	$1\frac{1}{4}$	8	3	20	4
3	$1\frac{1}{4}$	10	$3\frac{1}{2}$	24	4

NOTES:

- (1) Class 150 flanges do not have a counterbore. Class 300 flanges will have a depth of counterbore of 7 mm for NPS 2 and smaller tapings and 9.50 mm for NPS $2\frac{1}{2}$ and larger. The diameter of counterbore, S , is the same as that given in the tables of threaded flanges for the corresponding tapping.
- (2) The hub dimensions shall be at least as large as those of the standard flanges of the size to which the reduction is being made, except flanges reducing to a size smaller than those shown in this column may be made from blind flanges. See example (2) below.
- (3) The minimum length of effective threads shall be at least equal to dimension "Length of Thread" of the corresponding pressure class threaded flange as shown in the tables, but does not necessarily extend to the face of the flange. For threads of threaded flanges, see para. 7.6.
- (4) For method of designating reducing threaded flanges, see para. 4.3 and examples (1) and (2) below.

EXAMPLES:

- (1) The size designation is NPS $6 \times 2\frac{1}{2}$ — Class 300 reducing threaded flange. This flange has the following dimensions:


- (a) NPS $2\frac{1}{2}$, taper pipe thread tapping (ANSI/ASME B1.20.1)
- (b) 320 mm, diameter of regular NPS 6 Class 300 threaded flange
- (c) 35 mm, thickness of regular NPS 6 Class 300 threaded flange
- (d) 180 mm, diameter of hub for regular NPS 5 Class 300 threaded flange
- (e) 15.5 mm, height of hub for regular NPS 5 Class 300 threaded flange

Other dimensions are the same as for regular NPS 6 Class 300 threaded flange; see Table 9.

- (2) The size designation is NPS 6×2 — Class 300 reducing threaded flange. Use regular NPS 6 Class 300 blind flange tapped with NPS 2 taper pipe thread (ANSI/ASME B1.20.1).

Table 3 Dimensions of Class 150 Elbows, Double Branch Elbows, Tees, Crosses, Laterals, True Ys (Straight Sizes), and Reducers

(11)

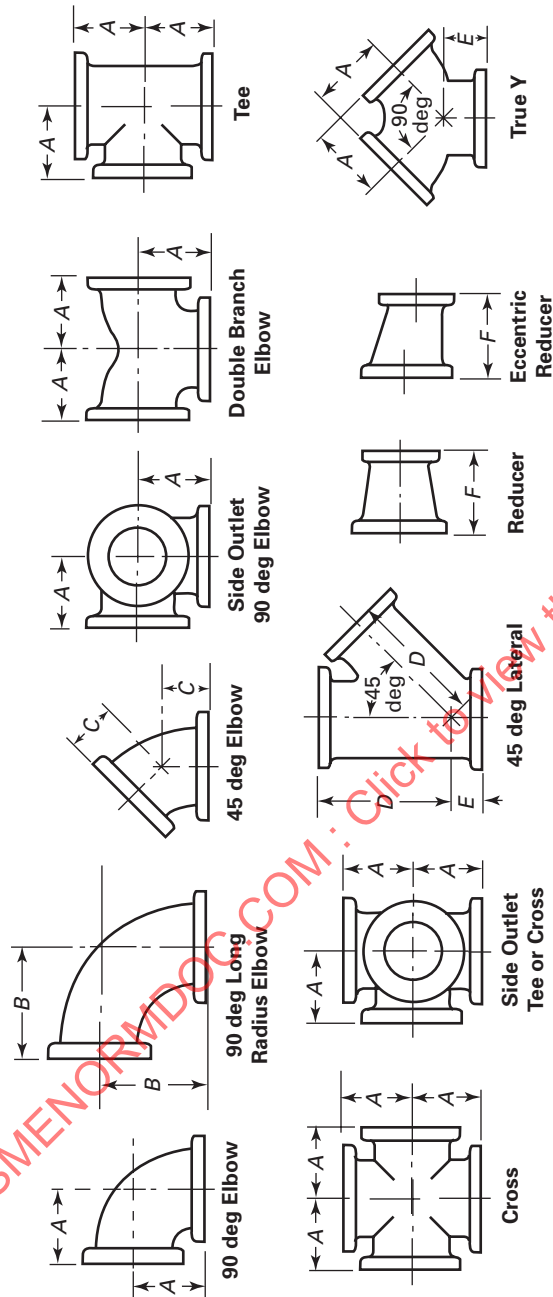

NPS	Inside Diameter of Fittings	Center-to-Face 90 deg Elbow Tees, Crosses, True Y, and Double Branch Elbow, A	Center-to-Face 90 deg Long Radius Elbow, B	Center-to-Face 45 deg Elbow, C	Center-to-Face Lateral, D	Short Center-to-Face True Y and Lateral, E	Face-to-Face Reducer, F	Diameter of Flange	Minimum Thickness of Flange, Q	Minimum Body Wall Thickness
1	25	89	127	45	146	45	114	106	11.1	4.0
1 1/4	32	95	140	51	159	45	114	118	12.7	4.8
1 1/2	38	102	152	57	178	51	114	127	14.3	4.8
2	51	114	165	64	203	64	127	152	15.9	5.6
2 1/2	64	127	178	76	241	64	140	178	17.5	5.6
3	76	140	197	76	254	76	152	191	19.0	5.6
3 1/2	89	152	216	89	292	76	165	216	20.6	6.3
4	102	165	229	102	305	76	178	229	23.8	6.3
5	127	191	260	114	343	89	203	254	23.8	7.1
6	152	203	292	127	368	89	229	279	25.4	7.1


(11) **Table 3 Dimensions of Class 150 Elbows, Double Branch Elbows, Tees, Crosses, Laterals, True Ys (Straight Sizes), and Reducers (Cont'd)**

NPS	Inside Diameter of Fittings	Center-to-Face 90 deg Elbow Tees, Crosses, True Y, and Double Branch Elbow, A	Center-to-Face 90 deg Long Radius Elbow, B	Center-to-Face 45 deg Elbow, C	Center-to-Face Lateral, D	Short Center-to-Face True Y and Lateral, E	Face-to-Face Reducer, F	Diameter of Flange	Minimum Thickness of Flange, Q	Minimum Body Wall Thickness
8	203	229	356	140	445	114	279	343	28.6	7.9
10	254	279	419	165	521	127	305	406	30.2	8.6
12	305	305	483	191	622	140	356	483	31.8	9.5
14	356	356	546	191	686	152	406	533	34.9	10.3
16	406	381	610	203	762	165	457	597	36.5	11.1
18	457	419	673	216	813	178	483	635	39.7	11.9
20	508	457	737	241	889	203	508	699	42.9	12.7
24	610	559	864	279	1 029	229	610	813	47.6	14.3

GENERAL NOTES:

- (a) Dimensions are in millimeters; reference Table 3 Illustration on previous page.
 (b) For tolerances, see section 8.
 (c) For facings, see para. 7.2.
 (d) For flange bolt holes, see para. 7.3 and Table 8.
 (e) For spot facing, see para. 7.4.
 (f) For center-to-contact-surface and center-to-end dimensions of reducing fittings, see para. 7.1.
 (g) For contact-surface-to-contact-surface and end-to-end dimensions of reducers and eccentric reducers, see para. 7.1.
 (h) For intersecting centerlines, and center-to-contact-surface and center-to-end dimensions of side-outlet fittings, see para. 7.1.
 (i) For center-to-contact-surface and center-to-end dimensions of special-degree elbows, see para. 7.1.
 (j) For drains, see para. 7.9.

Table 4 Dimensions of Class 300 Elbows, Tees, Crosses, Laterals, True Ys (Straight Sizes), and Reducers

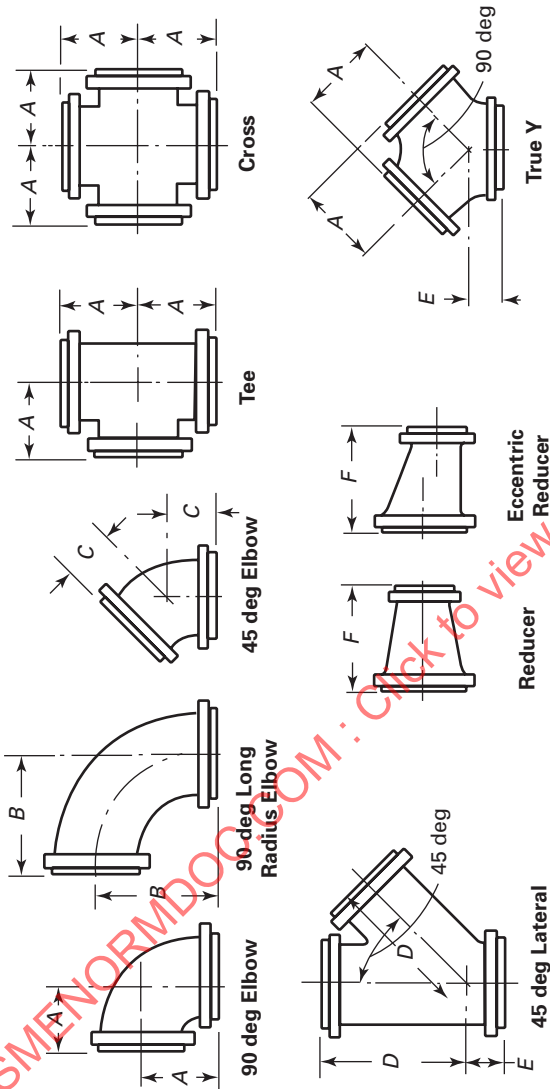

NPS	Minimum Inside Diameter of Fittings	Center-to-Face 90 deg Elbow Tees, Crosses, and True Y, A	Center-to-Face 90 deg Long Radius Elbow, C	Center-to-Face 45 deg Elbow, C	Center-to-Face Lateral, D	Short Center-to-Face True Y and Lateral, E	Face-to-Face Reducer, F	Diameter of Flange, Q	Minimum Thickness of Flange, Q	Minimum Body Wall Thickness
1	25	102	127	58	165	51	114	124	17.5	4.8
1 1/4	32	108	140	64	184	57	114	133	19.1	4.8
1 1/2	38	114	152	70	216	64	114	156	20.6	4.8
2	51	127	165	76	229	64	127	165	22.3	6.4
2 1/2	64	140	178	89	267	64	140	191	25.4	6.4
3	78	152	197	89	279	76	152	210	28.4	7.1
3 1/2	89	165	216	102	318	76	165	229	30.2	7.4
4	102	178	229	114	343	76	178	254	31.8	7.9
5	127	203	260	127	381	89	203	279	35.0	9.6
6	152	216	292	140	445	102	229	318	38.6	9.6


Table 4 Dimensions of Class 300 Elbows, Tees, Crosses, Laterals, True Ys (Straight Sizes), and Reducers (Cont'd)

NPS	Minimum Inside Diameter of Fittings	Center-to-Face 90 deg Elbow Tees, Crosses, and True Y, A	Center-to-Face 90 deg Long Radius Elbow, C	Center-to-Face 45 deg Elbow, C	Center-to-Face Lateral, D	Short Center-to-Face True Y and Lateral, E	Face-to-Face Reducer, F	Diameter of Flange	Minimum Thickness of Flange, Q	Minimum Body Wall Thickness
8	203	254	356	152	521	127	279	381	41.1	11.2
10	254	292	419	178	610	140	305	444	47.8	12.7
12	305	330	483	203	699	152	356	521	50.8	14.2
14	337	381	546	216	787	159	406	584	53.8	15.7
16	387	419	609	241	876	191	457	648	57.2	17.5
18	432	457	673	254	953	203	483	711	60.4	19.1
20	483	495	737	267	1 029	216	503	775	63.5	20.6
24	584	572	864	305	1 207	254	610	914	69.8	23.9

GENERAL NOTES:

- (a) Dimensions are in millimeters; reference Table 4 Illustration on previous page.
 (b) For tolerances, see section 8.
 (c) For facings, see para. 7.2.
 (d) For flange bolt holes, see para. 7.3 and Table 10.
 (e) For spot facing, see para. 7.4.
 (f) For center-to-contact-surface and center-to-end dimensions of reducing fittings, see para. 7.1.
 (g) For contact-surface-to-contact-surface and end-to-end dimensions of reducers and eccentric reducers, see para. 7.1.
 (h) For intersecting centerlines, and center-to-contact-surface and center-to-end dimensions of side-outlet fittings, see para. 7.1.
 (i) For center-to-contact-surface and center-to-end dimensions of special-degree elbows, see para. 7.1.
 (j) For drains, see para. 7.9.

(11)

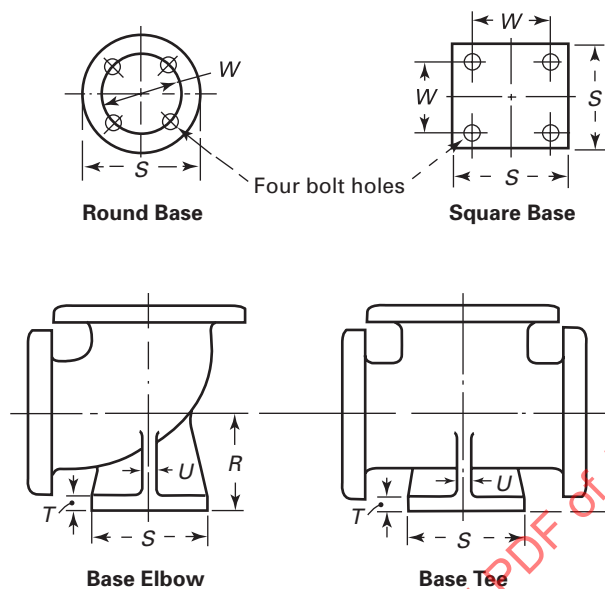Table 5 Dimensions of Class 150 Base Elbows and Base Tees

NPS	Center-to-Base [Note (1)], R	Diameter of Round Base or Width of Square Base [Note (2)], S	Thickness of Base, T	Thickness of Ribs, U	Nominal Size of Supporting Pipe for Base	Base Drilling [Note (3)]	
						Bolt Circle or Bolt Spacing, W	Diameter of Drilled Holes
2	105	118	13	13	1 $\frac{1}{4}$	89	15.9
2 $\frac{1}{2}$	114	118	13	13	1 $\frac{1}{4}$	89	15.9
3	124	127	14	13	1 $\frac{1}{2}$	98	15.9
3 $\frac{1}{2}$	133	127	14	13	1 $\frac{1}{2}$	98	15.9
4	140	152	16	13	2	121	19.0
5	159	178	18	16	2 $\frac{1}{2}$	140	19.0
6	178	178	18	16	2 $\frac{1}{2}$	140	19.0
8	213	229	24	22	4	191	19.0
10	248	229	24	22	4	191	19.0
12	286	279	25	25	6	241	22.2
14	318	279	25	25	6	241	22.2
16	349	279	25	25	6	241	22.2
18	381	343	29	29	8	298	22.2
20	406	343	29	29	8	298	22.2
24	470	343	29	29	8	298	22.2

GENERAL NOTES:


- (a) Dimensions are in millimeters.
 (b) Bases are not finished unless so ordered.

NOTES:

- (1) For reducing fittings, the size and center-to-face dimensions of base are determined by the size of the largest opening of fitting. In the case of reducing base elbows, orders shall specify whether the base shall be opposite the larger or smaller opening.
 (2) The base dimensions apply to all straight and reducing sizes.
 (3) Bolt-hole template shown for round base is the same as for the flange of the supporting pipe size, except using only four holes in all cases, so placed as to straddle centerlines. The bases of these fittings are intended for support in compression and are not to be used for anchors or supports in tension or shear.

Table 6 Dimensions of Class 300 Base Elbows and Base Tees

(11)

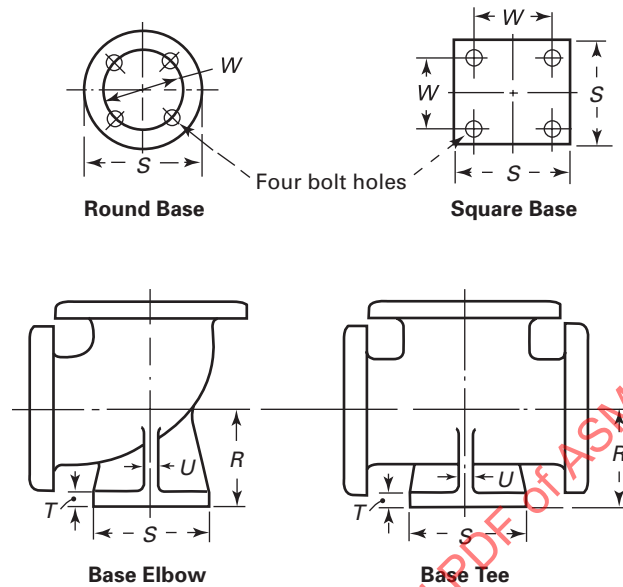

NPS	Center-to-Base [Note (1)], R	Diameter of Round Base or Width of Square Base [Note (2)], S	Thickness of Base, T	Thickness of Ribs, U	Nominal Size of Supporting Pipe for Base	Base Drilling [Note (3)]	
						Bolt Circle or Bolt Spacing, W	Diameter of Drilled Holes
2	114	133	19	13	1 $\frac{1}{4}$	98	19.1
2 $\frac{1}{2}$	121	133	19	13	1 $\frac{1}{4}$	98	19.1
3	133	156	21	16	1 $\frac{1}{2}$	114	22.3
3 $\frac{1}{2}$	143	156	21	16	1 $\frac{1}{2}$	114	22.3
4	152	165	22	16	2	127	19.1
5	171	191	25	19	2 $\frac{1}{2}$	149	22.3
6	191	191	25	19	2 $\frac{1}{2}$	149	22.3
8	229	254	32	22	4	200	22.3
10	267	254	32	22	4	200	22.3
12	305	318	36	25	6	270	22.3
14	343	318	36	25	6	270	22.3
16	375	318	36	28	6	270	22.3
18	413	381	41	28	8	330	25.4
20	454	381	41	32	8	330	25.4
24	527	445	48	32	10	387	28.4


GENERAL NOTES:

- (a) Dimensions are in millimeters.
 (b) Bases are not finished unless so ordered.

NOTES:

- (1) For reducing fittings, the size and center-to-face dimension of base are determined by the size of the largest opening of fitting. In the case of reducing base elbows, orders shall specify whether the base shall be opposite the larger or smaller opening.
 (2) The base dimensions apply to all straight and reducing sizes.
 (3) Bolt-hole template shown for round base is the same as for the flange of the supporting pipe size, except using only four holes in all cases, so placed as to straddle centerlines. The bases of these fittings are intended for support in compression and are not to be used for anchors or supports in tension or shear.

(11)

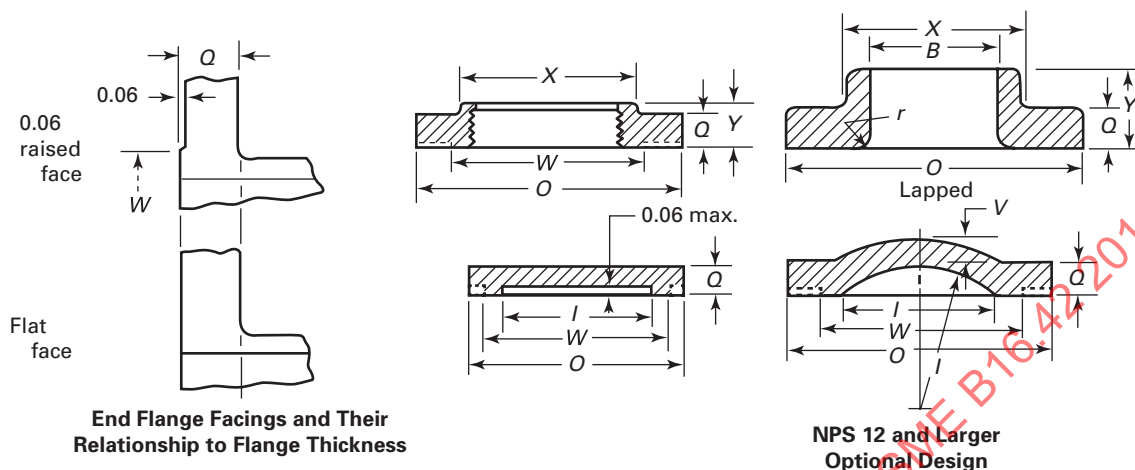Table 7 Dimensions of Class 150 Ductile Iron Flanges

NPS	Diameter of Port, I	Diameter of Flange, O	Minimum Thickness of Flange, Q	Minimum Diameter of Hub [Note (1)], X	Minimum Length of Hub and Threads [Note (2)], Y	Minimum Domed Wall Thickness, V	Diameter of Raised Face, W	Minimum Bore Lapped, B	Corner Radius of Bore of Lapped Flange, r	Hub Length Lapped, Y
1	25	110	14.2	49	18	...	51	35	4	17
1 $\frac{1}{4}$	32	115	15.7	59	21	...	64	44	5	21
1 $\frac{1}{2}$	38	125	17.5	65	22	...	73	50	6	22
2	51	150	19.0	78	25	...	92	62	8	25
2 $\frac{1}{2}$	64	180	22.3	91	29	...	105	75	8	29
3	76	190	23.8	108	30	...	127	91	10	30
3 $\frac{1}{2}$	89	215	23.8	122	32	...	140	104	10	32
4	102	230	23.8	135	33	...	157	117	11	33
5	127	255	23.8	164	37	...	186	144	11	36
6	152	280	25.4	192	40	...	216	172	13	40
8	203	345	28.6	246	44	...	270	222	13	44
10	254	405	30.2	303	49	...	324	277	13	49
12	305	485	31.8	357	56	20.6	381	328	13	56
14	356	535	35.0	391	57	22.2	413	360	13	79
16	406	595	36.5	445	64	25.4	470	419	13	87
18	457	635	39.7	499	68	27.0	533	462	13	97
20	508	700	42.9	553	73	28.6	584	514	13	103
24	610	815	47.6	660	83	31.8	692	616	13	111

GENERAL NOTES:


- Dimensions are in millimeters.
- For tolerances, see section 8.
- For facings, see para. 7.2.
- For flange bolt holes, see para. 7.3 and Table 8.
- For spot facing, see para. 7.4.
- For reducing threaded flanges, see Table 2.
- Blind flanges may be made with or without hubs at the option of the manufacturer.

NOTES:

- This dimension is for large end of the hub, which may be straight or tapered. Taper shall not exceed 7 deg on threaded and lapped flanges.
- For threads of threaded flanges, see para. 7.6.

Table 8 Templates for Drilling Class 150 Ductile Iron Flanges

(11)

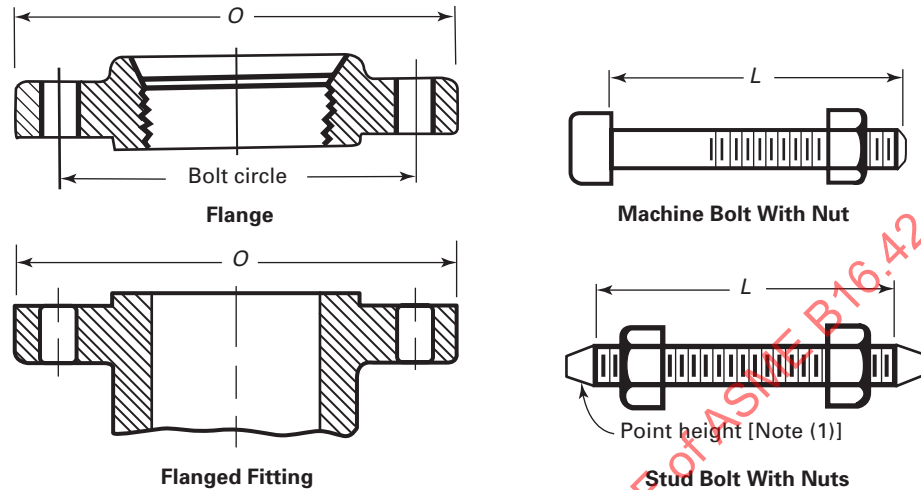

NPS	Outside Diameter of Flange, <i>O</i>	Drilling [Notes (2) and (3)]				Length of Bolts, <i>L</i>	
		Diameter of Bolt Circle	Diameter of Bolt Holes	Number of Bolts	Diameter of Bolts	Stud Bolts [Note (1)]	Machine Bolts
1	110	79.4	$\frac{5}{8}$	4	$\frac{1}{2}$	75	55
1 $\frac{1}{4}$	115	88.9	$\frac{3}{8}$	4	$\frac{1}{2}$	85	55
1 $\frac{1}{2}$	125	98.4	$\frac{5}{8}$	4	$\frac{1}{2}$	85	65
2	150	120.7	$\frac{3}{4}$	4	$\frac{5}{8}$	95	70
2 $\frac{1}{2}$	180	139.7	$\frac{3}{4}$	4	$\frac{5}{8}$	100	75
3	190	152.4	$\frac{3}{4}$	4	$\frac{5}{8}$	100	75
3 $\frac{1}{2}$	215	177.8	$\frac{3}{4}$	8	$\frac{5}{8}$	100	75
4	230	190.5	$\frac{3}{4}$	8	$\frac{5}{8}$	100	75
5	255	215.9	$\frac{7}{8}$	8	$\frac{3}{4}$	110	85
6	280	241.3	$\frac{7}{8}$	8	$\frac{3}{4}$	115	85
8	345	298.5	$\frac{7}{8}$	8	$\frac{3}{4}$	120	90
10	405	362.0	1	12	$\frac{7}{8}$	125	100
12	485	431.8	1	12	$\frac{7}{8}$	135	100
14	535	476.3	1 $\frac{1}{8}$	12	1	145	115
16	595	539.8	1 $\frac{1}{8}$	16	1	145	115
18	635	577.9	1 $\frac{1}{4}$	16	1 $\frac{1}{8}$	160	125
20	700	635.0	1 $\frac{1}{4}$	20	1 $\frac{1}{8}$	170	140
24	815	749.3	1 $\frac{3}{8}$	20	1 $\frac{1}{4}$	185	150


GENERAL NOTES:

- (a) Dimensions are in millimeters except for diameters of bolts and bolt holes, which are in inches.
 (b) For other dimensions, see Tables 3 and 7.

NOTES:

- (1) Length of stud bolts does not include the height of the points.
 (2) For flange bolt holes, see para. 7.3.
 (3) For spot facing, see para. 7.4.

(11)

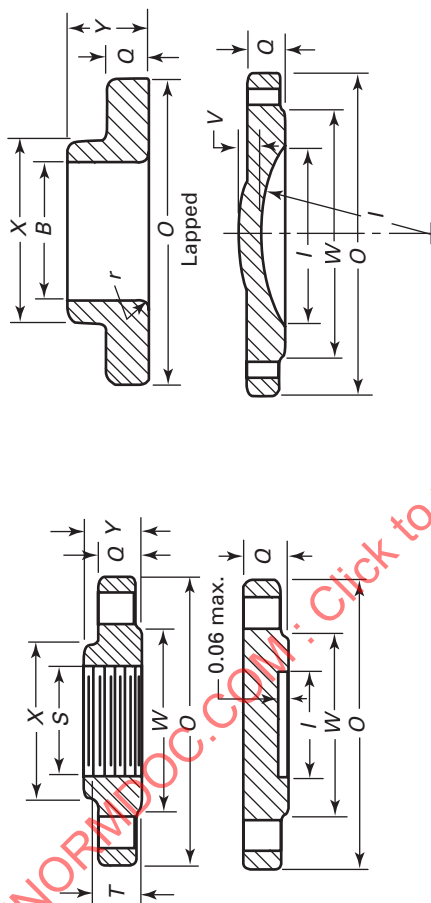

NPS 10 and Larger Optional Design

NPS	Diameter of Port, I	Diameter of Flange, O	Minimum Thickness of Flange, Q	Minimum Diameter of Hub [Note (1)], X	Minimum Length of Hub, Y	Hub Lapped, Y	Minimum Domed Wall Thickness, W	Minimum Length of Threads [Note (2)], T	Minimum Bore Lapped, B	Corner Radius of Bore of Lapped Flange, r	Diameter of Raised Face, W	Diameter of Counterbore, S
1	25	125	17.5	52	27	27	...	18	35	3	51	36
1 $\frac{1}{4}$	32	135	19.1	64	27	27	...	21	44	5	64	44
1 $\frac{1}{2}$	38	155	20.6	70	30	30	...	22	51	6	73	51
2	51	165	22.3	84	33	33	...	29	62	8	92	64
2 $\frac{1}{2}$	64	190	25.4	100	38	38	...	32	75	8	105	76
3	76	210	28.4	117	43	43	...	32	91	10	127	92
3 $\frac{1}{2}$	89	230	30.2	133	44	44	...	36	104	10	140	105
4	102	255	31.8	146	48	48	...	36	117	11	157	118
5	127	280	35.0	178	51	51	...	43	144	11	186	144
6	152	320	36.6	206	52	52	...	46	172	13	216	172

Table 9 Dimensions of Class 300 Ductile Iron Flanges (Cont'd)

NPS	Diameter of Port, I	Diameter of Flange, O	Minimum Thickness of Flange, Q	Minimum Diameter of Hub, [Note (1)], X	Minimum Length of Hub, Y	Hub Lapped, Y	Minimum Dished Wall Thickness, V	Minimum Length of Threads [Note (2)], T	Minimum Bore Lapped, B	Corner Radius of Bore of Lapped Flange, r	Diameter of Raised Face, W	Diameter of Counterbore, S
8	203	380	41.1	260	62	62	...	51	222	13	270	222
10	254	445	47.8	321	67	95	23.9	56	277	13	324	276
12	305	520	50.8	375	73	102	25.4	60	328	13	381	329
14	337	585	53.8	425	76	111	28.6	64	360	13	413	360
16	387	650	57.2	467	83	121	31.8	68	411	13	470	411
18	432	710	60.4	533	89	130	34.9	70	462	13	533	462
20	438	775	63.5	587	95	140	38.1	73	514	13	584	513
24	584	915	69.8	702	106	152	41.3	83	616	13	692	614

GENERAL NOTES:

(a) Dimensions are in millimeters; reference Table 9 Illustration on previous page.

(b) For tolerances, see section 8.

(c) For facings, see para. 7.2.

(d) For flange bolt holes, see para. 7.3 and Table 10.

(e) For spot facing, see para. 7.4.

(f) For reducing threaded flanges, see Table 2.


(g) Blind flanges may be made with or without hub at the option of the manufacturer.

NOTES:

(1) This dimension is for large end of hub, which may be straight or tapered. Taper shall not exceed 7 deg on threaded and lapped flanges.

(2) For threads of threaded flanges, see para. 7.6.

(11)

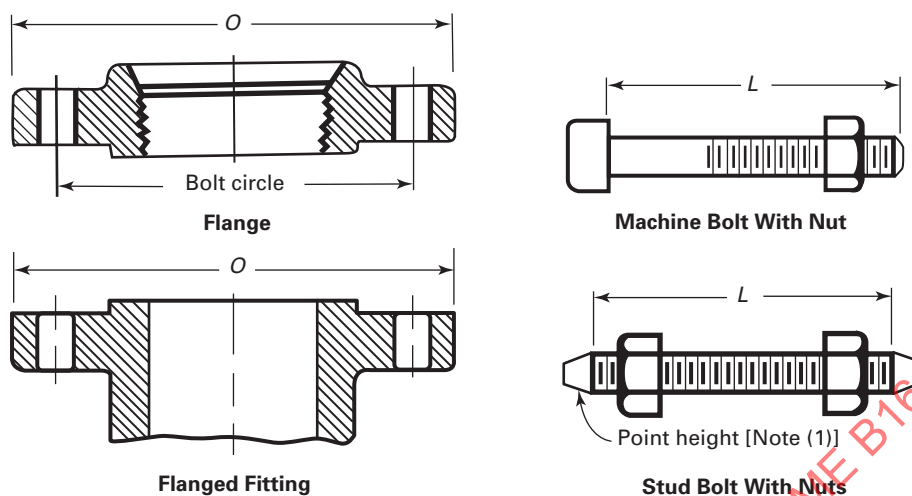Table 10 Templates for Drilling Class 300 Ductile Iron Flanges

NPS	Outside Diameter of Flange, O	Drilling [Notes (2) and (3)]				Length of Bolts, L	
		Diameter of Bolt Circle	Diameter of Bolt Holes	Number of Bolts	Diameter of Bolts	Stud Bolts [Note (1)]	Machine Bolts
1	125	88.9	$\frac{3}{4}$	4	$\frac{5}{8}$	75	65
$1\frac{1}{4}$	135	98.4	$\frac{3}{4}$	4	$\frac{5}{8}$	85	70
$1\frac{1}{2}$	155	114.3	$\frac{7}{8}$	4	$\frac{3}{4}$	90	75
2	165	127.0	$\frac{3}{4}$	8	$\frac{5}{8}$	90	75
$2\frac{1}{2}$	190	149.2	$\frac{7}{8}$	8	$\frac{3}{4}$	100	85
3	210	168.3	$\frac{7}{8}$	8	$\frac{3}{4}$	110	90
$3\frac{1}{2}$	230	184.2	$\frac{7}{8}$	8	$\frac{3}{4}$	110	95
4	255	200.0	$\frac{7}{8}$	8	$\frac{3}{4}$	115	95
5	280	235.0	$\frac{7}{8}$	8	$\frac{3}{4}$	120	110
6	320	269.9	$\frac{7}{8}$	12	$\frac{3}{4}$	120	110
8	380	330.2	1	12	$\frac{7}{8}$	140	120
10	445	387.4	$1\frac{1}{8}$	16	1	160	140
12	520	450.8	$1\frac{1}{4}$	16	$1\frac{1}{8}$	170	145
14	585	514.4	$1\frac{1}{4}$	20	$1\frac{1}{8}$	180	160
16	650	571.5	$1\frac{3}{8}$	20	$1\frac{1}{4}$	190	165
18	710	628.6	$1\frac{3}{8}$	24	$1\frac{1}{4}$	195	170
20	775	685.8	$1\frac{3}{8}$	24	$1\frac{1}{4}$	205	185
24	915	812.8	$1\frac{1}{2}$	24	$1\frac{1}{2}$	230	205

GENERAL NOTES:

- (a) Dimensions are in millimeters except for diameters of bolts and bolt holes, which are in inches.
 (b) For other dimensions, see Tables 4 and 9.

NOTES:

- (1) Length of stud bolts does not include the height of the points.
 (2) For flange bolt holes, see para. 7.3.
 (3) For spot facing, see para. 7.4.

MANDATORY APPENDIX I
PRESSURE-TEMPERATURE RATINGS — DIMENSIONS AND
TEMPLATES OF PIPE FLANGES AND FLANGED FITTINGS
IN U.S. CUSTOMARY UNITS


(11)

See Tables I-1 through I-10.

ASMENORMDOC.COM : Click to view the full PDF of ASME B16.42 2011

Table I-1 Pressure–Temperature Ratings

Temperature, °F	Working Pressure, psi	
	Class 150	Class 300
–20 to 100	250	640
200	235	600
300	215	565
400	200	525
500	170	495
600	140	465
650	125	450

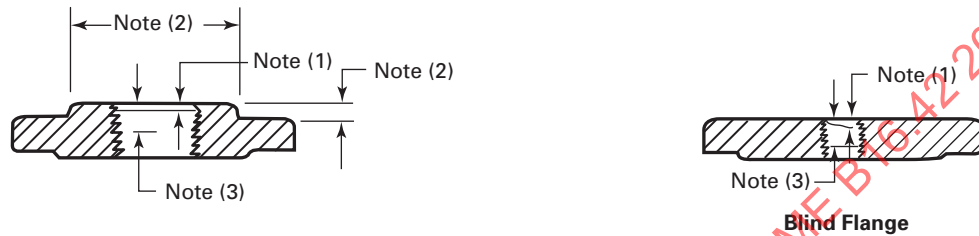Table I-2 Reducing Threaded Flanges for Classes 150 and 300

NPS [Note (4)]	Smallest Size of Reducing Outlet Requiring Hub Flanges [Note (2)]	NPS [Note (4)]	Smallest Size of Reducing Outlet Requiring Hub Flanges [Note (2)]	NPS [Note (4)]	Smallest Size of Reducing Outlet Requiring Hub Flanges [Note (2)]
1	$\frac{1}{2}$	$3\frac{1}{2}$	$1\frac{1}{2}$	12	$3\frac{1}{2}$
$1\frac{1}{4}$	$\frac{1}{2}$	4	$1\frac{1}{2}$	14	$3\frac{1}{2}$
$1\frac{1}{2}$	$\frac{1}{2}$	5	$1\frac{1}{2}$	16	4
2	1	6	$2\frac{1}{2}$	18	4
$2\frac{1}{2}$	$1\frac{1}{4}$	8	3	20	4
3	$1\frac{1}{4}$	10	$3\frac{1}{2}$	24	4

NOTES:

- (1) Class 150 flanges do not have a counterbore. Class 300 flanges will have a depth of counterbore of 0.25 in. for NPS 2 and smaller tapings and 0.38 in. for NPS $2\frac{1}{2}$ and larger. The diameter of counterbore, S, is the same as that given in the tables of threaded flanges for the corresponding tapping.
- (2) The hub dimensions shall be at least as large as those of the standard flanges of the size to which the reduction is being made, except flanges reducing to a size smaller than those shown in this column may be made from blind flanges. See example (2) below.
- (3) The minimum length of effective threads shall be at least equal to dimension "Length of Thread" of the corresponding pressure class threaded flange as shown in the tables, but does not necessarily extend to the face of the flange. For threads of threaded flanges, see para. 7.6.
- (4) For method of designating reducing threaded flanges, see para. 4.3 and examples (1) and (2) below.


EXAMPLES:

- (1) The size designation is NPS 6 × $2\frac{1}{2}$ — Class 300 reducing threaded flange. This flange has the following dimensions:
 - (a) NPS $2\frac{1}{2}$, taper pipe thread tapping (ANSI/ASME B1.20.1)
 - (b) 12.5 in., diameter of regular NPS 6 Class 300 threaded flange
 - (c) 1.44 in., thickness of regular NPS 6 Class 300 threaded flange
 - (d) 7.0 in., diameter of hub for regular NPS 5 Class 300 threaded flange
 - (e) 0.62 in., height of hub for regular NPS 5 Class 300 threaded flange

Other dimensions are the same as for regular NPS 6 Class 300 threaded flange; see Table I-9.

- (2) The size designation is NPS 6 × 2 — Class 300 reducing threaded flange. Use regular NPS 6 Class 300 blind flange tapped with NPS 2 taper pipe thread (ANSI/ASME B1.20.1).

Table I-3 Dimensions of Class 150 Elbows, Double Branch Elbows, Tees, Crosses, Laterals, True Ys (Straight Sizes), and Reducers

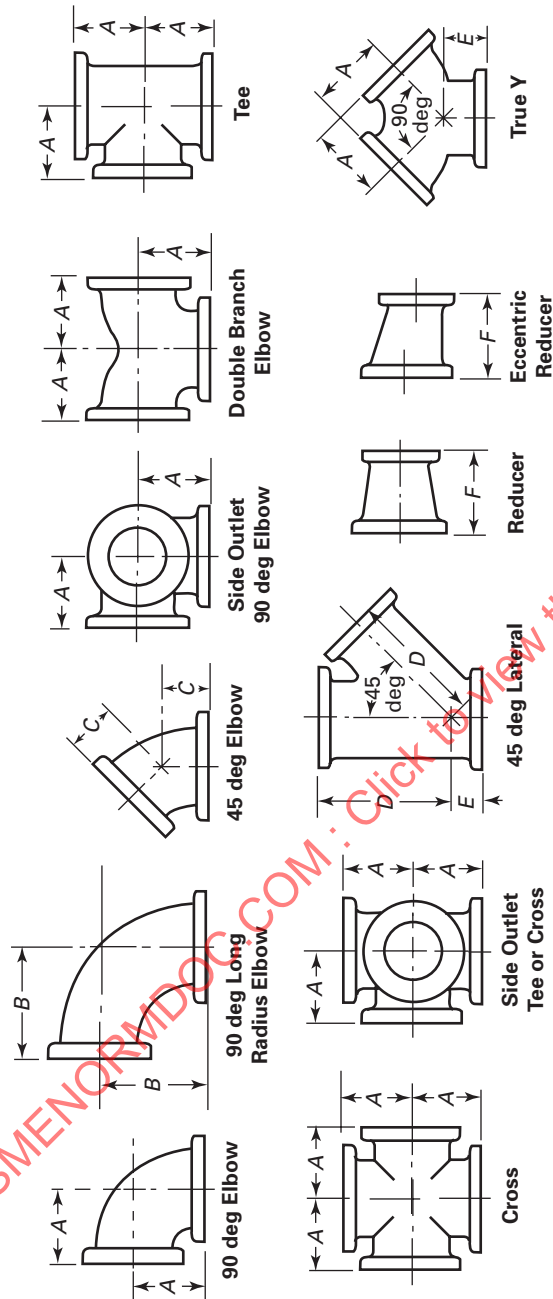

NPS	Inside Diameter of Fittings	Center-to-Face 90 deg Elbow Tees, Crosses, True Y, and Double Branch Elbow, A	Center-to-Face 90 deg Long Radius Elbow, Tee or Cross, B	Center-to-Face 45 deg Elbow, C	Center-to-Face 45 deg Lateral, D	Short Center-to-Face True Y and Lateral, E	Face-to-Face Reducer, F	Diameter of Flange	Minimum Thickness of Flange, Q	Minimum Body Wall Thickness
1	1.00	3.50	5.00	1.75	5.75	1.75	4.50	4.25	0.44	0.16
1 1/4	1.25	3.75	5.50	2.00	6.25	1.75	4.50	4.62	0.50	0.19
1 1/2	1.50	4.00	6.00	2.25	7.00	2.00	4.50	5.00	0.56	0.19
2	2.00	4.50	6.50	2.50	8.00	2.50	5.00	6.00	0.62	0.22
2 1/2	2.50	5.00	7.00	3.00	9.50	2.50	5.50	7.00	0.69	0.22
3	3.00	5.50	7.75	3.00	10.00	3.00	6.00	7.50	0.75	0.22
3 1/2	3.50	6.00	8.50	3.50	11.50	3.00	6.50	8.50	0.81	0.25
4	4.00	6.50	9.00	4.00	12.00	3.00	7.00	9.00	0.94	0.25
5	5.00	7.50	10.25	4.50	13.50	3.50	8.00	10.00	0.94	0.28
6	6.00	8.00	11.50	5.00	14.50	3.50	9.00	11.00	1.00	0.28


Table I-3 Dimensions of Class 150 Elbows, Double Branch Elbows, Tees, Crosses, Laterals, True Ys (Straight Sizes), and Reducers (Cont'd)

NPS	Inside Diameter of Fittings	Center-to-Face 90 deg Elbow Tees, Crosses, True Y, and Double Branch Elbow, A	Center-to-Face 90 deg Long Radius Elbow, B	Center-to-Face 45 deg Elbow, C	Center-to-Face Lateral, D	Short Center-to-Face True Y and Lateral, E	Face-to-Face Reducer, F	Diameter of Flange	Minimum Thickness of Flange, Q	Minimum Body Wall Thickness
8	8.00	9.00	14.00	5.50	17.50	4.50	11.00	13.50	1.12	0.31
10	10.00	11.00	16.50	6.50	20.50	5.00	12.00	16.00	1.19	0.34
12	12.00	12.00	19.00	7.50	24.50	5.50	14.00	19.00	1.25	0.38
14	13.25	14.00	21.50	7.50	27.00	6.00	16.00	21.00	1.38	0.41
16	15.25	15.00	24.00	8.00	30.00	6.50	18.00	23.50	1.44	0.44
18	17.25	16.50	26.50	8.50	32.00	7.00	19.00	25.00	1.56	0.47
20	19.25	18.00	29.00	9.50	35.00	8.00	20.00	27.50	1.69	0.50
24	23.25	22.00	34.00	11.00	40.50	9.00	24.00	32.00	1.88	0.57

GENERAL NOTES:

- (a) Dimensions are in inches; reference Table I-3 Illustration on previous page.
- (b) For tolerances, see section 8.
- (c) For facings, see para. 7.2.
- (d) For flange bolt holes, see para. 7.3 and Table I-8.
- (e) For spot facing, see para. 7.4.
- (f) For center-to-contact-surface and center-to-end dimensions of reducing fittings, see para. 7.1.
- (g) For contact-surface-to-contact-surface and end-to-end dimensions of reducers and eccentric reducers, see para. 7.1.
- (h) For intersecting centerlines, and center-to-contact-surface and center-to-end dimensions of side-outlet fittings, see para. 7.1.
- (i) For center-to-contact-surface and center-to-end dimensions of special-degree elbows, see para. 7.1.
- (j) For drains, see para. 7.9.

Table I-4 Dimensions of Class 300 Elbows, Tees, Crosses, Laterals, True Ys (Straight Sizes), and Reducers

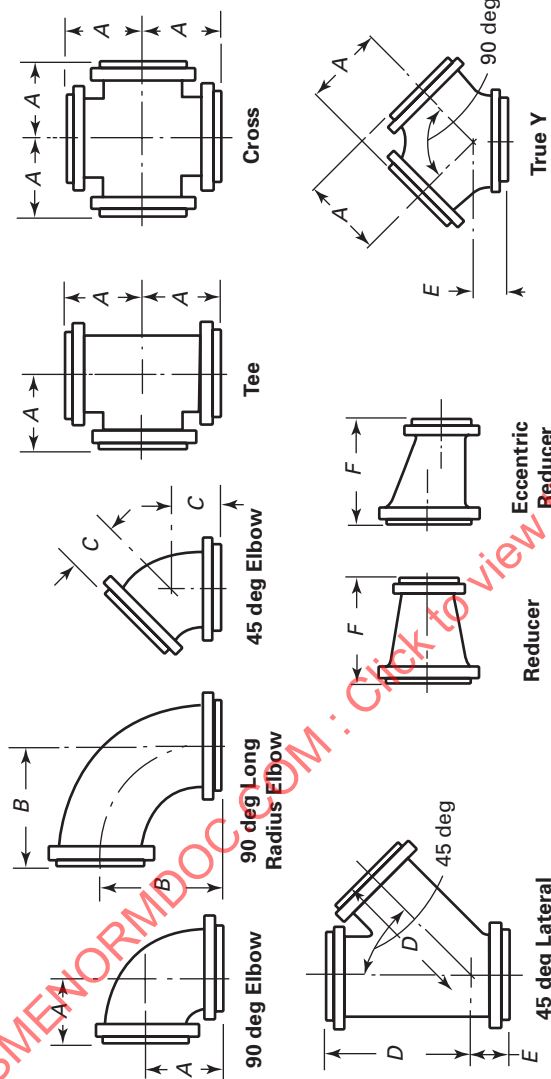

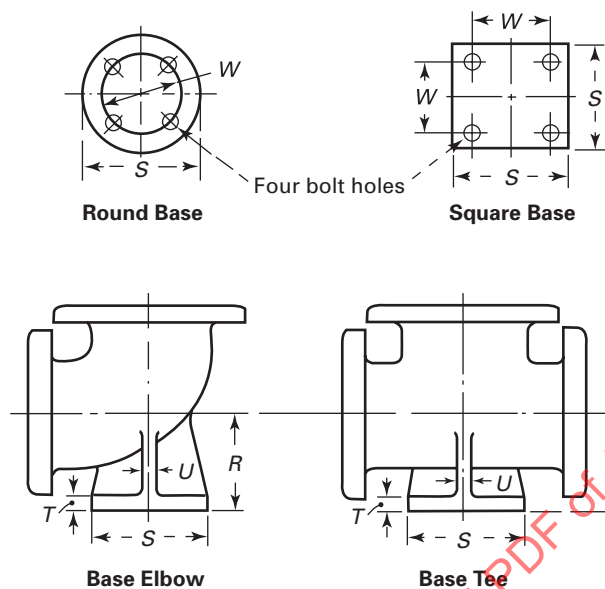
NPS	Minimum Inside Diameter of Fittings	Center-to-Face 90 deg Elbow Tees, Crosses, and True Y, A	Center-to-Face 90 deg Long Radius Elbow, C	Center-to-Face 45 deg Elbow, C	Center-to-Face Lateral, D	Short Center-to-Face True Y and Lateral, E	Face-to-Face Reducer, F	Diameter of Flange, Q	Minimum Thickness of Flange, Q	Minimum Body Wall Thickness
1	1.00	4.00	5.00	2.25	6.50	2.00	4.50	4.88	0.69	0.19
1 1/4	1.25	4.25	5.50	2.50	7.25	2.25	4.50	5.25	0.75	0.19
1 1/2	1.50	4.50	6.00	2.75	8.50	2.50	4.50	6.12	0.81	0.19
2	2.00	5.00	6.50	3.00	9.00	2.50	5.00	6.50	0.88	0.25
2 1/2	2.50	5.50	7.00	3.50	10.50	2.50	5.50	7.50	1.00	0.25
3	3.00	6.00	7.75	3.50	11.00	3.00	6.00	8.25	1.12	0.28
3 1/2	3.50	6.50	8.50	4.00	12.50	3.00	6.50	9.00	1.19	0.29
4	4.00	7.00	9.00	4.50	13.50	3.00	7.00	10.00	1.25	0.31
5	5.00	8.00	10.25	5.00	15.00	3.50	8.00	11.00	1.38	0.38
6	6.00	8.50	11.50	5.50	17.50	4.00	9.00	12.50	1.44	0.38

Table I-4 Dimensions of Class 300 Elbows, Tees, Crosses, Laterals, True Ys (Straight Sizes), and Reducers (Cont'd)

NPS	Minimum Inside Diameter of Fittings	Center-to-Face 90 deg Elbow Tees, Crosses, and True Y, A	Center-to-Face 90 deg Long Radius Elbow, C	Center-to-Face 45 deg Elbow, C	Center-to-Face Lateral, D	Short Center-to-Face True Y and Lateral, E	Face-to-Face Reducer, F	Diameter of Flange	Minimum Thickness of Flange, Q	Minimum Body Wall Thickness
8	8.00	10.00	14.00	6.00	20.50	5.00	11.00	15.00	1.62	0.44
10	10.00	11.50	16.50	7.00	24.00	5.50	12.00	17.50	1.88	0.50
12	12.00	13.00	19.00	8.00	27.50	6.00	14.00	20.50	2.00	0.56
14	13.25	15.00	21.50	8.50	31.00	6.50	16.00	23.00	2.12	0.62
16	15.25	16.50	24.00	9.50	34.50	7.50	18.00	25.50	2.25	0.69
18	17.00	18.00	26.50	10.00	37.50	8.00	19.00	28.00	2.38	0.75
20	19.00	19.50	29.00	10.50	40.50	8.50	20.00	30.50	2.50	0.81
24	23.00	22.50	34.00	12.00	47.50	10.00	24.00	36.00	2.75	0.94

GENERAL NOTES:

- (a) Dimensions are in inches; reference Table I-4 Illustration on previous page.
 (b) For tolerances, see section 8.
 (c) For facings, see para. 7.2.
 (d) For flange bolt holes, see para. 7.3 and Table I-10.
 (e) For spot facing, see para. 7.4.
 (f) For center-to-contact-surface and center-to-end dimensions of reducing fittings, see para. 7.1.
 (g) For contact-surface-to-contact-surface and end-to-end dimensions of reducers and eccentric reducers, see para. 7.1.
 (h) For intersecting centerlines, and center-to-contact-surface and center-to-end dimensions of side-outlet fittings, see para. 7.1.
 (i) For center-to-contact-surface and center-to-end dimensions of special-degree elbows, see para. 7.1.
 (j) For drains, see para. 7.9.

Table I-5 Dimensions of Class 150 Base Elbows and Base Tees


NPS	Center-to-Base [Note (1)], R	Diameter of Round Base or Width of Square Base [Note (2)], S	Thickness of Base, T	Thickness of Ribs, U	Nominal Size of Supporting Pipe for Base	Base Drilling [Note (3)]	
						Bolt Circle or Bolt Spacing, W	Diameter of Drilled Holes
2	4.12	4.62	0.50	0.50	1 $\frac{1}{4}$	3.50	0.62
2 $\frac{1}{2}$	4.50	4.62	0.50	0.50	1 $\frac{1}{4}$	3.50	0.62
3	4.88	5.00	0.56	0.50	1 $\frac{1}{2}$	3.88	0.62
3 $\frac{1}{2}$	5.25	5.00	0.56	0.50	1 $\frac{1}{2}$	3.88	0.62
4	5.50	6.00	0.62	0.50	2	4.75	0.75
5	6.25	7.00	0.69	0.62	2 $\frac{1}{2}$	5.50	0.75
6	7.00	7.00	0.69	0.62	2 $\frac{1}{2}$	5.50	0.75
8	8.38	9.00	0.94	0.88	4	7.50	0.75
10	9.75	9.00	0.94	0.88	4	7.50	0.75
12	11.25	11.00	1.00	1.00	6	9.50	0.88
14	12.50	11.00	1.00	1.00	6	9.50	0.88
16	13.75	11.00	1.00	1.00	6	9.50	0.88
18	15.00	13.50	1.12	1.12	8	11.75	0.88
20	16.00	13.50	1.12	1.12	8	11.75	0.88
24	18.50	13.50	1.12	1.12	8	11.75	0.88

GENERAL NOTES:

- (a) Dimensions are in inches.
 (b) Bases are not finished unless so ordered.

NOTES:

- (1) For reducing fittings, the size and center-to-face dimensions of base are determined by the size of the largest opening of fitting. In the case of reducing base elbows, orders shall specify whether the base shall be opposite the larger or smaller opening.
 (2) The base dimensions apply to all straight and reducing sizes.
 (3) Bolt-hole template shown for round base is the same as for the flange of the supporting pipe size, except using only four holes in all cases, so placed as to straddle centerlines. The bases of these fittings are intended for support in compression and are not to be used for anchors or supports in tension or shear.

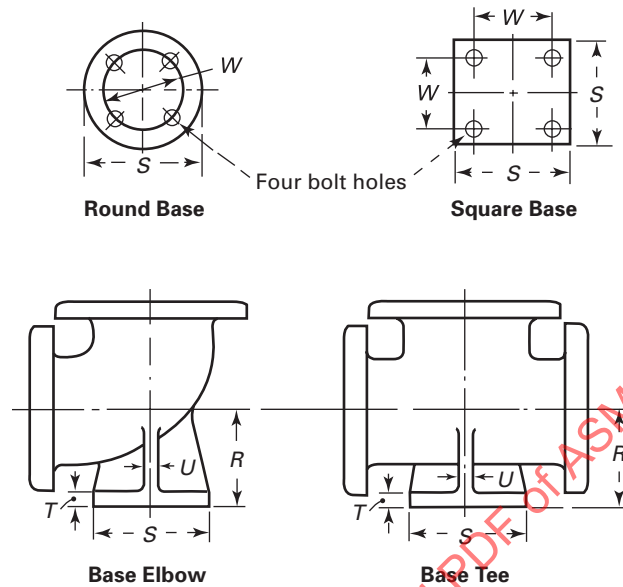Table I-6 Dimensions of Class 300 Base Elbows and Base Tees

NPS	Center-to-Base [Note (1)], R	Diameter of Round Base or Width of Square Base [Note (2)], S	Thickness of Base, T	Thickness of Ribs, U	Nominal Size of Supporting Pipe for Base	Base Drilling [Note (3)]	
						Bolt Circle or Bolt Spacing, W	Diameter of Drilled Holes
2	4.50	5.25	0.75	0.50	1 $\frac{1}{4}$	3.88	0.75
2 $\frac{1}{2}$	4.75	5.25	0.75	0.50	1 $\frac{1}{4}$	3.88	0.75
3	5.25	6.12	0.81	0.62	1 $\frac{1}{2}$	4.50	0.88
3 $\frac{1}{2}$	5.62	6.12	0.81	0.62	1 $\frac{1}{2}$	4.50	0.88
4	6.00	6.50	0.88	0.62	2	5.00	0.75
5	6.75	7.50	1.00	0.75	2 $\frac{1}{2}$	5.88	0.88
6	7.50	7.50	1.00	0.75	2 $\frac{1}{2}$	5.88	0.88
8	9.00	10.00	1.25	0.88	4	7.88	0.88
10	10.50	10.00	1.25	0.88	4	7.88	0.88
12	12.00	12.50	1.44	1.00	6	10.62	0.88
14	13.50	12.50	1.44	1.00	6	10.62	0.88
16	14.75	12.50	1.44	1.12	6	10.62	0.88
18	16.25	15.00	1.62	1.12	8	13.00	1.00
20	17.88	15.00	1.62	1.25	8	13.00	1.00
24	20.75	17.50	1.88	1.25	10	15.25	1.12


GENERAL NOTES:

- (a) Dimensions are in inches.
 (b) Bases are not finished unless so ordered.

NOTES:

- (1) For reducing fittings, the size and center-to-face dimension of base are determined by the size of the largest opening of fitting. In the case of reducing base elbows, orders shall specify whether the base shall be opposite the larger or smaller opening.
 (2) The base dimensions apply to all straight and reducing sizes.
 (3) Bolt-hole template shown for round base is the same as for the flange of the supporting pipe size, except using only four holes in all cases, so placed as to straddle centerlines. The bases of these fittings are intended for support in compression and are not to be used for anchors or supports in tension or shear.

Table I-7 Dimensions of Class 150 Ductile Iron Flanges

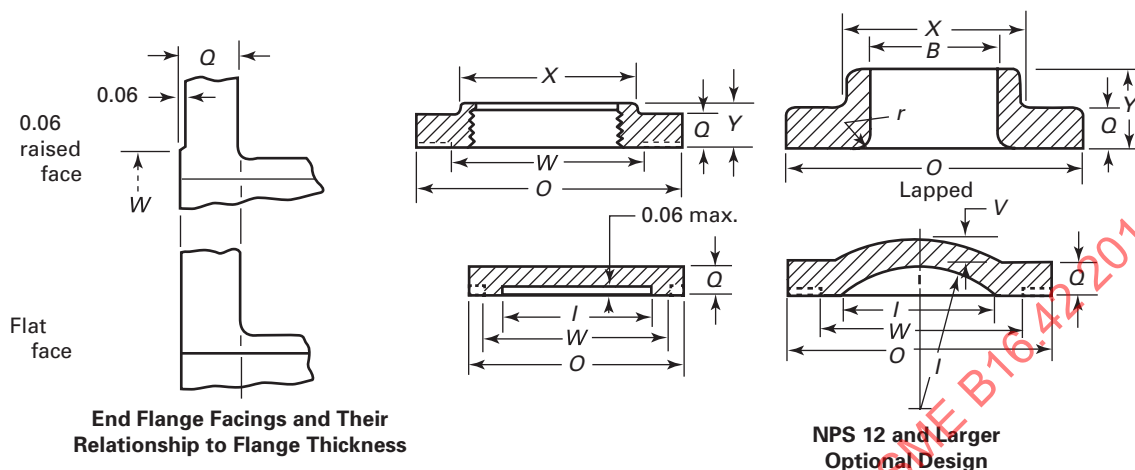


NPS	Diameter of Port, I	Diameter of Flange, O	Minimum Thickness of Flange, Q	Minimum Diameter of Hub [Note (1)], X	Minimum Length of Hub and Threads [Note (2)], Y	Minimum Domed Wall Thickness, V	Diameter of Raised Face, W	Minimum Bore Lapped, B	Corner Radius of Bore of Lapped Flange, r	Hub Length Lapped, Y
1	1.00	4.25	0.56	1.94	0.69	...	2.00	1.38	0.12	0.69
1 $\frac{1}{4}$	1.25	4.62	0.62	2.31	0.81	...	2.50	1.72	0.19	0.81
1 $\frac{1}{2}$	1.50	5.00	0.69	2.56	0.88	...	2.88	1.97	0.25	0.88
2	2.00	6.00	0.75	3.06	1.00	...	3.62	2.46	0.31	1.00
2 $\frac{1}{2}$	2.50	7.00	0.88	3.56	1.12	...	4.12	2.97	0.31	1.12
3	3.00	7.50	0.94	4.25	1.19	...	5.00	3.60	0.38	1.19
3 $\frac{1}{2}$	3.50	8.50	0.94	4.81	1.25	...	5.50	4.10	0.38	1.25
4	4.00	9.00	0.94	5.31	1.31	...	6.19	4.60	0.44	1.31
5	5.00	10.00	0.94	6.44	1.44	...	7.31	5.69	0.44	1.44
6	6.00	11.00	1.00	7.56	1.56	...	8.50	6.75	0.50	1.56
8	8.00	13.50	1.12	9.69	1.75	...	10.62	8.75	0.50	1.75
10	10.00	16.00	1.19	12.00	1.94	...	12.75	10.92	0.50	1.94
12	12.00	19.00	1.25	14.38	2.19	0.81	15.00	12.92	0.50	2.19
14	14.00	21.00	1.38	15.75	2.25	0.88	16.25	14.18	0.50	3.12
16	16.00	23.50	1.44	18.00	2.50	1.00	18.50	16.19	0.50	3.44
18	18.00	25.00	1.56	19.88	2.69	1.06	21.00	18.20	0.50	3.81
20	20.00	27.50	1.69	22.00	2.88	1.12	23.00	20.25	0.50	4.06
24	24.00	32.00	1.88	26.12	3.25	1.25	27.25	24.25	0.50	4.38

GENERAL NOTES:

- Dimensions are in inches.
- For tolerances, see section 8.
- For facings, see para. 7.2.
- For flange bolt holes, see para. 7.3 and Table I-8.
- For spot facing, see para. 7.4.
- For reducing threaded flanges, see Table I-2.
- Blind flanges may be made with or without hubs at the option of the manufacturer.

NOTES:

- This dimension is for large end of the hub, which may be straight or tapered. Taper shall not exceed 7 deg on threaded and lapped flanges.
- For threads of threaded flanges, see para. 7.6.

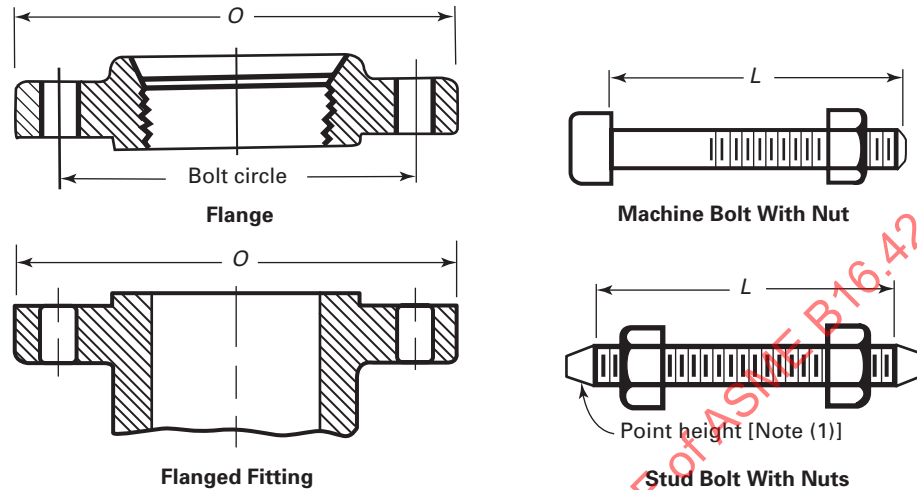Table I-8 Templates for Drilling Class 150 Ductile Iron Flanges

NPS	Outside Diameter of Flange, <i>O</i>	Drilling [Notes (2) and (3)]				Length of Bolts, <i>L</i>	
		Diameter of Bolt Circle	Diameter of Bolt Holes	Number of Bolts	Diameter of Bolts	Stud Bolts [Note (1)]	Machine Bolts
1	4.25	3.12	0.62	4	$\frac{1}{2}$	2.75	2.25
$1\frac{1}{4}$	4.62	3.50	0.62	4	$\frac{1}{2}$	2.75	2.50
$1\frac{1}{2}$	5.00	3.88	0.62	4	$\frac{1}{2}$	3.00	2.50
2	6.00	4.75	0.75	4	$\frac{5}{8}$	3.25	2.75
$2\frac{1}{2}$	7.00	5.50	0.75	4	$\frac{5}{8}$	3.50	3.00
3	7.50	6.00	0.75	4	$\frac{5}{8}$	3.75	3.25
$3\frac{1}{2}$	8.50	7.00	0.75	8	$\frac{5}{8}$	3.75	3.25
4	9.00	7.50	0.75	8	$\frac{5}{8}$	3.75	3.25
5	10.00	8.50	0.88	8	$\frac{3}{4}$	4.00	3.25
6	11.00	9.50	0.88	8	$\frac{3}{4}$	4.00	3.50
8	13.50	11.75	0.88	8	$\frac{3}{4}$	4.25	3.75
10	16.00	14.25	1.00	12	$\frac{7}{8}$	4.75	4.00
12	19.00	17.00	1.00	12	$\frac{7}{8}$	4.75	4.25
14	21.00	18.75	1.12	12	1	5.25	4.50
16	23.50	21.25	1.12	16	1	5.50	4.75
18	25.00	22.75	1.25	16	$1\frac{1}{8}$	6.00	5.00
20	27.50	25.00	1.25	20	$1\frac{1}{8}$	6.25	5.50
24	32.00	29.50	1.38	20	$1\frac{1}{4}$	7.00	6.00

GENERAL NOTES:

- (a) Dimensions are in inches.
 (b) For other dimensions, see Tables I-3 and I-7.

NOTES:

- (1) Length of stud bolts does not include the height of the points.
 (2) For flange bolt holes, see para. 7.3.
 (3) For spot facing, see para. 7.4.