

INTERNATIONAL
STANDARD

ISO/IEC
8882-3

First edition
1991-12-01

Information technology — Telecommunications and information exchange between systems — X.25-DTE conformance testing —

Part 3:

Packet layer conformance test suite

Technologies de l'information — Télécommunications et échange d'informations entre systèmes — Tests de conformité à X.25 des ETTD —

Partie 3: Suite de tests de conformité pour le niveau paquet



Reference number
ISO/IEC 8882-3 : 1991 (E)

Contents

Page

Foreword.....	iii
Introduction.....	iv
1 Scope.....	1
2 Normative references.....	1
3 Definitions.....	2
3.1 Reference model definitions.....	2
3.2 Conformance testing definitions.....	2
3.3 X.25-DTE conformance testing definitions.....	2
3.4 Additional definitions.....	2
4 Abbreviations.....	3
5 Conformance.....	3
6 Test suite information.....	3
6.1 Packet layer test suite structure.....	3
6.2 Packet layer initialization.....	4
6.3 DTE-initiated actions.....	6
6.4 Timer definitions.....	6
6.5 Cause codes and diagnostic codes.....	6
6.6 Data transfer states.....	7
6.7 Other user data fields.....	7
6.8 Transient states.....	7
6.9 Relationship of PICS to test suite.....	7
6.10 Relationship of PIXIT to test suite.....	7
6.11 PIXIT proforma.....	8
6.12 Acceptable unexpected responses.....	23
6.13 Implicit send.....	23
6.14 Basic interconnection tests.....	23
7 TTCN abstract test suite.....	25
8 Use of the PICS and PIXIT based abstract test selection rules.....	550
8.1 Packet layer group selection based on service.....	550
Annex A Test summary tables.....	678

© ISO/IEC 1991

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

ISO/IEC Copyright Office • Case postale 56 • CH-1211 Genève 20 • Switzerland
Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 8882-3 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*.

ISO/IEC 8882 consists of the following parts, under the general title *Information technology — Telecommunications and information exchange between systems — X.25-DTE conformance testing*

- *Part 1: General principles*
- *Part 2: Data link layer test suite*
- *Part 3: Packet layer conformance test suite*

Annex A forms an integral part of this part of ISO/IEC 8882.

Introduction

This part of ISO/IEC 8882 specifies a set of tests to evaluate Data Terminal Equipment (DTE) conformance to International Standards ISO 7776 (X.25 LAPB) and/or ISO 8208 (X.25 Packet Layer). ISO 7776 and ISO 8208 allow for a DTE to interface with a Data Circuit-Terminating Equipment (DCE) conforming to CCITT Recommendation X.25 or to another DTE conforming to ISO 7776 and/or ISO 8208. ISO 8208 also allows for connection to Local Area Networks.

CCITT Recommendation X.25 1980 and X.25 1984 are written from the perspective of a DCE and therefore do not explicitly specify the DTE operation. However, recommended operation of DTEs is included by implication because of the need to communicate with X.25 DCEs. Tests within this part of ISO/IEC 8882 pertaining to X.25 1980 and X.25 1984 are based on the DTE operational characteristics implied by CCITT X.25.

This part of ISO/IEC 8882 presents the packet layer aspects for evaluating conformance to ISO 8208 and follows the procedures and guidelines defined in ISO/IEC 9646.

Where it is claimed that X.25 is used to provide the OSI Network Layer Service, the conformance tests as defined in this part of ISO/IEC 8882 can be used to verify the implementation of the necessary protocol elements.

The test suite is presented in an abstract form by means of the test case notation TTCN, as defined in ISO/IEC 9646-3. This is an abstract set of tests not every test applies to every public network or every type of DTE.

Information technology — Telecommunications and information exchange between systems — X.25-DTE conformance testing —

Part 3: Packet layer conformance test suite

1 Scope

This International Standard specifies a set of abstract tests for verifying that the implementation of X.25 protocols, for use by Data Terminal Equipment (DTE), conform to the requirements of International Standards that specify those protocols.

This International Standard

- a) specifies a PIXIT proforma;
- b) describes the relationship of the PICS to the test suite;
- c) describes the relationship of the PIXIT to the test suite;
- d) specifies a set of abstract tests using TTCN Graphical notation.

This part of ISO/IEC 8882 defines the testing of a DTE operating at the packet layer designed to access a public or private packet-switched network conforming to CCITT Recommendation X.25 (1980, 1984) or another DTE conforming to ISO 8208. The specification of test cases in executable/machine processable TTCN is outside the scope of this part of ISO/IEC 8882.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO/IEC 8882. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part

of ISO/IEC 8882 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 7498 : 1984, *Information processing systems — Open Systems Interconnection — Basic Reference Model.*

ISO 7776 : 1986, *Information processing systems — Data communications — High-level data link control procedures — Description of the X.25 LAPB-compatible DTE data link procedures.*

ISO/IEC 8208 : 1990, *Information technology — Data communications — X.25 Packet layer Protocol for Data Terminal Equipment.*

ISO/IEC 8208/Amd. 3 : 1991, *Information technology — Data communications — X.25 Packet Layer Protocol for Data Terminal Equipment Addendum 3: Conformance requirements.*

ISO/IEC 8882-1 : -¹⁾, *Information technology — Telecommunications and information exchange between systems — X.25 DTE conformance testing Part 1: General principles.*

ISO/IEC 9646-1 : 1991¹⁾, *Information technology — Open Systems Interconnection — Conformance testing methodology and framework — Part 1: General concepts.*

1) To be published.

ISO/IEC 9646-2 : 1991 ¹⁾, *Information technology — Open Systems Interconnection — Conformance testing methodology and framework — Part 2: Abstract test suite specification.*

ISO/IEC DIS 9646-3 : 1991 ¹⁾, *Information technology — Open Systems Interconnection — Conformance testing methodology and framework — Part 3: Tree and tabular combined notation.*

ISO/IEC 9646-4 : 1991 ¹⁾, *Information technology — Open Systems Interconnection — Conformance testing methodology and framework — Part 4: Test realization.*

ISO/IEC 9646-5 : 1991 ¹⁾, *Information technology — Open Systems Interconnection — Conformance testing methodology and framework — Part 5: Requirements on test laboratories and clients for the conformance assessment process.*

CCITT Recommendation X.25 (1980), *Interface between Data Terminal Equipment (DTE) and Data Circuit-Terminating Equipment (DCE) for Terminals Operating in the Packet Mode on Public Data Networks.*

CCITT Recommendation X.25 (1984), *Interface between Data Terminal Equipment (DTE) and Data Circuit-Terminating Equipment (DCE) for Terminals Operating in the Packet Mode and Connected to Public Data Networks by Dedicated Circuit.*

3 Definitions

3.1 Reference model definitions

This part of ISO/IEC 8882 makes use of the following term defined in ISO 7498.

(N)-protocol-data-unit (N-PDU)

3.2 Conformance testing definitions

This part of ISO/IEC 8882 makes use of the following terms defined in ISO/IEC 9646.

- a) Abstract Test Suite
- b) Conforming System or Implementation
- c) Conformance Test Suite

- d) Conformance Testing
- e) Executable Test Suite
- f) Postamble.
- g) Preamble
- h) Protocol Implementation Conformance Statement
- i) Protocol Implementation eXtra Information for Testing
- j) Test Group
- k) Test Step
- l) Test Suite

3.3 X.25-DTE conformance testing definitions

This part of ISO/IEC 8882 makes use of the following terms defined in ISO/IEC 8882-1.

- a) Improper PDU
- b) Inopportune PDU
- c) Proper PDU
- d) Test Subgroup
- e) Test Selection
- f) Tester
- g) Transient States.

3.4 Additional definitions

For the purposes of this part of ISO/IEC 8882, the following definitions apply.

3.4.1 proper packet

A packet that is a proper PDU.

3.4.2 improper packet

A packet that is an improper PDU.

3.4.3 inopportune packet

A packet that is an inopportune PDU.

4 Abbreviations

The following abbreviations are used in this part of ISO/IEC 8882:

- ADX Address
- ATS Abstract Test Suite
- ETS Executable Test Suite
- FAC Facility
- IUT Implementation Under Test
- LCI Logical Channel Identifier
- LEN Length
- PCO Point of Control and Observation
- PDU Protocol Data Unit
- PICS Protocol Implementation Conformance Statement

PIXIT Protocol Implementation eXtra Information for Testing

- PKT Packet
- PLG Packet Layer Group
- RX Receive
- TST Tester
- TX Transmit
- UDF User Data Field

5 Conformance

The test realizer shall comply with the requirements of ISO/IEC 9646-4. In particular, these concern the realization of an ETS based on the ATS. Test laboratories running conformance test services for this abstract test suite shall comply with ISO/IEC 9646-5.

6 Test suite information

6.1 Packet layer test suite structure

The packet layer tests are grouped as shown in table 1.

Table 1 — Packet layer test groups

Packet layer test group #	Test groups	Packet layer test group #	Test groups
1	r1 - Packet Layer Ready State	16	j1 - DXE Interrupt Ready State
2	r2 - DTE Restart Request State	17	j2 - DXE Interrupt Sent State
3	r3 - DXE Restart Indication State	18	f1 - DXE Receive Ready State
4	p1 - Ready State	19	f2 - DXE Receive Not Ready State
5	p2 - DTE Call Request State	20	g1 - DTE Receive Ready State
6	p3 - DXE Incoming Call State	21	g2 - DTE Receive Not Ready State ²
7	p4 - Data Transfer State	22	Data Transfer
8	p5 - Call Collision State	23	Timer Tests
9	p6 - DTE Clear Request State	24	Address
10	p7 - DXE Clear Indication State	25	Facility
11	d1 - Flow Control Ready State	26	Registration
12	d2 - DTE Reset Request State	27	Multiple Logical Channel Assignment
13	d3 - DXE Reset Indication State	28	DTE/DTE Tests
14	i1 - DTE Interrupt Ready State		
15	i2 - DTE Interrupt Sent State		

2) This group has been deleted but the number has been retained for consistency.

For each test group that tests a packet layer state (PLG1 through PLG28), the test cases specified are categorized into the following three subgroups.

- Subgroup 1 contains test cases in which the Tester transmits a **proper** test packet, these test cases are identified with a one hundred series test case identifier xx_1xx.
- Subgroup 2 contains test cases in which the Tester transmits an **improper** test packet, these test cases are identified with a two hundred series test case identifier xx_2xx.
- Subgroup 3 contains test cases in which the Tester transmits an **inopportune** test packet, these test cases are identified with a three hundred series test case identifier xx_3xx.

6.2 Packet layer initialization

In accordance with ISO 8208, 3.10, the DTE must transmit a Restart Request whenever link layer initialization has completed. However, DTEs developed in conformance with the 1980 and 1984 versions of Recommendation X.25 are not required to send a Restart Request at this time. To accommodate both DTE implementations, the Tester initiates the restart

procedure upon completion of link layer initialization.

The Tester will accept either a Restart Confirmation or a Restart Request as a valid response to its Restart Indication, as shown below in example EG_001. Packet layer initialization always occurs once at the start of a test session. State initialization, on the other hand, is performed many times during a test session as part of each test case. Packet layer initialization will also occur as part of state initialization when the previously executed test case results in a Fail or Inconclusive verdict, or the previously executed test case is part of PLG 1, 2, 3, 26 or in test groups in which the Restart procedure is executed as part of state initialization (PLG 1, 2, 3 and 26).

The following are examples of initialization of ISO 8208 over ISO 7776 (LAPB). Any other examples of initialization sequences using other underlying protocols are not shown, but may be appropriate. For example, normal state initialization steps in state r1 (PLG 1) are as shown in figure 1.

For those DTEs which disconnect the link upon receipt of a Restart Indication (or transmittal of a Restart Request) the state initialization steps include link layer initialization as shown in figure 2.

Figure 1

Test Case Dynamic Behaviour				
Reference: Example Test Step / Packet Layer Initialization				
Identifier: EG_001				
Objective: An example test step illustrating Packet Layer Initialization				
Default Reference:				
Behaviour Description	Label	Constraints Reference	V	Comments
EG_001 !RESTART START TD ?RESTART CANCEL TD ?RESTART CANCEL TD ?TIMEOUT TD ?OTHERWISE CANCEL TD		STRT_DCE STRTC STRT_DTEA	F F	1 TD expired
Extended Comments: 1) the Restart is sent upon successful initialization of the Data Link Layer				

Figure 2

Test Case Dynamic Behaviour				
Reference: Example Test Step / Packet Layer Initialization / Link Layer Initialization Identifier: EG_002 Objective: An example test step illustrating Packet Layer Initialization that includes Data Link Layer Initialization Default Reference:				
Behaviour Description	Label	Constraints Reference	V	Comments
EG_002 [L,D] L!RESTART START TD L?RESTARTC START TD D?DISC CANCEL TD +LINK_INIT L?TIMEOUT TD L?RESTART START TD D?DISC CANCEL TD +LINK_INIT L?TIMEOUT TD L?TIMEOUT TD L?OTHERWISE CANCEL TD LINK_INIT D!UA D?SABM D!UA L!RESTART START TD L?RESTARTC CANCEL TD L?RESTART CANCEL TD L?TIMEOUT TD L?OTHERWISE CANCEL TD		STRT_DCE STRTC DISC_1 STRT_DTEA DISC_1 UA_DCE SABM_1 UA_DCE STRT_DCE STRTC STRT_DTEA	F F F F F F	wait for disc TD expired TD expired send UA wait for SABM send UA
Extended Comments: L is the PCO at the Tester (Packet Layer) to Link Layer interface. D is the PCO at the Link Layer to Physical interface. This example uses the Multi-layer testing method, the Packet Layer Test Suite only uses the Remote Single-layer testing method.				

6.3 DTE-initiated actions

DTE-initiated actions specified by the test suite are handled using the Implicit Send mechanism defined in ISO/IEC 9646-3. The ability of the IUT to perform these actions, and its ability to execute the tests containing the actions, is determined by the information provided in the PIXIT and the PICS.

6.4 Timer definitions

This part of ISO/IEC 8882 defines the following timers:

- TR - the time required by the IUT to resume testing after completion of the Restart procedure. The duration is provided in PIXIT question 1.18a and contained in the test suite parameter TR_DELAY;
- TC - the time required by the IUT to resume testing after completion of the Clear procedure. The duration is provided in PIXIT question 1.18b and contained in the test suite parameter TC_DELAY;
- TS - the time required by the IUT to resume testing after completion of the Reset procedure. The duration is provided in PIXIT question 1.18c and contained in the test suite parameter TS_DELAY;
- TD - the time that the Tester waits before determining that the IUT will not respond to a Tester stimulus. For example, how long the Tester should wait before assuming that the IUT has either discarded or failed to respond to the stimulus. TD must be less than all other timers specific to ISO 8208, i.e. T20 through T28. The duration is calculated by the formula contained in the PIXIT question 1.23 ($TD = 2 * TD_RESPONSE + MAX(TO_R3, TO_P3, TO_P7, TO_D3, TO_J2)$) and contained in the test suite parameter TD_WAIT_TIME.
- TD_RESP - is the maximum time that the tester should wait for an immediate response from the IUT to a tester stimulus. The duration is provided in PIXIT question 1.20 and contained in TD_RESPONSE;
- TDEL - is a tolerance used in testing timers T20 - T28 of the base standard. The duration is provided in PIXIT question 1.21 and contained in the test suite parameter TDELTA. The duration

considers the round trip transit delay between the Tester and IUT, and the time necessary for an IUT to respond to a received packet or timer expiry;

TO_R3 - is the minimum time that the IUT remains in state R3. The duration is provided in PIXIT question 1.22 and contained in TO_DELAY_R3_MIN;

TO_P3 - is the minimum time that the IUT remains in state P3. The duration is provided in PIXIT question 1.22 and contained in TO_DELAY_P3_MIN;

TO_P7 - is the minimum time that the IUT remains in state P7. The duration is provided in PIXIT question 1.22 and contained in TO_DELAY_P7_MIN;

TO_D3 - is the minimum time that the IUT remains in state D3. The duration is provided in PIXIT question 1.22 and contained in TO_DELAY_D3_MIN;

TO_J2 - is the minimum time that the IUT remains in state J2. The duration is provided in PIXIT question 1.22 and contained in TO_DELAY_J2_MIN.

6.5 Cause codes and diagnostic codes

ISO 8208 requires the cause code to be 0 or 128 and the diagnostic code to be present in the Restart, Clear or Reset packet. Use of cause code 0 designates the use of standard diagnostic codes as specified in ISO 8208, figure 14-B. Use of cause code 128 designates the use of DTE-specific diagnostic codes.

CCITT X.25 (1984) requires the cause code in the Restart, Clear, or Reset Request packets to be either 0 or a value in the range of 128 through 255. The diagnostic code field is not mandatory in the basic format of these request packets. However, when the extended format is used, the diagnostic code field shall be present.

CCITT X.25 (1980) requires the cause code field in the Restart, Clear, or Reset Request packet to be set to 0. The diagnostic code field is not mandatory in the request packets.

Any one of several diagnostic codes may be generated by the IUT, on a per test case basis, especially where multiple error conditions are present in the same packet.

In such instances any one of the possible diagnostic codes shall be accepted.

6.6 Data transfer states

A limited set of data transfer tests (PLG20 and PLG22) are included in this test suite to verify the IUT's ability to perform the following:

- send and/or receive valid data packets;
- manage window rotation;
- detect improper data packets, and react accordingly;
- observe the remote busy condition.

In order to facilitate the exchange of data packets during these tests, the IUT provider shall specify the contents of the data packet user data field (UDF) for the Tester. The UDF values are supplied by the IUT provider in the PIXIT.

The following items should be considered when completing the PIXIT:

- a) The UDF content in data packets received by the Tester will not be verified. Consequently, the information is not requested in the PIXIT.

NOTE — Receive-only IUTs are not expected to send data packets during data transfer tests.

- b) The start of data transfer (i.e. Tester or IUT transmits first) is based on the response in the PIXIT.
- c) Depending on the test being performed, the full list of UDFs specified in the PIXIT may not be sent. Exchange of data packets containing UDFs specified in the list may terminate at any point. Subsequent tests will start with the entry in the UDF list that is specified in the PIXIT (i.e. first entry or next entry).
- d) If UDF contents are specified in the PIXIT, they will be sent (in sequence) whenever a data packet must be sent, or in response to data packets received from the IUT.

NOTE — Q-bit, D-bit and M-bit settings in these data packets are based on information provided in the PIXIT. Receive Ready (RR) packets may also be sent by the Tester and the IUT.

- e) It is also assumed that the IUT can send consecutive

data packets as required for window rotation tests. The Tester will only send Receive Ready (RR) packets during these tests.

6.7 Other user data fields

When necessary, the content of user data fields in the Call setup, Clearing and Interrupt packets shall be provided to the Tester by the IUT provider in order to successfully execute the Packet Layer Test Suite. In this case, the IUT requires the Tester to transmit user data fields in accordance with higher layer protocols which are operating above the packet layer.

6.8 Transient states

It is recognized that for those DTEs that process packets sequentially, certain states are not observable. Specifically, the testing of the DTE during the DXE defined states (for example, r3 - RESTART INDICATION, p3 - INCOMING CALL, p7 - CLEAR INDICATION, and d3 - RESET INDICATION) may end up in the testing of some other states (p1 - Packet Layer Ready, p4 - Data Transfer, d1 - Flow Control Ready). For example, to test the response to an error (r3) state, the Tester would send a RESTART INDICATION, immediately followed by the error packet. The Tester is expecting the DTE to discard the error packet, then send a RESTART REQUEST in response. However, the DTE generally responds immediately to the RESTART INDICATION with a RESTART CONFIRMATION and processes the next packet from the packet layer state r1. This test suite contains tests for these transient states only if they are observable. They are observable and testable if the minimum duration of the state is at least twice TD_RESPONSE.

6.9 Relationship of PICS to test suite

The Protocol Implementation Conformance Statement (PICS) defines the capabilities and options which have been implemented by the IUT, and also any features not implemented. The PICS shall be provided by the IUT, and its function is to ensure that the IUT implementation will be tested for conformance against only relevant requirements. The PICS proforma is defined in ISO/IEC 8208/Amd. 3. Table 5 maps the PICS items to the test cases which they affect.

6.10 Relationship of PIXIT to test suite

The PIXIT consists of a list of questions developed to obtain the characteristics of the IUT which are necessary to successfully execute the conformance test suite. Table

6 describes the relationship of the PIXIT to the test suite. The table lists the question numbers specified in the PIXIT, and maps them to the test cases which they affect.

6.11 PIXIT proforma

Information supplied by the IUT provider in table 2 will be used to configure the Tester to execute the conformance test suite. Questions pertaining to function(s) not supported by the IUT should be ignored, since tests requiring the information will be eliminated from the conformance test suite by the PICS. It may be necessary to complete more than one PIXIT in order to represent the various configuration options of a specific IUT.

An uppercase mnemonic enclosed in parenthesis i.e. (IUT_TX) indicates the Test Suite Parameter that maps to this PIXIT question. Values supplied in the PIXIT will be directly mapped into the Test Suite via their associated Test Suite Parameter, therefore all supplied values must be in valid TTCN notation. A field that may contain any valid value based on the protocol specification is indicated by use of a ? in the PIXIT answer. A field which may or may not be present is indicated by an * and a field which is never present is indicated by a - . Refer to the Test Suite Parameter table for the declared type (INTEGER, BITSTRING, HEXSTRING) of each test suite parameter.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

PIXIT PROFORMA

Table 2 — PIXIT PROFORMA

General Information

IUT Type

1.1 Indicate the protocol to be tested, select only one of the following;

- | | | | |
|----|-----------------|------------|----------|
| a) | ISO 8208 | (ISO) | yes / no |
| b) | CCITT X.25 1984 | (CCITT_84) | yes / no |
| c) | CCITT X.25 1980 | (CCITT_80) | yes / no |

1.2 State whether the IUT is capable of sending data and/or receiving data.

- | | | | |
|----|-----------|----------|----------|
| a) | sending | (IUT_TX) | yes / no |
| b) | receiving | (IUT_RX) | yes / no |

Logical Channel Configuration

1.3 Range of PVC Logical Channel Identifier(s) (must be less than or equal to PICS item LC7)

(LPV) _____ to (HPV) _____

1.4 Range of SVC Logical Channel Identifier(s) (must be within the ranges specified in the PICS items LC1 through LC6)

- | | | | | |
|----|------------------|-------------|----------------|--------|
| a) | One-way incoming | (LIC) _____ | to (HIC) _____ | Note 1 |
| b) | One-way outgoing | (LOC) _____ | to (HOC) _____ | Note 1 |
| c) | Two-way | (LTC) _____ | to (HTC) _____ | Note 1 |

1.5 Indicate a logical channel to be used by the Tester for Incoming Calls (to the IUT) or PVCs.

(LCI_UNDER_TEST) _____

Note 9

1.6 Indicate a logical channel to be used for logical channel unassigned testing.

(LUC) _____

1.7 How many Incoming virtual calls can be supported at the same time using the information in PIXIT question 1.4 and PIXIT question 2.2a ?

(SIM_CALL_IN) _____

1.8 How many Outgoing virtual calls can be supported at the same time using the information in PIXIT question 1.4 and PIXIT question 2.3a ?

(SIM_CALL_OUT) _____

PIXIT PROFORMA

Flow Control Information

1.9 Window sizes

- a) Indicate the default window size to be used during test execution. This value is used for both transmit and receive windows (shall be in range of PICS items V2s and V2r).

(DEF_WIN_SZ) _____

- b) Indicate a nonstandard default window size to be used during test execution. This value is used for both transmit and receive windows.

(NS_DEF_WIN_SZ) _____

NOTE — the NS_DEF_WIN_SZ is a string of four hexadecimal digits representing the two octet facility parameter field for both the transmit and receive nonstandard default window sizes.

- c) Provide the integer value of the nonstandard default window size given in 1.9b above.

(NS_DEF_WIN_SZ_NUM) _____

1.10 Packet sizes

Indicate a nonstandard default packet size to be used during test execution. This value is used for both transmit and receive packet sizes.

(NS_DEF_PKT_SZ) _____

NOTE — the NS_DEF_PKT_SZ is a string of four hexadecimal digits representing the two octet facility parameter field for both the transmit and receive nonstandard default packet sizes.

- 1.11 Indicate maximum flow control packet size. (MAX_PKT_SZ) _____

- 1.12 Indicate the modulo to be used for testing. (SEQ_MODULO) 8 / 128 _____

PIXIT PROFORMA

IUT Behaviour

1.13 Does the IUT re-initialize at the Data Link Layer upon execution of an unexpected Restart procedure ?

(DISC_AT_DL) yes / no

1.14 Does the IUT require a one for one exchange of Data packets when transmitting a window or more of data?

(REPLY_REQUIRED) yes / no

1.15 Will the IUT send the first data packet?

(FIRST_DATA_FROM_IUT) yes / no

1.16 Will the IUT send more data packets than its send window size? yes / no

1.17 Will the IUT send at least three data packets more than its modulo size? yes / no

Timers

1.18 State the time required by the IUT to resume testing after completion of the following procedures:

- a) Restart (TR_DELAY) _____ Note 3
- b) Clear (TC_DELAY) _____ Note 3
- c) Reset (TS_DELAY) _____ Note 3

1.19 Enter the values used by the IUT for the following timers:

- a) (T20) _____ Note 3
- b) (T21) _____ Note 3
- c) (T22) _____ Note 3
- d) (T23) _____ Note 3
- e) (T24) _____ Note 3
- f) (T25) _____ Note 3
- g) (T26) _____ Note 3
- h) (T27) _____ Note 3

PIXIT PROFORMA

i) (T28) _____ Note 3

1.20 State the maximum time the tester should wait for an immediate response from the IUT to a tester stimulus, see clause 6.4.

(TD_RESPONSE) _____ Note 3

1.21 State the delta value to be added to timers used by the Tester, see clause 6.4.

(TDELTA) _____ Note 3

1.22 For R3, P3, D3, P7, J2 give the minimum and maximum time that the IUT remains in these states.

a) R3 (TO_DELAY_R3_MIN) _____ Note 3, 7
 (TO_DELAY_R3_MAX) _____

b) P3 (TO_DELAY_P3_MIN) _____ Note 3, 7
 (TO_DELAY_P3_MAX) _____

c) D3 (TO_DELAY_D3_MIN) _____ Note 3, 7
 (TO_DELAY_D3_MAX) _____

d) P7 (TO_DELAY_P7_MIN) _____ Note 3, 7
 (TO_DELAY_P7_MAX) _____

e) J2 (TO_DELAY_J2_MIN) _____ Note 3, 7
 (TO_DELAY_J2_MAX) _____

1.23 The time that the tester will use in most test cases when waiting for a response from the IUT will be a function of the following formula and assigned to the timer type TD.

$$(TD_WAIT_TIME) = 2 * TD_REPNSE + \text{the maximum value of } (TO_DELAY_R3_MAX, TO_DELAY_P3_MAX, TO_DELAY_D3_MAX, TO_DELAY_P7_MAX, TO_DELAY_J2_MAX)$$

PIXIT PROFORMA

Packet Specific Information

Call Setup Information

- 2.1 a) Is the Calling DTE address in an Incoming Call packet verified? yes / no
- b) If yes, indicate an unacceptable address and address length which can be sent by the Tester.

(TST_ADDR_INV) _____

(TST_ADDR_INVL) _____

- c) Is the Called DTE address in an Incoming Call packet verified? yes / no
- d) If yes, indicate an unacceptable address and address length which can be sent by the Tester.

(IUT_ADDR_INV) _____

(IUT_ADDR_INVL) _____

- 2.2 For each of the following packets indicate the value of the field and its length expected by the IUT.

	<u>Calling Address</u>	<u>Called Address</u>
a) Incoming Call		
	(TST_ADDR1) _____	(IUT_ADDR1) _____
	(TST_ADDR1_L) _____	(IUT_ADDR1_L) _____
b) Call Connected		
	(TST_ADDR2) _____	(IUT_ADDR2) _____ Note 4
	(TST_ADDR2_L) _____	(IUT_ADDR2_L) _____

PIXIT PROFORMA

2.3 For each of the following packets indicate the value of the field transmitted by the IUT.

	<u>Calling Address</u>	<u>Called Address</u>
a) Call Request		
	(IUT_ADDR5) _____	(TST_ADDR5) _____
	(IUT_ADDR5_L) _____	(TST_ADDR5_L) _____

b) Call Accepted			
	(IUT_ADDR6) _____	(TST_ADDR6) _____	Note 4
	(IUT_ADDR6_L) _____	(TST_ADDR6_L) _____	

2.4 Specify a maximum length address supported by the IUT.

(IUT_ADDR_MAX)	_____
(IUT_ADDR_MAXL)	_____

2.5 Indicate the addresses and facilities and lengths to be used in the CCITT - Specified DTE facility for called and calling address extension.

a) the address and length for the Address Field contained in the Incoming Call packet only;

	Calling Address	Called Address
(TST_AF)	_____	(IUT_AF) _____
(TST_AF_L)	_____	(IUT_AF_L) _____

b) the facility length and contents of the Address Extension Facility Parameter, including the use of address extension octet contained in the Incoming Call packet only;

(F_NONX25)	_____
(F_NONX25_L)	_____

NOTE — the F_NONX25 string of facilities includes; facility marker '000F'H, facility code 'CB'H, calling address length, calling address, facility code 'C9'H, called address length, and called address.

PIXIT PROFORMA

- c) the facility length and contents of the Address Extension Facility Parameter, including the use of address extension octet, contained in the Call Accept packet used in response to the Incoming Call packet;

(F_AE) _____

(F_AE_L) _____

NOTE — the F_AE string of facilities includes; facility marker '000F'H, facility code 'C9'H, called address length, called address.

Facilities

- 2.6 a) Is the fast select facility always used? (FAST_SELECT) yes / no

If yes, the fast select facility must be included in the answers to question 2.7.

- b) Does the IUT require more than one facility to be present in an Incoming Call packet?

yes / no Note 8

- c) Does the IUT transmit more than one facility in a Call Request packet?

yes / no Note 8

- d) Provide a string of 110 octets of facility information to be sent to the IUT.

(FACS_110) _____ Note 10

- 2.7 Provide the facilities, facility length and user data to be used in each of the following packets.

- a) Incoming Call packet received by the IUT

(CALL_IND_F) _____ Note 10

(CALL_IND_FL) _____

(CALL_IND_UD) _____

- b) Call Request packet transmitted by the IUT

(CALL_REQ_F) _____ Note 10

PIXIT PROFORMA

- (CALL_REQ_FL) _____
(CALL_REQ_UD) _____
- c) Call Connected packet received by the IUT

(CALL_CON_F) _____ Note 10
(CALL_CON_FL) _____
(CALL_CON_UD) _____
- d) Call Accept packet transmitted by the IUT

(CALL_ACC_F) _____ Note 10
(CALL_ACC_FL) _____
(CALL_ACC_UD) _____
- e) Clear Indication packet received by the IUT

(CLR_IND_F) _____ Note 10
(CLR_IND_FL) _____
(CLR_IND_UD) _____
- f) Clear Request packet transmitted by the IUT

(CLR_REQ_F) _____ Note 10
(CLR_REQ_FL) _____
(CLR_REQ_UD) _____
- g) Clear Confirmation packet received by the IUT

(CLC_RX_F) _____ Note 10
(CLC_RX_FL) _____
- h) Clear Confirmation packet transmitted by the IUT

(CLC_TX_F) _____ Note 10
(CLC_TX_FL) _____

- 2.8 a) Provide a number to be used for Basic CUG? (BCUG_NUM) _____
- b) Provide a number to be used for extended CUG? (ECUG_NUM) _____
- c) Provide a number to be used for bilateral CUG? (BICUG_NUM) _____

PIXIT PROFORMA

2.9 Indicate the default throughput class. (DEF_THRUPT) _____

2.10 Indicate a throughput class that is different from the default throughput class.

(THRUPT) _____

2.11 Indicate the Transit Delay value to be used.

(TRNS_DELAY_1) first octet _____

(TRNS_DELAY_2) second octet _____

2.12 Provide the Network User Identification facility length and facilities.

(F_NUI) _____

(F_NUI_L) _____

Data Packet Information

2.13 Specify the Q, D-bit, and M-Bit settings and data contents of the first nine data packets which the IUT will received (default settings for Q,D and M-bits are 0, a ? in the entry indicates that any user data is acceptable). If possible at least one data packet should contain the full size of data.

(UD_0) Q= , D= , M= _____

(UD_1) Q= , D= , M= _____

(UD_2) Q= , D= , M= _____

(UD_3) Q= , D= , M= _____


(UD_4) Q= , D= , M= _____

(UD_5) Q= , D= , M= _____

(UD_6) Q= , D= , M= _____

(UD_7) Q= , D= , M= _____

(UD_8) Q= , D= , M= _____

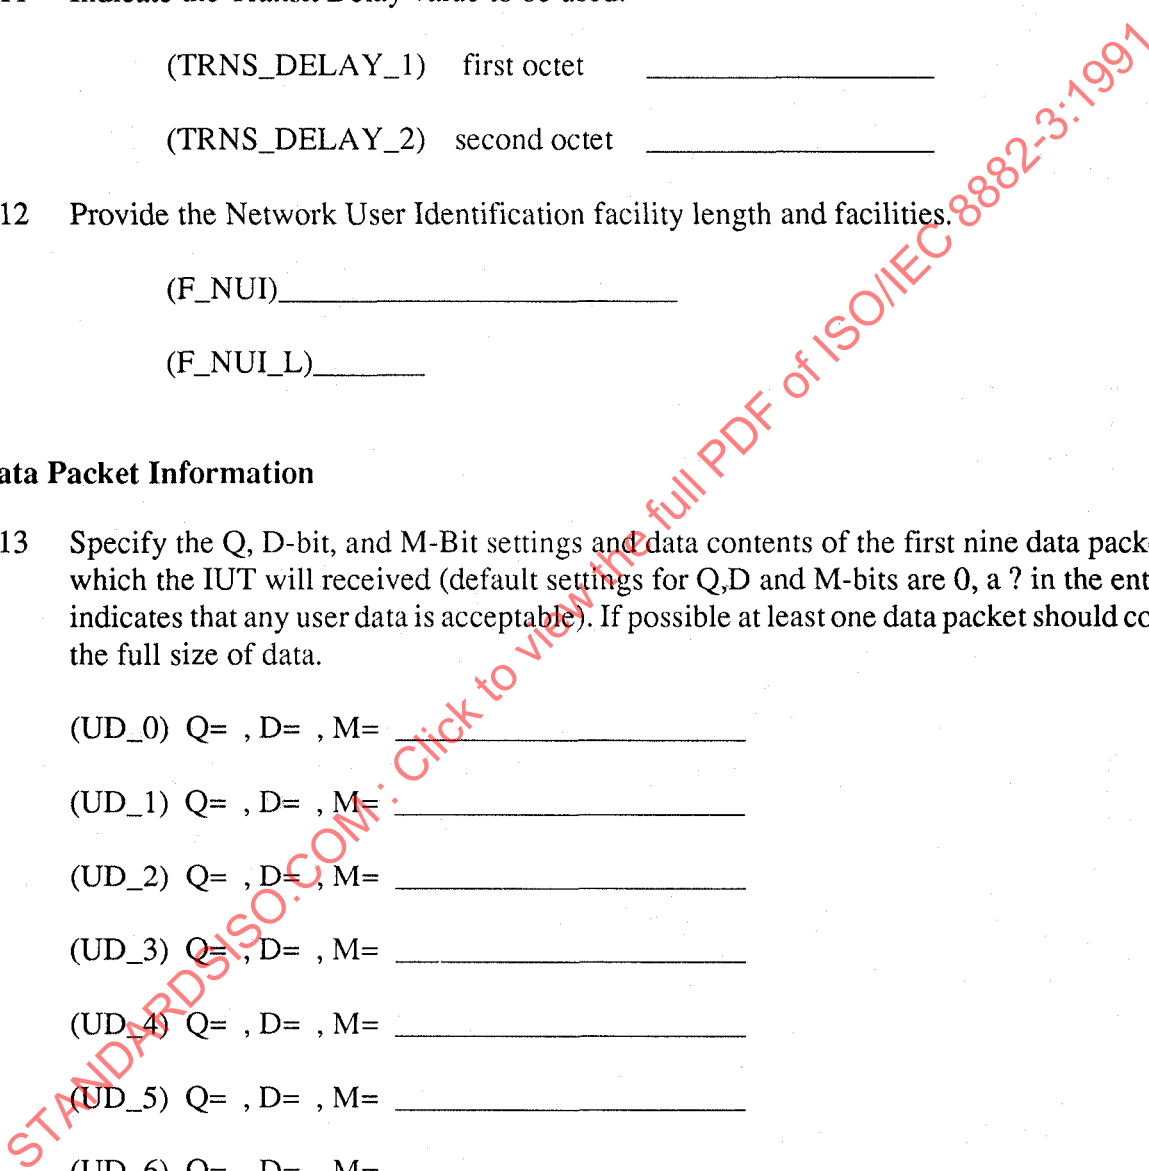

PIXIT PROFORMA

Note 5

(UD_U) Q= , D= , M= _____

- 2.14 Specify a sequence of Data packets no greater than nine that contains a change of Q-bit value, where the change generates an error when received by the IUT, and data content that can be received by the IUT (default settings for D and M-bits is 0, a ? in the entry indicates that any user data is acceptable).

(UDQ0) Q= , D= , M= _____

(UDQ1) Q= , D= , M= _____

(UDQ2) Q= , D= , M= _____

(UDQ3) Q= , D= , M= _____

(UDQ4) Q= , D= , M= _____

(UDQ5) Q= , D= , M= _____

(UDQ6) Q= , D= , M= _____

(UDQ7) Q= , D= , M= _____

(UDQ8) Q= , D= , M= _____

- 2.15 Specify a sequence of Data packets no greater than nine that contains a change of Q-bit value, where the change is acceptable to the IUT, and data content that can be received by the IUT (default settings for D and M-bits is 0, a ? in the entry indicates that any user data is acceptable).

(UDQ0A) Q= , D= , M= _____

(UDQ1A) Q= , D= , M= _____

(UDQ2A) Q= , D= , M= _____

(UDQ3A) Q= , D= , M= _____

(UDQ4A) Q= , D= , M= _____

(UDQ5A) Q= , D= , M= _____

(UDQ6A) Q= , D= , M= _____

PIXIT PROFORMA

(UDQ7A) Q= , D= , M= _____

(UDQ8A) Q= , D= , M= _____

2.16 Specify a sequence of Data packets no greater than nine after which a packet with an empty data field may be processed by the IUT (default settings for Q, D and M-bits are 0, a ? in the entry indicates that any user data is acceptable).

(UDE0) Q= , D= , M= _____

(UDE1) Q= , D= , M= _____

(UDE2) Q= , D= , M= _____

(UDE3) Q= , D= , M= _____

(UDE4) Q= , D= , M= _____

(UDE5) Q= , D= , M= _____

(UDE6) Q= , D= , M= _____

(UDE7) Q= , D= , M= _____

(UDE8) Q= , D= , M= _____

2.17 Specify a sequence of Data packets no greater than nine that contains a change of M-bit value and data content that can be received by the IUT (default settings for D and Q-bits are 0, a ? in the entry indicates that any user data is acceptable).

(UDM0) Q= , D= , M= _____

(UDM1) Q= , D= , M= _____

(UDM2) Q= , D= , M= _____

(UDM3) Q= , D= , M= _____

(UDM4) Q= , D= , M= _____

(UDM5) Q= , D= , M= _____

(UDM6) Q= , D= , M= _____

(UDM7) Q= , D= , M= _____

STANDARDSISO.COM · Click to view the full PDF of ISO/IEC 8882-3:1991

PIXIT PROFORMA

(UDM8) Q= ,D= ,M= _____

2.18 Specify a partially full data packet with M-bit set which would otherwise (M-bit = 0) be acceptable to the IUT.

(UDMP) Q= ,D= ,M= _____

2.19 Specify the user data to be carried where the Tester is required to send a specific number of data octets in order to test the IUT (a ? in the entry indicates that any user data is acceptable).

(UD1) 1 octet _____

(UD3) 3 octets _____

(UD16)16 octets _____

(UD17)17 octets _____

(UD32)32 octets _____

(UD110)110 octets _____

(UD128)128 octets _____

(UD129)129 octets _____

(UDNS) _____

Note 6

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

PIXIT PROFORMA

Miscellaneous Information

2.20 Provide Interrupt User Data (one octet for X.25 1980 and upto 32 octets for X.25 1984 and ISO 8208) to be carried in Interrupt packets:

a) IUT transmits (Tester receives)

(UD_I_IUT) _____

b) IUT receives (Tester transmits)

(UD_I_TST) _____

2.21 Registration Request/Confirmation Packets

Note 8

2.22 Implicit Sends

Indicate whether the IUT can or cannot support on demand the following Implicit Sends used in this Test Suite.

- | | | | |
|----|----------------|-----------------|----------|
| a) | <IUT!CALL> | Call Request | yes / no |
| b) | <IUT!DATA> | Data | yes / no |
| c) | <IUT!INT> | Interrupt | yes / no |
| d) | <IUT!RESTARTC> | Restart Confirm | yes / no |
| e) | <IUT!RESTART> | Restart | yes / no |
| f) | <IUT!REG> | Registration | yes / no |

PIXIT PROFORMA

NOTES

1. Specify a logical channel combination which will permit both Incoming Call and Call Request functions to be tested (preferably one two-way VC), if applicable.
2. Value should be indicated in hexadecimal.
3. All times are to be given in seconds.
4. The IUT will indicate here whether it accepts that the contents of this field could be different from what was expected, as a consequence of the use of the CLAMN facility.
5. UD_U is a universally repeatable data packet and will be used in test cases where more than nine data packets are required to be transmitted by the Tester (see test case P22_105 as an example).
6. A packet containing the number of octets equal to that of the Nonstandard Default packet size, see PIXIT 1.10.
7. When TO_DELAY_xx_MIN is not greater than or equal to twice the value of TD_RESPONSE (PIXIT 1.20) the applicable transient state is not testable.
8. All tests for facilities contained in PLG 25 and PLG 26 test for each facility independently where other facilities are not present. If a combination of facilities is required by the IUT the facility test cases for those facilities will be de-selected from PLG 25 and PLG 26.
9. If a value is not provided a logical channel will be assigned by selecting the lowest channel in the first available logical channel group chosen in the following order, Incoming, Twoway, PVC.
10. The facility information provided must be syntactically correct and acceptable to the IUT. Facilities may be repeated to achieve the required length.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

6.12 Acceptable unexpected responses

In some test cases, particularly in the data transfer state (p4/d1), unexpected packets may be received from the IUT which do not affect the outcome of the test case. Such unexpected packets shall be accepted by the test system without consequence to the IUT.

Table 3 identifies those packets which the test system shall accept depending on the state of the interfaces as perceived by the IUT. Note that RESTART REQUEST, CLEAR REQUEST, and RESET REQUEST, which may be sent at any time by the IUT are not considered to be allowable unexpected responses during data transfer tests. Also note that when the IUT is in state P1, where a Call Request may be sent at anytime, an unsolicited Call Request is not considered to be an acceptable unexpected response. This is because it is highly unlikely, for reasons of timing, that the unsolicited Call Request would arrive at a time when the tester would consider it as a correct response to a previously issued implicit send request (IUT!CALL), see ISO/IEC 9646-5. Similarly, a REJECT packet requesting packet retransmission is not accepted as an allowable unexpected response.

The logical channel under test is derived from the PIXIT. All packets received on logical channels other than the one being tested shall be discarded by the tester regardless of their syntactic validity. This does not apply to packets received on logical channel 0.

In a DTE/DTE environment where the IUT is acting as a DCE, diagnostic packets received by the Tester on logical channel 0 indicating timer timeouts shall be ignored.

6.13 Implicit send

The use of the Implicit Send mechanism may be realized through either manual operator intervention or automated procedures. PIXIT question 2.22 lists the Implicit Sends used in this test suite.

6.14 Basic interconnection tests

A set of Basic Interconnection Tests (BITs) may be used to determine the interoperability between the Test Laboratory and the Implementation Under Test prior to running the full test suite, reference ISO/IEC 9646-1, 6.1.2. When these BITs are used they shall be selected from the following list, this selection is based on answers given in the PICS and PIXIT proformas and the corresponding entries in the PICS and PIXIT cross reference tables, see clause 8.

Table 3 — Acceptable unexpected responses

Packet received from the IUT (on LCN) under test	State of the interface as perceived by the IUT							
	d1	i1	i2	j1	j2	f1	f2	g1
DATA	x	x	x	x	x	x		x
INTERRUPT	x	x		x	x	x	x	x
RR	x	x	x	x	x	x	x	x
RNR	x	x	x	x	x	x	x	x

Table 4 — Basic interconnection tests

Test case identifier	Test purpose
P1_101	Verify the IUT accepts a Restart Indication in R1
P2_101	Verify the R2 to R1 transition via Restart Indication
P2_102	Verify the R2 to R1 transition via Restart Confirmation
P4_101	Verify the IUT accepts a valid Incoming Call received in state P1
P5_103	Verify the IUT accepts a Call Connected packet while in P2
P9_106	Verify the IUT accepts a valid Clear Confirmation received in state P6
P11_101	Verify the IUT accepts a Reset Indication received in state D1
P11_102	Verify the IUT can accept Data in state D1
P12_102	Verify the IUT is in state D1 after receiving a Reset Confirmation while in state D2

7 TTCN abstract test suite

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Suite Overview

Suite Name: PACKET
 Standards ref: ISO 8208, CCITT X.25 1980 and 1984, ISO/IEC 9646
 PICS proforma ref: ISO 8208/AD3
 PIXIT proforma ref: IS 8882-3 PIXIT Proforma
 PICS/PIXIT use: IS 8882-3 clause Use of PICS and PIXIT Cross Reference Table
 Test Method(s) : Remote Single Layer
 Comments:

Test Case Id.	Test Case Reference	Page	Description
P1_101	PACKET/R1/PROPER/P01	0095	Verify the IUT accepts a Restart Indication in R1
P1_102	PACKET/R1/PROPER/P02	0096	Verify the IUT does not respond to a Diagnostic packet received in state R1
P1_201A	PACKET/R1/IMPROPER/P01A	0097	Verify the IUT discards an Incoming Call packet with LCI=0 while in state R1
P1_201B	PACKET/R1/IMPROPER/P01B	0098	Verify the IUT discards a Call Connected packet with LCI=0 while in state R1
P1_201C	PACKET/R1/IMPROPER/P01C	0099	Verify the IUT discards a Clear Indication packet with LCI=0 while in state R1
P1_201D	PACKET/R1/IMPROPER/P01D	0100	Verify the IUT discards a Clear Confirmation packet with LCI equal to zero while in state R1
P1_201E	PACKET/R1/IMPROPER/P01E	0101	Verify the IUT discards a Data packet with LCI=0 while in state R1
P1_201F	PACKET/R1/IMPROPER/P01F	0102	Verify the IUT discards an Interrupt packet with LCI=0 while in state R1
P1_201G	PACKET/R1/IMPROPER/P01G	0103	Verify the IUT discards an Interrupt Confirmation packet with LCI=0 while in state R1
P1_201H	PACKET/R1/IMPROPER/P01H	0104	Verify the IUT discards an Receiver Ready (RR) packet with LCI=0 while in state R1
P1_201I	PACKET/R1/IMPROPER/P01I	0105	Verify the IUT discards an Receiver Not Ready (RNR) packet with LCI=0 while in state R1
P1_201J	PACKET/R1/IMPROPER/P01J	0106	Verify the IUT discards a Reset Indication packet with LCI=0 while in state R1

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
P1_201K #	PACKET/R1/IMPROPER/P01K	0107	Verify the IUT discards a Reset Confirmation packet with LCI=0 while in state R1
P1_201L #	PACKET/R1/IMPROPER/P01L	0108	Verify the IUT discards a Reject packet with LCI=0 while in state R1
P1_202 #	PACKET/R1/IMPROPER/P02	0108	Verify the IUT discards or Restarts a too short Restart Indication (no cause code or diagnostic fields) packet received in state R1
P1_203 #	PACKET/R1/IMPROPER/P03	0109	Verify the IUT discards or Restarts a too long Restart (one octet after the Diagnostic field) received in state R1
P1_204 #	PACKET/R1/IMPROPER/P04	0110	Verify the IUT discards or Restarts a too long Restart Confirmation (one octet appended to the end of the packet) received in state R1
P1_206 #	PACKET/R1/IMPROPER/P06	0111	Verify the IUT discards a Diagnostic packet with an assigned LCN not equal to zero received in state R1
P1_207 #	PACKET/R1/IMPROPER/P07	0112	Verify the IUT discards a too short Diagnostic packet (no diagnostic or explanation fields) received in state R1
P1_208 #	PACKET/R1/IMPROPER/P08	0112	Verify the IUT discards a too long Diagnostic packet (explanation field of three octets plus one appended octet) received in state R1
P1_209 #	PACKET/R1/IMPROPER/P09	0113	Verify the IUT discards packet of length one octet received in state R1
P1_210 #	PACKET/R1/IMPROPER/P10	0114	Verify the IUT discards Restart Indications with an invalid GFI received in state R1
P1_211A #	PACKET/R1/IMPROPER/P11A	0115	Verify the IUT discards a Incoming Call with unassigned LCI received in state R1
P1_211B #	PACKET/R1/IMPROPER/P11B	0116	Verify the IUT discards a Call Connected packet with unassigned LCI received in state R1
P1_211C #	PACKET/R1/IMPROPER/P11C	0116	Verify the IUT discards a Clear Indication with unassigned LCI received in state R1
P1_211D #	PACKET/R1/IMPROPER/P11D	0117	Verify the IUT discards a Clear Confirmation with unassigned LCI received in state R1
P1_211E #	PACKET/R1/IMPROPER/P11E	0117	Verify the IUT discards a Data packet with unassigned LCI

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
# P1_211F	PACKET/R1/IMPROPER/P11F	0118	received in state R1 Verify the IUT discards a Interrupt packet with unassigned LCI received in state R1
# P1_211G	PACKET/R1/IMPROPER/P11G	0118	Verify the IUT discards a Interrupt Confirmation with unassigned LCI received in state R1
# P1_211H	PACKET/R1/IMPROPER/P11H	0119	Verify the IUT discards a Receive Ready (RR) with unassigned LCI received in state R1
# P1_211I	PACKET/R1/IMPROPER/P11I	0119	Verify the IUT discards a Receive Not Ready (RNR) with unassigned LCI received in state R1
# P1_211J	PACKET/R1/IMPROPER/P11J	0120	Verify the IUT discards a Reset Indication with unassigned LCI received in state R1
# P1_211K	PACKET/R1/IMPROPER/P11K	0120	Verify the IUT discards a Reset Confirmation with unassigned LCI received in state R1
# P1_211L	PACKET/R1/IMPROPER/P11L	0121	Verify the IUT discards a Reject packet with unassigned LCI received in state R1
# P1_301	PACKET/R1/INOPPORTUNE/P01	0122	Verify the IUT restarts a Restart Confirmation with the correct diagnostic code received in state R1.
# P2_101	PACKET/R2/PROPER/P01	0124	Verify the R2 to R1 transition via Restart Indication
# P2_102	PACKET/R2/PROPER/P02	0124	Verify the R2 to R1 transition via Restart Confirmation
# P2_103	PACKET/R2/PROPER/P03	0125	Verify the IUT does not respond to a Diagnostic packet received in state R2
# P2_201	PACKET/R2/IMPROPER/P01	0125	Verify the IUT discards a packet of length two octets received in state R2
# P2_202A	PACKET/R2/IMPROPER/P02A	0126	Verify the IUT discards an Incoming Call with LCI=0 received in state R2
# P2_202B	PACKET/R2/IMPROPER/P02B	0126	Verify the IUT discards a Call Connected packet with LCI=0 received in state R2
# P2_202C	PACKET/R2/IMPROPER/P02C	0127	Verify the IUT discards a Clear Indication with LCI=0 received in state R2
# P2_202D	PACKET/R2/IMPROPER/P02D	0127	Verify the IUT discards a Clear Confirmation with LCI=0 received in state R2
# P2_202E	PACKET/R2/IMPROPER/P02E	0128	Verify the IUT discards a Data packet with LCI=0 received in

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
# P2_202F	PACKET/R2/IMPROPER/P02F	0128	state R2 Verify the IUT discards an Interrupt packet with LCI=0 received in state R2
# P2_202G	PACKET/R2/IMPROPER/P02G	0129	Verify the IUT discards an Interrupt Confirmation with LCI=0 received in state R2
# P2_202H	PACKET/R2/IMPROPER/P02H	0129	Verify the IUT discards a Receive Ready (RR) with LCI=0 received in state R2
# P2_202I	PACKET/R2/IMPROPER/P02I	0130	Verify the IUT discards a Receive Not Ready (RNR) with LCI=0 received in state R2
# P2_202J	PACKET/R2/IMPROPER/P02J	0130	Verify the IUT discards a Reset Indication with LCI=0 received in state R2
# P2_202K	PACKET/R2/IMPROPER/P02K	0131	Verify the IUT discards a Reset Confirmation with LCI=0 received in state R2
# P2_202L	PACKET/R2/IMPROPER/P02L	0131	Verify the IUT discards a Reject packet with LCI=0 received in state R2
# P2_203A	PACKET/R2/IMPROPER/P03A	0132	Verify the IUT discards an unidentified packet on logical channel zero received in state R2
# P2_203B	PACKET/R2/IMPROPER/P03B	0132	Verify the IUT discards an unidentified packet on a valid logical channel received in state R2
# P2_203C	PACKET/R2/IMPROPER/P03C	0133	Verify the IUT discards an unidentified packet on an unassigned logical channel received in state R2
# P2_204	PACKET/R2/IMPROPER/P04	0133	Verify the IUT discards a Restart Indication with LCI not equal to zero received in state R2
# P2_205	PACKET/R2/IMPROPER/P05	0134	Verify the IUT discards a Restart Confirmation with LCI not equal to zero received in state R2
# P2_206	PACKET/R2/IMPROPER/P06	0134	Verify the IUT Restarts a too short Restart Indication received in state R2
# P2_207	PACKET/R2/IMPROPER/P07	0135	Verify the IUT Restarts a too long Restart Indication received in state R2
# P2_208	PACKET/R2/IMPROPER/P08	0135	Verify the IUT Restarts a too long Restart Confirmation received in state R2
# P2_210	PACKET/R2/IMPROPER/P10	0136	Verify the IUT does not respond to a Diagnostic packet on an

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
# P2_211	PACKET/R2/IMPROPER/P11	0136	assigned LCI not equal to zero received in state R2
# P2_212	PACKET/R2/IMPROPER/P12	0137	Verify the IUT discards a too short Diagnostic packet (no Diagnostic code or Explanation fields) received in state R2
# P2_213	PACKET/R2/IMPROPER/P13	0137	Verify the IUT discards a too long Diagnostic packet (explanation field of three octets plus one appended octet) received in state R2
# P2_214	PACKET/R2/IMPROPER/P14	0138	Verify the IUT discards a too short packet (length of one octet) received in state R2
# P2_215A	PACKET/R2/IMPROPER/P15A	0139	Verify the IUT discards Restart Indications with an invalid GFI received in state R2
# P2_215B	PACKET/R2/IMPROPER/P15B	0139	Verify the IUT discards an Incoming Call on an unassigned LCI received in state R2
# P2_215C	PACKET/R2/IMPROPER/P15C	0140	Verify the IUT discards a Call Connected packet on an unassigned LCI received in state R2
# P2_215D	PACKET/R2/IMPROPER/P15D	0140	Verify the IUT discards a Clear Indication on an unassigned LCI received in state R2
# P2_215E	PACKET/R2/IMPROPER/P15E	0141	Verify the IUT discards a Clear Confirmation on an unassigned LCI received in state R2
# P2_215F	PACKET/R2/IMPROPER/P15F	0141	Verify the IUT discards a Data packet on an unassigned LCI received in state R2
# P2_215G	PACKET/R2/IMPROPER/P15G	0142	Verify the IUT discards an Interrupt packet on an unassigned LCI received in state R2
# P2_215H	PACKET/R2/IMPROPER/P15H	0142	Verify the IUT discards an Interrupt Confirmation on an unassigned LCI received in state R2
# P2_215I	PACKET/R2/IMPROPER/P15I	0143	Verify the IUT discards a Receive Ready (RR) on an unassigned LCI received in state R2
# P2_215J	PACKET/R2/IMPROPER/P15J	0143	Verify the IUT discards a Receive Not Ready (RNR) on an unassigned LCI received in state R2
# P2_215K	PACKET/R2/IMPROPER/P15K	0144	Verify the IUT discards a Reset Indication on an unassigned LCI received in state R2
#			Verify the IUT discards a Reset Confirmation on an unassigned LCI received in state R2

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
P2_215L #	PACKET/R2/IMPROPER/P15L	0144	Verify the IUT discards a Reject packet on an unassigned LCI received in state R2
P2_215M #	PACKET/R2/IMPROPER/P15M	0145	Verify the IUT discards a Restart Indication on an unassigned LCI received in state R2
P2_215N #	PACKET/R2/IMPROPER/P15N	0145	Verify the IUT discards a Restart Confirmation on an unassigned LCI received in state R2
P2_301A	PACKET/R2/INOPPORTUNE/P01A	0146	Verify the IUT discards an Incoming Call received in state R2
P2_301B #	PACKET/R2/INOPPORTUNE/P01B	0146	Verify the IUT discards a Call Connected packet received in state R2
P2_301C #	PACKET/R2/INOPPORTUNE/P01C	0147	Verify the IUT discards a Clear Indication received in state R2
P2_301D #	PACKET/R2/INOPPORTUNE/P01D	0147	Verify the IUT discards a Clear Confirmation received in state R2
P2_301E	PACKET/R2/INOPPORTUNE/P01E	0148	Verify the IUT discards a Data packet received in state R2
P2_301F	PACKET/R2/INOPPORTUNE/P01F	0148	Verify the IUT discards an Interrupt received in state R2
P2_301G #	PACKET/R2/INOPPORTUNE/P01G	0149	Verify the IUT discards an Interrupt Confirmation received in state R2
P2_301H #	PACKET/R2/INOPPORTUNE/P01H	0149	Verify the IUT discards a Receive Ready (RR) received in state R2
P2_301I #	PACKET/R2/INOPPORTUNE/P01I	0150	Verify the IUT discards a Receive Not Ready (RNR) received in state R2
P2_301J #	PACKET/R2/INOPPORTUNE/P01J	0150	Verify the IUT discards a Reset Indication received in state R2
P2_301K #	PACKET/R2/INOPPORTUNE/P01K	0151	Verify the IUT discards a Reset Confirmation received in state R2
P2_301L	PACKET/R2/INOPPORTUNE/P01L	0151	Verify the IUT discards a Reject packet received in state R2
P3_101 #	PACKET/R3/PROPER/P01	0153	Verify the IUT accepts a valid Diagnostic packet received in state R3
P3_201 #	PACKET/R3/IMPROPER/P01	0154	Verify the IUT Restarts or discards a packet of length two octets received in state R3
P3_202A #	PACKET/R3/IMPROPER/P02A	0155	Verify the IUT discards an Incoming Call with LCI=0 received in state R3

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
P3_202B #	PACKET/R3/IMPROPER/P02B	0156	Verify the IUT discards a Call Connected packet with LCI=0 received state in R3
P3_202C #	PACKET/R3/IMPROPER/P02C	0157	Verify the IUT discards a Clear Indication with LCI=0 received state in R3
P3_202D #	PACKET/R3/IMPROPER/P02D	0158	Verify the IUT discards a Clear Confirmation with LCI=0 received state in R3
P3_202E #	PACKET/R3/IMPROPER/P02E	0159	Verify the IUT discards a Data packet with LCI=0 received state in R3
P3_202F #	PACKET/R3/IMPROPER/P02F	0160	Verify the IUT discards an Interrupt packet with LCI=0 received state in R3
P3_202G #	PACKET/R3/IMPROPER/P02G	0161	Verify the IUT discards an Interrupt Confirmation with LCI=0 received state in R3
P3_202H #	PACKET/R3/IMPROPER/P02H	0162	Verify the IUT discards a Receive Ready (RR) with LCI=0 received state in R3
P3_202I #	PACKET/R3/IMPROPER/P02I	0163	Verify the IUT discards a Receive Not Ready (RNR) packet with LCI=0 received state in R3
P3_202J #	PACKET/R3/IMPROPER/P02J	0164	Verify the IUT discards a Reset Indication with LCI=0 received state in R3
P3_202K #	PACKET/R3/IMPROPER/P02K	0165	Verify the IUT discards a Reset Confirmation with LCI=0 received state in R3
P3_202L #	PACKET/R3/IMPROPER/P02L	0166	Verify the IUT discards a Reject packet with LCI=0 received state in R3
P3_203A #	PACKET/R3/IMPROPER/P03A	0167	Verify the IUT Restarts on discards an unidentified packet on logical channel zero received in state R3
P3_203B #	PACKET/R3/IMPROPER/P03B	0168	Verify the IUT Restarts or discards an unidentified packet on a valid logical channel received in state R3
P3_203C #	PACKET/R3/IMPROPER/P03C	0169	Verify the IUT Restarts or discards an unidentified packet on an unassigned logical channel received in state R3
P3_204 #	PACKET/R3/IMPROPER/P04	0170	Verify IUT Restarts a Restart Indication with an assigned LCI not equal to zero, received in state R3
P3_205 #	PACKET/R3/IMPROPER/P05	0171	Verify the IUT Restarts a Restart Confirmation with an assigned LCI not equal to zero received in state R3

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
P3_206 #	PACKET/R3/IMPROPER/P06	0172	Verify the IUT discards a too short Restart Indication received in state R3
P3_207 #	PACKET/R3/IMPROPER/P07	0173	Verify the IUT discards a too long Restart Indication received in state R3
P3_208 #	PACKET/R3/IMPROPER/P08	0174	Verify the IUT discards a too long Restart Confirmation received in state R3
P3_210 #	PACKET/R3/IMPROPER/P10	0175	Verify the IUT discards a Diagnostic packet with an assigned ICI not equal to zero received in state R3
P3_211 #	PACKET/R3/IMPROPER/P11	0176	Verify the IUT discards a too short Diagnostic packet received in state R3
P3_212 #	PACKET/R3/IMPROPER/P12	0177	Verify the IUT discards a too long Diagnostic packet received in state R3
P3_213 #	PACKET/R3/IMPROPER/P13	0178	Verify the IUT discards a too short packet received in state R3
P3_214 #	PACKET/R3/IMPROPER/P14	0179	Verify the IUT discards Restart Indications with an invalid GFI received in state R3
P3_215A #	PACKET/R3/IMPROPER/P15A	0181	Verify the IUT discards an Incoming Call on an unassigned logical channel received in state R3
P3_215B #	PACKET/R3/IMPROPER/P15B	0182	Verify the IUT discards a Call Connected packet on an unassigned logical channel received in state R3
P3_215C #	PACKET/R3/IMPROPER/P15C	0183	Verify the IUT discards a Clear Indication on an unassigned logical channel received in state R3
P3_215D #	PACKET/R3/IMPROPER/P15D	0184	Verify the IUT discards a Clear Confirmation on an unassigned logical channel received in state R3
P3_215E #	PACKET/R3/IMPROPER/P15E	0185	Verify the IUT discards a Data packet on an unassigned logical channel received in state R3
P3_215F #	PACKET/R3/IMPROPER/P15F	0186	Verify the IUT discards an Interrupt on an unassigned logical channel received in state R3
P3_215G #	PACKET/R3/IMPROPER/P15G	0187	Verify the IUT discards an Interrupt Confirmation on an unassigned logical channel received in state R3
P3_215H #	PACKET/R3/IMPROPER/P15H	0188	Verify the IUT discards a Receive Ready (RR) on an unassigned logical channel received in state R3

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
P3_215I #	PACKET/R3/IMPROPER/P15I	0189	Verify the IUT discards a Receive Not Ready (RNR) on an unassigned logical channel received in state R3
P3_215J #	PACKET/R3/IMPROPER/P15J	0190	Verify the IUT discards a Reset Indication on an unassigned logical channel received in state R3
P3_215K #	PACKET/R3/IMPROPER/P15K	0191	Verify the IUT discards a Reset Confirmation on an unassigned logical channel received in state R3
P3_215L #	PACKET/R3/IMPROPER/P15L	0192	Verify the IUT discards a Reject on an unassigned logical channel received in state R3
P3_215M #	PACKET/R3/IMPROPER/P15M	0193	Verify the IUT discards a Restart on an unassigned logical channel received in state R3
P3_215N #	PACKET/R3/IMPROPER/P15N	0194	Verify the IUT discards a Restart Confirmation on an unassigned logical channel received in state R3
P3_301 #	PACKET/R3/INOPPORTUNE/P01	0195	Verify the IUT discards a Restart Indication received in state R3
P3_302 #	PACKET/R3/INOPPORTUNE/P02	0196	Verify the IUT Restarts a Restart Confirmation received in state R3
P3_303A #	PACKET/R3/INOPPORTUNE/P03A	0197	Verify the IUT Restarts an Incoming Call received in state R3
P3_303B #	PACKET/R3/INOPPORTUNE/P03B	0198	Verify the IUT Restarts a Call Connected packet received in state R3
P3_303C #	PACKET/R3/INOPPORTUNE/P03C	0199	Verify the IUT Restarts a Clear Indication received in state R3
P3_303D #	PACKET/R3/INOPPORTUNE/P03D	0200	Verify the IUT Restarts a Clear Confirmation received in state R3
P3_303E #	PACKET/R3/INOPPORTUNE/P03E	0201	Verify the IUT Restarts a Data packet received in state R3
P3_303F #	PACKET/R3/INOPPORTUNE/P03F	0202	Verify the IUT Restarts an Interrupt packet received in state R3
P3_303G #	PACKET/R3/INOPPORTUNE/P03G	0203	Verify the IUT Restarts an Interrupt Confirmation received in state R3
P3_303H #	PACKET/R3/INOPPORTUNE/P03H	0204	Verify the IUT Restarts a Receive Ready (RR) packet received in state R3
P3_303I #	PACKET/R3/INOPPORTUNE/P03I	0205	Verify the IUT Restarts a Receive Not Ready (RNR) packet received in state R3

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
P3_303J #	PACKET/R3/INOPPORTUNE/P03J	0206	Verify the IUT Restarts a Reset Indication received in state R3
P3_303K #	PACKET/R3/INOPPORTUNE/P03K	0207	Verify the IUT Restarts a Reset Confirmation received in state R3
P3_303L #	PACKET/R3/INOPPORTUNE/P03L	0208	Verify the IUT Restarts a Reject packet received in state R3
P4_101 #	PACKET/P1/PROPER/P01	0210	Verify the IUT accepts a valid Incoming Call received in state P1
P4_103 #	PACKET/P1/PROPER/P03	0210	Verify that the IUT confirms a CLEAR with cause '01'H received in state P1
P4_104 #	PACKET/P1/PROPER/P04	0211	Verify that the IUT confirms a CLEAR with cause '05'H received in state P1
P4_105 #	PACKET/P1/PROPER/P05	0212	Verify that the IUT confirms a Clear with cause '11'H received in state P1
P4_106 #	PACKET/P1/PROPER/P06	0213	Verify that the IUT confirms a Clear with cause '13'H received in state P1
P4_107 #	PACKET/P1/PROPER/P07	0214	Verify that the IUT confirms a Clear with cause '21'H received in state P1
P4_201 #	PACKET/P1/IMPROPER/P01	0215	Verify the IUT clears a packet of length two octets received in state P1
P4_202 #	PACKET/P1/IMPROPER/P02	0216	Verify that the IUT clears a packet of unidentified type in state P1.
P4_203 #	PACKET/P1/IMPROPER/P03	0217	Verify that the IUT clears a Restart packet with an assigned LCI not equal to zero received in state P1
P4_204 #	PACKET/P1/IMPROPER/P04	0218	Verify that the IUT clears a Restart Confirm packet received on an assigned LCI not equal to zero while in state P1.
P4_205 #	PACKET/P1/IMPROPER/P05	0219	Verify that the IUT clears a too short Incoming Call packet received in state P1
P4_206 #	PACKET/P1/IMPROPER/P06	0220	Verify the IUT clears a too long Incoming Call packet (user data field of 17 or 129 octets) while in state P1
P4_207 #	PACKET/P1/IMPROPER/P07	0221	Verify the IUT clears a too long Call-Connected packet (user data field of 1 or 129 octets) while in state P1
P4_208 #	PACKET/P1/IMPROPER/P08	0222	Verify the IUT clears a too short Clear Indication packet (no

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
P4_209 #	PACKET/P1/IMPROPER/P09	0223	cause code or diagnostic code fields) while in state P1.
P4_210 #	PACKET/P1/IMPROPER/P10	0224	Verify that the IUT clears a too long Clear Indication packet while in state P1.
P4_301 #	PACKET/P1/INOPPORTUNE/P01	0225	Verify that the IUT clears a too long Clear Confirmation packet (110 octets appended to the end of the packet) while in P1
P4_302 #	PACKET/P1/INOPPORTUNE/P02	0225	Verify the IUT clears a Call Connected packet received in state P1
P4_305 #	PACKET/P1/INOPPORTUNE/P05	0226	Verify the IUT clears a Clear Confirm packet received in state P1
P4_306 #	PACKET/P1/INOPPORTUNE/P06	0226	Verify the IUT clears a Interrupt Confirmation packet received in state P1
P4_307 #	PACKET/P1/INOPPORTUNE/P07	0227	Verify the IUT clears an RR packet received in state P1
P4_308 #	PACKET/P1/INOPPORTUNE/P08	0227	Verify the IUT clears an RNR packet received in state P1
P4_309 #	PACKET/P1/INOPPORTUNE/P09	0228	Verify the IUT clears a Reset packet received in state P1
P4_310 #	PACKET/P1/INOPPORTUNE/P10	0228	Verify the IUT clears a Reset Confirmation packet received in state P1
P5_101 #	PACKET/P2/PROPER/P01	0230	Verify the IUT clears an Interrupt packet received in state P1
P5_103 #	PACKET/P2/PROPER/P03	0230	Verify the IUT correctly handles an Incoming Call received in state P2
P5_104 #	PACKET/P2/PROPER/P04	0231	Verify the IUT accepts a Call Connected packet while in P2.
P5_105 #	PACKET/P2/PROPER/P05	0232	Verify the IUT confirms a Clear with cause code of '01'H received in state P2
P5_106 #	PACKET/P2/PROPER/P06	0232	Verify the IUT confirms a Clear with cause code of '05'H received in state P2
P5_107 #	PACKET/P2/PROPER/P07	0233	Verify the IUT confirms a Clear with cause code of '11'H received in state P2
P5_108 #	PACKET/P2/PROPER/P08	0234	Verify the IUT confirms a Clear with cause code of '13'H received in state P2
P5_201 #	PACKET/P2/IMPROPER/P01	0235	Verify the IUT confirms a Clear with cause code of '21'H received in state P2
P5_201 #	PACKET/P2/IMPROPER/P01	0236	Verify the IUT clears a packet of length two octets received

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
# P5_202	PACKET/P2/IMPROPER/P02	0237	in state P2 Verify the IUT clears a packet with an undefined PTI field received in state P2
# P5_203	PACKET/P2/IMPROPER/P03	0238	Verify the IUT Clears a Restart Indication with LCI<>0 received in state P2
# P5_204	PACKET/P2/IMPROPER/P04	0239	Verify the IUT clears a Restart Confirmation with LCI<>0 received in state P2
# P5_205	PACKET/P2/IMPROPER/P05	0240	Verify the IUT clears or discards a too short Incoming Call received in state P2
# P5_206	PACKET/P2/IMPROPER/P06	0241	Verify the IUT clears or discards a too long Incoming Call packet (user data field of 17 or 129 octets) received in state P2
# P5_207	PACKET/P2/IMPROPER/P07	0243	Verify the IUT clears a too long Call Connected packet (user data field of 1 or 129 octets) received in state P2
# P5_208	PACKET/P2/IMPROPER/P08	0244	Verify the IUT clears a too short Clear Indication packet (no cause code or diagnostic code) received in state P2
# P5_209	PACKET/P2/IMPROPER/P09	0245	Verify the IUT clears a too long Clear Indication packet received in state P2
# P5_210	PACKET/P2/IMPROPER/P10	0246	Verify the IUT clears a too long Clear Confirmation packet received in state P2
# P5_301	PACKET/P2/INOPPORTUNE/P01	0247	Verify the IUT clears a Clear Confirmation packet with valid Logical Channel Identifier while in state P2
# P5_302	PACKET/P2/INOPPORTUNE/P02	0247	Verify the IUT clears a Data packet with valid Logical Channel Identifier while in state P2
# P5_303	PACKET/P2/INOPPORTUNE/P03	0248	Verify the IUT clears an Interrupt packet with valid Logical Channel Identifier while in state P2
# P5_304	PACKET/P2/INOPPORTUNE/P04	0248	Verify the IUT clears an Interrupt Confirmation packet with valid Logical Channel Identifier while in state P2
# P5_305	PACKET/P2/INOPPORTUNE/P05	0249	Verify the IUT clears an RR packet with valid Logical Channel Identifier while in state P2
# P5_306	PACKET/P2/INOPPORTUNE/P06	0249	Verify the IUT clears a RNR packet with valid Logical Channel Identifier while in state P2

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
P5_307 #	PACKET/P2/INOPPORTUNE/P07	0250	Verify the IUT clears a Reset packet with valid Logical Channel Identifier while in state P2
P5_308 #	PACKET/P2/INOPPORTUNE/P08	0250	Verify that the IUT clears a Reset Confirm packet with valid Logical Channel Identifier while in state P2
P6_101 #	PACKET/P3/PROPER/P01	0252	Verify the IUT confirms a Clear with cause '01'H received in state P3
P6_102 #	PACKET/P3/PROPER/P02	0253	Verify the IUT confirms a CLEAR with cause '05'H received in state P3
P6_103 #	PACKET/P3/PROPER/P03	0254	Verify the IUT confirms a CLEAR with cause '11'H received in state P3
P6_104 #	PACKET/P3/PROPER/P04	0255	Verify the IUT confirms a CLEAR with cause '13'H received in state P3
P6_105 #	PACKET/P3/PROPER/P05	0256	Verify the IUT confirms a CLEAR with cause '21'H received in state P3
P6_201 #	PACKET/P3/IMPROPER/P01	0257	Verify the IUT clears a too short packet with length two octets received in state P3
P6_202 #	PACKET/P3/IMPROPER/P02	0258	Verify the IUT clears a packet of undefined type received in state P3
P6_203 #	PACKET/P3/IMPROPER/P03	0259	Verify the IUT clears a Restart packet on an assigned LCI not equal to zero received in state P3
P6_204 #	PACKET/P3/IMPROPER/P04	0260	Verify the IUT clears a Restart Confirmation packet on an assigned LCI not equal to zero received in state P3
P6_205 #	PACKET/P3/IMPROPER/P05	0261	Verify the IUT clears a too short Incoming Call packet received in P3
P6_206 #	PACKET/P3/IMPROPER/P06	0262	Verify the IUT clears a too long Incoming Call packet (user data field of 17 or 129 octets) received in state P3
P6_207 #	PACKET/P3/IMPROPER/P07	0263	Verify the IUT clears a too long Call Connected packet (user data field of 1 or 129 octets) received in state P3
P6_208 #	PACKET/P3/IMPROPER/P08	0264	Verify the IUT clears a too short Clear Indication packet (no cause code or diagnostic code fields) received in state P3
P6_209 #	PACKET/P3/IMPROPER/P09	0265	Verify the IUT clears a too long Clear Indication packet received in state P3

Continued on next page

..... Continued from previous page .

Test Case Id.	Test Case Reference	Page	Description
P6_210 #	PACKET/P3/IMPROPER/P10	0266	Verify the IUT clears a too long Clear Confirmation packet (110 octets appended to the end of the packet) received in state P3
P6_301 #	PACKET/P3/INOPPORTUNE/P01	0267	Verify the IUT clears an Incoming Call received in state P3
P6_303 #	PACKET/P3/INOPPORTUNE/P03	0267	Verify the IUT clears a Call Connected packet received in state P3
P6_304 #	PACKET/P3/INOPPORTUNE/P04	0268	Verify the IUT clears a Clear Confirmation packet received in state P3
P6_305 #	PACKET/P3/INOPPORTUNE/P05	0268	Verify the IUT clears a Data packet received in state P3
P6_306 #	PACKET/P3/INOPPORTUNE/P06	0269	Verify the IUT clears an Interrupt packet received in state P3
P6_307 #	PACKET/P3/INOPPORTUNE/P07	0269	Verify the IUT clears an Interrupt Confirm received in state P3
P6_308 #	PACKET/P3/INOPPORTUNE/P08	0270	Verify the IUT clears an RR packet received in state P3
P6_309 #	PACKET/P3/INOPPORTUNE/P09	0270	Verify the IUT clears an RNR packet received in state P3
P6_310 #	PACKET/P3/INOPPORTUNE/P10	0271	Verify the IUT clears a Reset Indication received in state P3
P6_311 #	PACKET/P3/INOPPORTUNE/P11	0271	Verify the IUT clears a Reset Confirmation received in state P3
P7_101 #	PACKET/P4/PROPER/P01	0273	Verify the IUT acknowledges a Clear with cause code '01'H received in state P4
P7_102 #	PACKET/P4/PROPER/P02	0274	Verify the IUT acknowledges a Clear with cause code '05'H while in state P4
P7_103 #	PACKET/P4/PROPER/P03	0275	Verify the IUT acknowledges a Clear with cause code '11'H while in state P4
P7_104 #	PACKET/P4/PROPER/P04	0276	Verify the IUT acknowledges a Clear with cause code '13'H received in state P4
P7_105 #	PACKET/P4/PROPER/P05	0277	Verify the IUT acknowledges a Clear with cause code '21'H while in state P4
P7_201 #	PACKET/P4/IMPROPER/P01	0278	Verify the IUT clears a too short Incoming Call packet received in state P4
P7_202 #	PACKET/P4/IMPROPER/P02	0279	Verify the IUT clears a too long Incoming Call packet (user data field of 17 or 129 octets) received in state P4
P7_203 #	PACKET/P4/IMPROPER/P03	0280	Verify the IUT clears a too long Call Connected packet (user

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
# P7_204	PACKET/P4/IMPROPER/P04	0281	data field of 1 or 129 octets) received in P4
# P7_205	PACKET/P4/IMPROPER/P05	0282	Verify the IUT clears a too short Clear Indication packet (no cause code or diagnostic code fields) received in state P4
# P7_206	PACKET/P4/IMPROPER/P06	0283	Verify the IUT clears a too long Clear Indication packet received in state P4
# P7_301	PACKET/P4/INOPPORTUNE/P01	0284	Verify the IUT clears a too long Clear Confirmation packet (110 octets appended to the end of the packet) received in state P4
# P7_303	PACKET/P4/INOPPORTUNE/P03	0285	Verify the IUT clears an Incoming Call packet received in state P4
# P7_304	PACKET/P4/INOPPORTUNE/P04	0286	Verify the IUT clears a Call Connected packet received in state P4
# P8_101	PACKET/P5/PROPER/P01	0288	Verify the IUT clears a Clear Confirmation packet received in state P4
# P8_102	PACKET/P5/PROPER/P02	0289	Verify P5 to P4 transition using a Call Connected packet
# P8_103	PACKET/P5/PROPER/P03	0290	Verify the IUT confirms a Clear with cause '01'H received in state P5
# P8_104	PACKET/P5/PROPER/P04	0291	Verify the IUT confirms a Clear with cause '05'H received in state P5
# P8_105	PACKET/P5/PROPER/P05	0292	Verify the IUT confirms a Clear with cause '11'H received in state P5
# P8_106	PACKET/P5/PROPER/P06	0293	Verify the IUT confirms a Clear with cause '13'H received in state P5
# P8_201	PACKET/P5/IMPROPER/P01	0294	Verify the IUT confirms a Clear with cause '21'H received in state P5
# P8_202	PACKET/P5/IMPROPER/P02	0295	Verify IUT clears a too short packet (PTI field is NIL) received in state P5
# P8_203	PACKET/P5/IMPROPER/P03	0296	Verify the IUT Clears a packet of undefined type (PTI equal '0D'H) received in state P5
# P8_204	PACKET/P5/IMPROPER/P04	0297	Verify the IUT Clears a Restart packet on an assigned LCI not equal to zero received in state P5
			Verify the IUT Clears a Restart Confirmation packet on an

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
# P8_205	PACKET/P5/IMPROPER/P05	0298	assigned LCI not equal to zero received in state P5
# P8_206	PACKET/P5/IMPROPER/P06	0299	Verify the IUT Clears a too short Incoming Call packet; no called address field, received in state P5
# P8_207	PACKET/P5/IMPROPER/P07	0300	Verify the IUT Clears or discards a too long Incoming Call packet (user data field of 17 or 129 octets) received in state P5
# P8_208	PACKET/P5/IMPROPER/P08	0301	Verify the IUT Clears a too long Call Connected packet (user data field of 1 or 129 octets) received in state P5
# P8_209	PACKET/P5/IMPROPER/P09	0302	Verify the IUT Clears a too short Clear Indication packet (no cause or diagnostic code fields) received in state P5
# P8_210	PACKET/P5/IMPROPER/P10	0303	Verify the IUT Clears a too long Clear Indication packet received in state P5
# P8_301	PACKET/P5/INOPPORTUNE/P01	0304	Verify the IUT Clears a too long Clear Confirmation packet (110 octets appended to the end of the packet) received in state P5
# P8_303	PACKET/P5/INOPPORTUNE/P03	0304	Verify the IUT clears an Incoming Call received in state P5
# P8_304	PACKET/P5/INOPPORTUNE/P04	0305	Verify the IUT Clears a Clear Confirmation received in state P5
# P8_305	PACKET/P5/INOPPORTUNE/P05	0305	Verify the IUT Clears a Data packet received in state P5
# P8_306	PACKET/P5/INOPPORTUNE/P06	0306	Verify the IUT Clear and Interrupt packet received in state P5
# P8_307	PACKET/P5/INOPPORTUNE/P07	0306	Verify the IUT Clears an Interrupt packet received in state P5
# P8_308	PACKET/P5/INOPPORTUNE/P08	0307	Verify the IUT Clears a Receiver Ready (RR) packet received in state P5
# P8_309	PACKET/P5/INOPPORTUNE/P09	0307	Verify the IUT Clears a Receiver Ready (RNR) packet received in state P5
# P8_310	PACKET/P5/INOPPORTUNE/P10	0308	Verify the IUT Clears a Reset Indication packet received in state P5
# P9_101	PACKET/P6/PROPER/P01	0310	Verify the IUT Clears a Reset Confirmation packet received in state P5
# P9_102	PACKET/P6/PROPER/P02	0310	Verify the IUT accepts a Clear with cause code '01'H received in state P6
		0310	Verify the IUT accepts a clear with cause code '05'H received in state P6

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
# P9_103	PACKET/P6/PROPER/P03	0311	in state P6 Verify the IUT accepts a clear with cause code '11'H received in state P6
# P9_104	PACKET/P6/PROPER/P04	0311	Verify the IUT accepts a clear with cause code '13'H received in state P6
# P9_105	PACKET/P6/PROPER/P05	0312	Verify the IUT accepts a clear with cause code '21'H received in state P6
# P9_106	PACKET/P6/PROPER/P06	0312	Verify the IUT accepts a valid Clear Confirmation received in state P6
# P9_201	PACKET/P6/IMPROPER/P01	0313	Verify the IUT discards a too short packet (two octets) received in state P6
# P9_202	PACKET/P6/IMPROPER/P02	0313	Verify the IUT discards an unidentifiable packet received in state P6
# P9_203	PACKET/P6/IMPROPER/P03	0314	Verify the IUT discards Restart (LCI <> zero) received in state P6
# P9_204	PACKET/P6/IMPROPER/P04	0314	Verify the IUT discards a Restart Confirmation (LCI <> zero) received in state P6
# P9_205	PACKET/P6/IMPROPER/P05	0315	Verify the IUT discards a too short Incoming Call (no called address field) received in state P6
# P9_206	PACKET/P6/IMPROPER/P06	0316	Verify the IUT discards a too long Incoming Call packet (user data field of 17 or 129 octets) received in state P6
# P9_207	PACKET/P6/IMPROPER/P07	0317	Verify the IUT discards a too long Call Connected packet (user data field of 1 or 129 octets) received in state P6.
# P9_208	PACKET/P6/IMPROPER/P08	0318	Verify the IUT Clears a too short Clear Indication packet (no cause code or diagnostic code fields) received in state P6.
# P9_209	PACKET/P6/IMPROPER/P09	0319	Verify the IUT Clears a too long Clear Indication packet (user data field of 129 octets) received in state P6
# P9_210	PACKET/P6/IMPROPER/P10	0320	Verify the IUT Clears a too long Clear Confirmation (110 octets appended to the end of the packet) received in state P6.
# P9_301	PACKET/P6/INOPPORTUNE/P01	0321	Verify the IUT discards an Incoming Call packet received in state P6

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
P9_303	PACKET/P6/INOPPORTUNE/P03	0321	Verify the IUT discards a Call Connected received in state P6
P9_304	PACKET/P6/INOPPORTUNE/P04	0322	Verify the IUT discards a Data packet received in state P6
P9_305	PACKET/P6/INOPPORTUNE/P05	0322	Verify the IUT discards an Interrupt packet received in state P6
P9_306	PACKET/P6/INOPPORTUNE/P06	0323	Verify the IUT discards an Interrupt Confirm received in state P6
P9_307	PACKET/P6/INOPPORTUNE/P07	0323	Verify the IUT discards an RR packet received in state P6
P9_308	PACKET/P6/INOPPORTUNE/P08	0324	Verify the IUT discards an RNR packet received in state P6
P9_309	PACKET/P6/INOPPORTUNE/P09	0324	Verify the IUT discards a Reset packet received in state P6
P9_310	PACKET/P6/INOPPORTUNE/P10	0325	Verify the IUT discards a Reset Confirmation received in state P6
P10_201	PACKET/P7/IMPROPER/P01	0327	Verify the IUT Clears a too short packet (two octets) received in state P7
P10_202	PACKET/P7/IMPROPER/P02	0328	Verify the IUT Clears an unidentifiable packet received in state P7
P10_203	PACKET/P7/IMPROPER/P03	0329	Verify the IUT Clears a Restart Indication (LCI <> zero) received in state P7
P10_204	PACKET/P7/IMPROPER/P04	0330	Verify the IUT Clears a Restart Confirmation (LCI <> zero) received in state P7
P10_205	PACKET/P7/IMPROPER/P05	0331	Verify the IUT in state P7 Clears a too short Incoming Call (no called address field) received in state P7
P10_206	PACKET/P7/IMPROPER/P06	0332	Verify the IUT Clears a too long Incoming Call (user data field of 17 or 129 octets) received in state P7
P10_207	PACKET/P7/IMPROPER/P07	0333	Verify the IUT Clears a too long Call Connected packet (user data field of 1 or 129 octets) received in state P7
P10_208	PACKET/P7/IMPROPER/P08	0334	Verify the IUT discards a too short Clear Indication packet (no cause or diagnostic fields) received in state P7.
P10_209	PACKET/P7/IMPROPER/P09	0335	Verify the IUT discards a too long Clear Indication packet (user data field of 129 octets) received in state P7
P10_210	PACKET/P7/IMPROPER/P10	0336	Verify the IUT Clears a too long Clear Confirmation packet (110 octets appended) received in state P7
P10_301	PACKET/P7/INOPPORTUNE/P01	0337	Verify the IUT Clears an Incoming Call received in state P7

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
P10_303 #	PACKET/P7/INOPPORTUNE/P03	0338	Verify the IUT Clears a Call Connected packet received in state P7
P10_304 #	PACKET/P7/INOPPORTUNE/P04	0339	Verify the IUT discards a Clear Indication with cause '01'H received in state P7
P10_305 #	PACKET/P7/INOPPORTUNE/P05	0340	Verify the IUT discards a Clear Indication with cause code '05'H received in state P7
P10_306 #	PACKET/P7/INOPPORTUNE/P06	0341	Verify the IUT discards a Clear Indication with cause '11'H received in state P7
P10_307 #	PACKET/P7/INOPPORTUNE/P07	0342	Verify the IUT discards a Clear Indication with cause '13'H received in state P7
P10_308 #	PACKET/P7/INOPPORTUNE/P08	0343	Verify the IUT discards a Clear Indication with cause '21'H received in state P7
P10_309 #	PACKET/P7/INOPPORTUNE/P09	0344	Verify the IUT clears a Clear Confirm packet received in state P7
P10_310 #	PACKET/P7/INOPPORTUNE/P10	0345	Verify that IUT clears a Data packet received in state P7
P10_311 #	PACKET/P7/INOPPORTUNE/P11	0346	Verify the IUT clears an Interrupt packet received in state P7
P10_312 #	PACKET/P7/INOPPORTUNE/P12	0347	Verify the IUT clears an Interrupt Confirmation received in state P7
P10_313 #	PACKET/P7/INOPPORTUNE/P13	0348	Verify the IUT clears an RR packet received in state P7
P10_314 #	PACKET/P7/INOPPORTUNE/P14	0349	Verify the IUT clears RNR packet received in state P7
P10_315 #	PACKET/P7/INOPPORTUNE/P15	0350	Verify the IUT clears a Reset packet received in state P7
P10_316 #	PACKET/P7/INOPPORTUNE/P16	0351	Verify the IUT clears a Reset Confirmation received in state P7
P11_101 #	PACKET/D1/PROPER/P01	0353	Verify the IUT accepts a Reset Indication received in state D1
P11_102 #	PACKET/D1/PROPER/P02	0354	Verify the IUT can accept Data in state D1
P11_103 #	PACKET/D1/PROPER/P03	0355	Verify the IUT can accept Data after a Reset/Reset Confirmation exchange in state D1
P11_201 #	PACKET/D1/IMPROPER/P01	0357	Verify the IUT Resets a too short packet (two octets) received in state D1
P11_202 #	PACKET/D1/IMPROPER/P02	0358	Verify the IUT Resets an unidentifiable packet (PTI field equals '0D'H) received in state D1
P11_203 #	PACKET/D1/IMPROPER/P03	0359	Verify the IUT Resets a Restart Indication with an assigned

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
# P11_204	PACKET/D1/IMPROPER/P04	0360	LCI not equal to zero received in state D1
# P11_205	PACKET/D1/IMPROPER/P05	0361	Verify the IUT Resets a Restart Confirmation packet with an assigned LCI not equal to zero received in state D1
# P11_206	PACKET/D1/IMPROPER/P06	0362	Verify the IUT Resets a too short Reset Indication (Diagnostic field is NIL) received in state D1
# P11_207	PACKET/D1/IMPROPER/P07	0363	Verify the IUT Resets a too long Reset Indication (one octet appended) received in state D1
# P11_301	PACKET/D1/INOPPORTUNE/P01	0364	Verify the IUT Resets a too long Reset Confirmation packet (one octet appended) received in state D1
# P11_302	PACKET/D1/INOPPORTUNE/P02	0365	Verify the IUT Resets an Incoming Call packet received on a PVC in state D1
# P11_303	PACKET/D1/INOPPORTUNE/P03	0366	Verify the IUT Resets a Clear Indication received on a PVC in state D1
# P12_101	PACKET/D2/PROPER/P01	0368	Verify the IUT changes to state D1 when a Reset Indication is received in state D2
# P12_102	PACKET/D2/PROPER/P02	0368	Verify the IUT is in state D1 after receiving a Reset Confirmation while in state D2
# P12_201	PACKET/D2/IMPROPER/P01	0369	Verify the IUT discards a too short packet (two octets) received in state D2
# P12_202	PACKET/D2/IMPROPER/P02	0369	Verify the IUT discards an unidentifiable packet (PTI = '0D'H) received in state D2
# P12_203	PACKET/D2/IMPROPER/P03	0370	Verify the IUT discards a Restart with an assigned LCI not equal to zero received in state D2
# P12_204	PACKET/D2/IMPROPER/P04	0370	Verify the IUT discards a Restart Confirmation with an assigned LCI not equal to zero received in state D2
# P12_205	PACKET/D2/IMPROPER/P05	0371	Verify the IUT Resets a too short Reset Indication received in state D2
# P12_206	PACKET/D2/IMPROPER/P06	0371	Verify the IUT Resets a too long Reset Indication (one octet appended) received in state D2
# P12_207	PACKET/D2/IMPROPER/P07	0372	Verify the IUT Resets long Reset Confirmation packet (one

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
# P12_301	PACKET/D2/INOOPORTUNE/P01	0372	octet appended) received in state D2 Verify the IUT discards an Interrupt packet received in state D2
# P12_302	PACKET/D2/INOOPORTUNE/P02	0373	Verify the IUT discards an Interrupt Confirmation packet received in state D2
# P12_303	PACKET/D2/INOOPORTUNE/P03	0373	Verify the IUT discards a Data packet received in D2
# P12_304	PACKET/D2/INOOPORTUNE/P04	0374	Verify the IUT discards an RR packet received in D2
# P12_305	PACKET/D2/INOOPORTUNE/P05	0374	Verify the IUT discards an RNR packet received in D2
# P12_306	PACKET/D2/INOOPORTUNE/P06	0375	Verify the IUT discards an Incoming Call packet received on a PVC in state D2
# P12_307	PACKET/D2/INOOPORTUNE/P07	0375	Verify the IUT discards a Clear Indication packet received on a PVC in state D2
# P13_201	PACKET/D3/IMPROPER/P01	0377	Verify the IUT Resets a too short packet (two octets) received in state D3
# P13_202	PACKET/D3/IMPROPER/P02	0378	Verify the IUT Resets or Discards an unidentifiable packet (PTI field equals '0D'H) received in state D3
# P13_203	PACKET/D3/IMPROPER/P03	0379	Verify the IUT Resets a Restart with an assigned LCI not equal to zero received in state D3
# P13_204	PACKET/D3/IMPROPER/P04	0380	Verify the IUT Resets a Restart Confirmation on an assigned LCI not equal to zero received in state D3
# P13_205	PACKET/D3/IMPROPER/P05	0381	Verify the IUT Resets a too short Reset Indication (Cause field is NIL, Diagnostic field is NIL) received in state D3
# P13_206	PACKET/D3/IMPROPER/P06	0382	Verify the IUT Resets a too long Reset Indication (one octet appended) received in state D3
# P13_207	PACKET/D3/IMPROPER/P07	0383	Verify the IUT Resets a too long Reset Confirmation (one octet appended) received in state D3
# P13_301	PACKET/D3/INOOPORTUNE/P01	0384	Verify the IUT discards a Reset Indication received in state D3
# P13_302	PACKET/D3/INOOPORTUNE/P02	0385	Verify the IUT Resets a Reset Confirmation received in state D3
# P13_303	PACKET/D3/INOOPORTUNE/P03	0386	Verify the IUT Resets an Interrupt packet received in state D3
# P13_304	PACKET/D3/INOOPORTUNE/P04	0387	Verify the IUT Resets an Interrupt Confirmation received in state D3

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
# P13_305	PACKET/D3/INOPPORTUNE/P05	0388	state D3 Verify the IUT Resets a Data packet received in state D3
# P13_306	PACKET/D3/INOPPORTUNE/P06	0389	Verify the IUT Resets an RR packet received in state D3
# P13_307	PACKET/D3/INOPPORTUNE/P07	0390	Verify the IUT Resets an RNR packet received in state D3
# P13_308	PACKET/D3/INOPPORTUNE/P08	0391	Verify the IUT Resets an Incoming Call packet received on a PVC in state D3
# P13_309	PACKET/D3/INOPPORTUNE/P09	0392	Verify the IUT Resets a Clear Indication received on a PVC in state D3
# P14_201	PACKET/I1/IMPROPER/P01	0394	Verify the IUT Resets a too long Interrupt Confirmation (one octet appended) packet received in state I1
# P14_301	PACKET/I1/INOPPORTUNE/P01	0395	Verify the IUT Resets an Interrupt Confirmation received in state I1
# P15_101	PACKET/I2/PROPER/P01	0397	Verify the IUT moves from state I2 to I1 when an Interrupt Confirmation is received in state I2
# P15_201	PACKET/I2/IMPROPER/P01	0398	Verify the IUT Resets a too long Interrupt Confirmation packet received in state I2
# P16_101	PACKET/J1/PROPER/P01	0401	Verify the IUT confirms an Interrupt received in state J1
# P16_201	PACKET/J1/IMPROPER/P01	0402	Verify the IUT Resets a too short Interrupt packet in state J1
# P16_202	PACKET/J1/IMPROPER/P02	0403	Verify the IUT Resets a too long Interrupt (1 or 32 octets appended) received in state J1
# P17_201	PACKET/J2/IMPROPER/P01	0405	Verify the IUT Resets a too short Interrupt received in state J2
# P17_202	PACKET/J2/IMPROPER/P02	0406	Verify the IUT Resets a too long Interrupt packet (1 or 32 octets appended) received in state J2
# P17_301	PACKET/J2/INOPPORTUNE/P01	0407	Verify the IUT Resets an Interrupt packet received in state J2
# P18_101	PACKET/F1/PROPER/P01	0409	Verify the IUT will accept a window of DATA packets received in state F1
# P18_102	PACKET/F1/PROPER/P02	0410	Verify the IUT accepts an RNR packet after receiving a window of Data packets in state F1
# P18_201	PACKET/F1/IMPROPER/P01	0411	Verify the IUT Resets or discards a too long RR packet (one octet appended) received in state F1
# P18_202	PACKET/F1/IMPROPER/P02	0412	Verify the IUT Resets or discards too long RNR packet received

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
# P18_301	PACKET/F1/INOPPORTUNE/P01	0413	in state F1 Verify the IUT Resets an RR with an invalid P (R) received in state F1
# P18_302	PACKET/F1/INOPPORTUNE/P02	0414	Verify the IUT Resets an RNR with invalid P (R) received in state F1
# P19_101	PACKET/F2/PROPER/P01	0416	Verify the IUT accepts a RR packet received in state F2
# P19_201	PACKET/F2/IMPROPER/P01	0417	Verify the IUT Resets or discards a too long RR packet (one octet appended) received in state F2
# P19_202	PACKET/F2/IMPROPER/P02	0419	Verify the IUT Resets or discards a too long RNR packet (one octet appended) received in state F2
# P19_301	PACKET/F2/INOPPORTUNE/P01	0421	Verify the IUT Resets an RR with an invalid P (R) received in state F2
# P19_302	PACKET/F2/INOPPORTUNE/P02	0422	Verify the IUT Resets an RNR with an invalid P (R) received in state F2
# P20_101	PACKET/G1/PROPER/P01	0424	Verify the IUT is capable of receiving both values of the Q-bit received in state G1
# P20_102	PACKET/G1/PROPER/P02	0424	Verify the IUT can accept a Data packet with no user data received in state G1
# P20_201	PACKET/G1/IMPROPER/P01	0425	Verify the IUT discards, Rejects or Resets a too long Data packet received in state G1
# P20_203	PACKET/G1/IMPROPER/P03	0426	Verify the IUT discards, Reject or Resets a too long Data packet with the M-bit set, received in state G1
# P20_301	PACKET/G1/INOPPORTUNE/P01	0427	Verify the IUT Resets a Data packet with bad P (R) received in state G1
# P20_302	PACKET/G1/INOPPORTUNE/P02	0428	Verify the IUT Resets, Rejects, or discards a Data packet with bad (S) received in state G1
# P20_308	PACKET/G1/INOPPORTUNE/P08	0429	Verify the IUT Resets a Data packet with D-bit set, when Delivery Confirmation is not used in state G1
# P22_101	PACKET/WINDOW/PROPER/P01	0432	Verify the IUT can transmit a full window of Data packets and observe the maximum window size
# P22_102	PACKET/WINDOW/PROPER/P02	0434	Verify the IUT will not send Data packets when the receiver (Tester) is in the Busy condition (RNR)

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
P22_105	PACKET/WINDOW/PROPER/P05	0435	Verify the IUT properly processes the sequence number modulo
P22_106	PACKET/WINDOW/PROPER/P06	0436	Verify the IUT supports Data packets with the M-bit set.
P22_202	PACKET/WINDOW/IMPROPER/P02	0437	Verify the IUT Resets a Data packet with an M-bit violation received in state D1
P22_203	PACKET/WINDOW/IMPROPER/P03	0438	Verify the IUT resets a Data packet with a changing Q bit
P22_204	PACKET/WINDOW/IMPROPER/P04	0439	Verify the IUT Resets or Rejects a Data packet with invalid P (S) received in state D1
P23_101	PACKET/TIMER/PROPER/P01	0441	Verify T20 timer operation
P23_102	PACKET/TIMER/PROPER/P02	0442	Verify T21 timer operation
P23_103	PACKET/TIMER/PROPER/P03	0443	Verify T22 timer operation for both VCs and PVCs
P23_105	PACKET/TIMER/PROPER/P05	0444	Verify T23 timer operation
P23_107	PACKET/TIMER/PROPER/P07	0445	Verify T25 timer operation for VCs and PVCs
P23_108	PACKET/TIMER/PROPER/P08	0446	Verify T26 timer operation for VCs and PVCs
P23_109	PACKET/TIMER/PROPER/P09	0447	Verify T27 timer operation for VCs and PVCs
P23_110	PACKET/TIMER/PROPER/P10	0448	Verify T28 timer operation for VCs and PVCs
P24_101	PACKET/ADDRESS/PROPER/P01	0450	Verify the IUT accepts an Incoming Call with maximum called address length
P24_102	PACKET/ADDRESS/PROPER/P02	0450	Verify the IUT accepts an Incoming Call with a valid calling and called address
P24_202	PACKET/ADDRESS/IMPROPER/P02	0451	Verify the IUT Clears an Incoming call packet with invalid called address
P24_203	PACKET/ADDRESS/IMPROPER/P03	0452	Verify the IUT Clears an Incoming Call packet with an invalid calling address
P25_101	PACKET/FACILITY/PROPER/P01	0454	Verify the IUT supports fast select acceptance with no restriction on response
P25_102	PACKET/FACILITY/PROPER/P02	0454	Verify the IUT supports fast select acceptance with restriction on response
P25_103	PACKET/FACILITY/PROPER/P03	0455	Verify the IUT accepts a Call Accept with user data, no restriction on response
P25_104	PACKET/FACILITY/PROPER/P04	0456	Verify the IUT supports a Clear Indication with user data <= 128 octets, no restriction on response
P25_105	PACKET/FACILITY/PROPER/P05	0457	Verify the IUT can handle a Call Request and Clear Request

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
P25_106	PACKET/FACILITY/PROPER/P06	0458	exchange with user data, restriction on response is supported
P25_107	PACKET/FACILITY/PROPER/P07	0459	Verify the IUT Clears a Call Connected packet with user data when restriction on response is in effect
P25_108	PACKET/FACILITY/PROPER/P08	0460	Verify the IUT supports an Incoming Call with default throughput class
P25_109	PACKET/FACILITY/PROPER/P09	0461	Verify the IUT supports a Call Request with default throughput class
P25_110	PACKET/FACILITY/PROPER/P10	0462	Verify the IUT supports an Incoming Call with default packet size
P25_111	PACKET/FACILITY/PROPER/P11	0462	Verify the IUT supports an Incoming Call with default window size
P25_112	PACKET/FACILITY/PROPER/P12	0463	Verify IUT supports an Incoming Call with Transit Delay indication
P25_113	PACKET/FACILITY/PROPER/P13	0463	Verify IUT accepts an Incoming Call with Closed User Group < 100
P25_114	PACKET/FACILITY/PROPER/P14	0463	Verify the IUT accepts an Incoming Call with CUG > 99 and CUG < 10000
P25_115	PACKET/FACILITY/PROPER/P15	0464	Verify the IUT accepts a Call with Bilateral CUG
P25_116	PACKET/FACILITY/PROPER/P16	0464	Verify the IUT accepts a call with Reverse Charging facility
P25_201	PACKET/FACILITY/IMPROPER/P01	0465	Verify the IUT accepts a call using the CCITT-Specified DTE Calling and Called Address Extension Facility
P25_202	PACKET/FACILITY/IMPROPER/P02	0466	Verify the IUT Clears an Incoming Call packet with facility length greater than 109.
P25_203	PACKET/FACILITY/IMPROPER/P03	0467	Verify the IUT Clears an Incoming Call packet with no facility field
P25_204	PACKET/FACILITY/IMPROPER/P04	0468	Verify the IUT Clears an Incoming Call packet with facility parameter not allowed
P25_205	PACKET/FACILITY/IMPROPER/P05	0469	Verify the IUT Clears an Incoming Call packet with call duration
P25_206	PACKET/FACILITY/IMPROPER/P06	0470	Verify the IUT Clears a Call Connected packet containing Closed User Group (CUG)
		0471	Verify the IUT Clears a Clear Indication containing flow

Continued on next page

..... Continued from previous page .

Test Case Id. #	Test Case Reference	Page	Description
P25_207 #	PACKET/FACILITY/IMPROPER/P07	0472	control parameter negotiation Verify the IUT Clears an Incoming Call packet with facilities length shorter than specified, answer initial Clear with a Clear Confirm with Reverse Charging facility.
P25_208 #	PACKET/FACILITY/IMPROPER/P08	0473	Verify the IUT Clears an Incoming Call with facility code 'FE'H
P25_209 #	PACKET/FACILITY/IMPROPER/P09	0474	Verify the IUT clears a Clear Indication with facility code 'FE'H
P26_101 #	PACKET/REG/PROPER/P01	0476	Verify the IUT registers D-BIT modification
P26_102 #	PACKET/REG/PROPER/P02	0477	Verify the IUT registers Packet Retransmission
P26_103 #	PACKET/REG/PROPER/P03	0478	Verify the IUT registers Extended Packet sequence numbering
P26_104 #	PACKET/REG/PROPER/P04	0479	Verify the IUT supports the Charging Information Facility (Per-Interface basis)
P26_105 #	PACKET/REG/PROPER/P05	0480	Verify the IUT registers Throughput class negotiation
P26_106 #	PACKET/REG/PROPER/P06	0481	Verify the IUT registers Flow Control negotiation
P26_107 #	PACKET/REG/PROPER/P07	0482	Verify the IUT registers Reverse Charging facility
P26_108 #	PACKET/REG/PROPER/P08	0483	Verify the IUT registers Fast Select acceptance
P26_109 #	PACKET/REG/PROPER/P09	0484	Verify the IUT registers outgoing calls barred facility
P26_110 #	PACKET/REG/PROPER/P10	0485	Verify the IUT registers Incoming Calls Barred
P26_111 #	PACKET/REG/PROPER/P11	0486	Verify the IUT registers Default Throughput Class
P26_112 #	PACKET/REG/PROPER/P12	0487	Verify the IUT registers Non-standard Default Packet Size
P26_113 #	PACKET/REG/PROPER/P13	0488	Verify the IUT registers Nonstandard Default Window size
P27_101 #	PACKET/LCI/PROPER/P01	0490	Verify the IUT can set up simultaneous calls.
P27_102 #	PACKET/LCI/PROPER/P02	0492	Verify the IUT can set up and clear simultaneous calls
P27_103 #	PACKET/LCI/PROPER/P03	0494	Verify the IUT can accept simultaneous calls
P28_101 #	PACKET/DTE/PROPER/P01	0496	Verify the IUT acts as a DTE during call collision
P28_102 #	PACKET/DTE/PROPER/P02	0497	Verify the IUT acts as a DCE when sent a Restart with Cause Code DTE originated
P28_103 #	PACKET/DTE/PROPER/P03	0498	Verify the IUT can handle a Restart collision with a Restart containing Cause Code DTE originated
P28_104 #	PACKET/DTE/PROPER/P04	0499	Verify the IUT acting as a DTE Clears a Call packet with a facility code not applicable to DTE/DTE operation

Continued on next page

..... Continued from previous page.

Test Case Id.	Test Case Reference	Page	Description
P28_105 #	PACKET/DTE/PROPER/P05	0500	Verify the IUT acting as a DTE accepts a Registration Request and issues a Restart Request
P28_106 #	PACKET/DTE/PROPER/P06	0501	Verify the IUT acting as a DTE handles Registration Request collision
P28_107 #	PACKET/DTE/PROPER/P07	0502	Verify the IUT retransmits a Data packet upon receipt of a Reject Request
P28_108 #	PACKET/DTE/PROPER/P08	0503	Verify the IUT acting as a DCE accepts a Clear with cause code DTE originated
Test Step Identifier	Test Step Reference	Page	Description
ASSIGN_DCE (TYPE : #INTEGER)	PACKET/ASSIGN_DCE	0504	Assign a value to the test case variables LC, LCGN, LCN based on the requested Logical Channel TYPE.
ASSIGN_DTE (TYPE : #INTEGER)	PACKET/ASSIGN_DTE	0506	Assign a value to the test case variables LC, LCGN, LCN based on the requested Logical Channel TYPE. Assignment is done as if the tester were acting as a DTE.
CLR_UNEXPECTED	PACKET/CLR_UNEXPECTED	0507	Handle an unexpected Clear packet
D_STATE_CLR #	PACKET/D_STATE_CLR	0508	When a Clear is received from an IUT in a D state (D1, D2, D3, I1, I2, J1, J2, F1, F2) the verification step must use R1_POSTAMBLE
D_STATE_RES #	PACKET/D_STATE_RES	0508	When a Restart is received from an IUT in a D state (D1, D2, D3, I1, I2, J1, J2, F1, F2) the verification step uses R1_POSTAMBLE if the Logical Channel is a VC or D1_POSTAMBLE if the Logical Channel is a PVC.
D1_UNEXPECTED #	PACKET/D1_UNEXPECTED	0509	Handle any acceptable but unexpected packets received from the IUT while in state D1, (Reset and Reject excluded).
D1A_UNEXPECTED #	PACKET/D1A_UNEXPECTED	0509	Handle any acceptable but unexpected packets received from the IUT while in Data Transfer (D1).
D1B_UNEXPECTED #	PACKET/D1B_UNEXPECTED	0510	Handle any acceptable but unexpected packets received from the IUT while in Data Transfer (D1), (Interrupt excluded)
D1C_UNEXPECTED #	PACKET/D1C_UNEXPECTED	0510	Handle any acceptable but unexpected packets received while the IUT is in Data Transfer (D1), (Reset excluded).

Continued on next page

..... Continued from previous page.

Test Step Identifier	Test/Step Reference	Page	Description
D1_POSTAMBLE	PACKET/D1_POSTAMBLE	0511	Verify the IUT is in state D1
D1_PVC_PREAMBLE	PACKET/D1_PVC_PREAMBLE	0512	Put the IUT into state D1, only used for PVC logical channels.
D2_POSTAMBLE	PACKET/D2_POSTAMBLE	0513	Verify the IUT is in state D2
D2_PREAMBLE	PACKET/D2_PREAMBLE	0513	Put the IUT into state D2 DTE Reset Request.
D3_UNEXPECTED	PACKET/D3_UNEXPECTED	0514	Handles any unexpected responses from the IUT immediately after the IUT has been put into state D3. State D3 DXE Reset Request is a transient state.
EXCH_DAT_EMPTY	PACKET/EXCH_DAT_EMPTY	0515	Send the IUT the sequence of Data packets defined in PIXIT question 2.14 in order to test for the handling of an empty Data packet.
EXCH_DAT (COUNT : INTEGER)	PACKET/EXCH_DAT	0516	If the IUT can receive and transmit data then send one data packet to the IUT and request the IUT to send one data packet. If the IUT is a send only IUT then request the IUT to send one data packet. If the IUT is a receive only IUT then send the IUT one data packet.
EXCH_DAT_MBIT (COUNT : INTEGER)	PACKET/EXCH_DAT_MBIT	0517	Send the IUT the sequence of Data packets defined in PIXIT question 2.15 in order to test for support of the M-bit.
EXCH_DAT_NOACK	PACKET/EXCH_DAT_NOACK	0518	If the IUT can receive and transmit data then send one data packet to the IUT and request the IUT to send one data packet. If the IUT is a send only IUT then request the IUT to send one data packet. Do not acknowledge receipt of Data packets from the IUT.
EXCH_DAT_QBIT (COUNT : INTEGER)	PACKET/EXCH_DAT_QBIT	0519	Send the IUT the sequence of Data packets defined in PIXIT question 2.12 in order to test for correct error handling of a changing Q-bit.
EXCH_DAT_QBIT_A	PACKET/EXCH_DAT_QBIT_A	0520	Send the IUT the sequence of Data packets defined in PIXIT question 2.13 in order to test for support of the Q-bit.
(COUNT : INTEGER)	PACKET/GEN1_POSTAMBLE	0520	General postamble used after receipt of a CLEAR from the IUT.
GEN1_POSTAMBLE	PACKET/GEN2_POSTAMBLE	0521	General postamble used after the receipt of a RESTART from the IUT.
GEN2_POSTAMBLE	PACKET/INITDTE	0521	Put the IUT into state R1
INITDTE	PACKET/IUT_TX_DATA	0521	Request the IUT to transmit one Data packet.
IUT_TX_DATA			

Continued on next page

..... Continued from previous page.

Test Step Identifier	Test Step Reference	Page	Description
J2_UNEXPECTED	PACKET/J2_UNEXPECTED	0522	Handle unexpected packets from the IUT while in state J2.
LC_VERIFY (LC : #INTEGER)	PACKET/LC_VERIFY	0522	Verify that the received logical channel is not already in use.
P1_INOPP #	PACKET/P1_INOPP	0523	Handles the response to INOPPORTUNE packets sent to the IUT while in state P1. Used in test cases 4_301 through 4_310
P1_PREAMBLE (TYPE : #INTEGER)	PACKET/P1_PREAMBLE	0524	Put the IUT in state P1
P2_INOPP #	PACKET/P2_INOPP	0525	Handles the response to inopportune packets sent to the IUT while in state P2.
P2_POSTAMBLE	PACKET/P2_POSTAMBLE	0525	Verify the IUT is in state P2
P2_PREAMBLE	PACKET/P2_PREAMBLE	0526	Put the specified channel in DTE Call Request state P2
P3_INOPP #	PACKET/P3_INOPP	0000	Handles the response to inopportune packets sent to the IUT while in state P3.
P3_UNEXPECTED #	PACKET/P3_UNEXPECTED	0527	Handle unexpected packets received from the IUT while in state P3. Cancel all running timers.
P4_POSTAMBLE #	PACKET/P4_POSTAMBLE	0527	Verify the IUT is in state P4. P4_POSTAMBLE leaves the IUT in state R1.
P4D1_PREAMBLE	PACKET/P4D1_PREAMBLE	0528	Put the Logical Channel in to the Data Transfer state P4 (D1)
P4D1_PREAMBLE_A #	PACKET/P4D1_PREAMBLE_A	0531	Put the Logical Channel in to the Data Transfer state P4 (D1), but do not negotiate use of Delivery Confirmation
P5_INOPP #	PACKET/P5_INOPP	0533	Handles the response to inopportune packets sent to the IUT while in state P5.
P5_PREAMBLE	PACKET/P5_PREAMBLE	0534	Put the IUT in the Call Collision state P5
P6_POSTAMBLE #	PACKET/P6_POSTAMBLE	0535	Verify the IUT is in state P6 after the test body has successfully completed
P6_PREAMBLE	PACKET/P6_PREAMBLE	0535	Put the channel (LCI) in state P6 DTE Clear Request
P7_UNEXPECTED #	PACKET/P7_UNEXPECTED	0536	Handles any unexpected responses from the IUT immediately after the IUT has been put in state P7.
R1_POSTAMBLE	PACKET/R1_POSTAMBLE	0537	Verify the IUT is in state R1 for VCs and D1 for PVCs.
R1_PREAMBLE (TYPE : #INTEGER) #	PACKET/R1_PREAMBLE	0538	Put the IUT into state R1 Ready and assign a logical channel to the Test Case variable LC based on the type of logical channel requested in the "type" parameter.

Continued on next page

..... Continued from previous page.

Test Step Identifier	Test Step Reference	Page	Description
R2_POSTAMBLE #	PACKET/R2_POSTAMBLE	0539	For test cases that leave the IUT in state R2 after the test body has completed R2_POSTAMBLE, will move the IUT to the stable state R1
R2_PREAMBLE #	PACKET/R2_PREAMBLE	0539	Put the IUT into state R2
R3_UNEXPECTED #	PACKET/R3_UNEXPECTED	0539	Handle unexpected packets from the IUT received while the IUT is in state R3 (DXE Restart Request).
RSET_UNEXPECTED #	PACKET/RSET_UNEXPECTED	0540	Handle an unexpected Reset packet
RSTRT_UNEXPECTED #	PACKET/RSTRT_UNEXPECTED	0540	An unexpected Restart Request will be responded to with a Restart Confirmation and the test case will give an Inconclusive verdict
RX_DATA #	PACKET/RX_DATA	0541	Wait for one or more Data packets to arrive from the IUT or the expiration of timer TDD, discard any RR's received before the Data packet arrives
RX_INTERRUPT #	PACKET/RX_INTERRUPT	0542	Receive an Interrupt packet of length 1 to 32 octets based on type of IUT
TX_DATA (I : #INTEGER)	PACKET/TX_DATA	0544	Transmit a Data packet to the IUT
TX_DATA_EMPTY (I : #INTEGER)	PACKET/TX_DATA_EMPTY	0545	Transmit a Data packet to the IUT
TX_DATA_MBIT (I : #INTEGER)	PACKET/TX_DATA_MBIT	0546	Transmit a Data packet to the IUT from the user supplied Data packets for testing M-bit support; PIXIT question 2.15
TX_DATA_NOACK (I : #INTEGER)	PACKET/TX_DATA_NOACK	0547	Transmit a Data packet to the IUT but do not acknowledge any received data packets.
TX_DATA_QBIT (I : #INTEGER)	PACKET/TX_DATA_QBIT	0548	Transmit a Data packet to the IUT from the user supplied Data packets for testing Q-bit error handling.
TX_DATA_QBIT_A (I : #INTEGER)	PACKET/TX_DATA_QBIT_A	0549	Transmit a Data packet to the IUT from the user supplied Data packets for testing Q-bit support.
Default Identifier	Default Reference	Page	Description

User Type Definitions			
Name	Base Type	Definition	Comments
INT_ARRAY # # # #	INTEGER	{1.. SIM_CALL_OUT}	an array of integers used to store the active logical channel numbers. See PLG 27 and LC_VERIFY. The notation { } is not defined in ISO DIS 9646-3.

User Operation Definition	
Operation Name: GET_LCGN (LOG_CHAN_ID : INTEGER[12])	Result Type : BITSTRING[4]
Description	
GET_LCGN (LOG_CHAN_ID : INTEGER[12]) extracts the LCGN from the Logical #Channel Identifier.	
As an example: if the Logical Channel Identifier passed in is 129 #('000100000001'B) the returned value from GET_LCGN would be '0001'B the #highorder four bits.	

User Operation Definition	
Operation Name: GET_LCN (LOG_CHAN_ID : INTEGER[12])	Result Type : BITSTRING[8]
Description	
GET_LCN (LOG_CHAN_ID : INTEGER[12]) extracts the LCN from the passed in #LCI	
Extracts the Logical Channel Number, low order eight bits from the Logical #Channel Identifier, returning the LCN. For example: if the LOG_CHAN_ID is #129 ('000100000001'B) the returned value would be one, equivalent to #'00000001'B.	

User Operation Definition
Operation Name: GET_LCI (LCGN : BITSTRING[4] ; LCN : BITSTRING[8]) Result Type : INTEGER
Description
GET_LCI (LCGN : BITSTRING ; LCN : BITSTRING) constructs the LCI from the #Logical Channel Group Number and Logical Channel Number. As an example: if the parameter passed in as the LCGN has the value '0001'B #and the parameter passed as the LCN is has the value '00000001'B the #resulting value would be the concatenation of the 4 bits from the LCGN to #the high order end of the LCN resulting in a bitstring value of #'000100000001'B which is then converted to an integer (for this example #129) and returned.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Suite Parameters			
Name	Type	PICS/PIXIT Ref.	Comments
CCITT_80	BOOLEAN	PIXIT 1.1	IUT is to be tested to CCITT X.25 1980
CCITT_84	BOOLEAN	PIXIT 1.1	IUT is to be tested to CCITT X.25 1984
ISO	BOOLEAN	PIXIT 1.1	IUT is to be tested to ISO 8208
IUT_TX	BOOLEAN	PIXIT 1.2a	IUT is capable of sending data
IUT_RX	BOOLEAN	PIXIT 1.2b	IUT is capable of receiving data
LPV	INTEGER	PIXIT 1.3	Low PVC LCI
HPV	INTEGER	PIXIT 1.3	High PVC LCI
LIC	INTEGER	PIXIT 1.4a	Low Incoming LCI
HIC	INTEGER	PIXIT 1.4a	High Incoming LCI
LOC	INTEGER	PIXIT 1.4b	Low Outgoing LCI
HOC	INTEGER	PIXIT 1.4b	High Outgoing LCI
LTC	INTEGER	PIXIT 1.4c	Low Two-way LCI
HTC	INTEGER	PIXIT 1.4c	High Two-way LCI
LCI_UNDER_TEST	INTEGER	PIXIT 1.5	Logical Channel Under Test
LUC	INTEGER	PIXIT 1.6	Unassigned Logical Channel
SIM_CALL_IN	INTEGER	PIXIT 1.7	Simultaneous incoming calls
SIM_CALL_OUT	INTEGER	PIXIT 1.8	Simultaneous outgoing calls
DEF_WIN_SZ	INTEGER	PIXIT 1.9a	Default window size
NS_DEF_WIN_SZ	HEXSTRING[2]	PIXIT 1.9b	Nonstandard default window size
NS_DEF_WIN_SZ_NUM	INTEGER	PIXIT 1.9c	Used in P26_113
NS_DEF_PKT_SZ	HEXSTRING[2]	PIXIT 1.10	Nonstandard default packet size
MAX_PKT_SZ	INTEGER	PIXIT 1.11	
SEQ_MODULO	INTEGER	PIXIT 1.12	the sequence modulo used for testing
DISC_AT_DL	BOOLEAN	PIXIT 1.13	
REPLY_REQUIRED	BOOLEAN	PIXIT 1.14	
FIRST_DATA_FROM_IUT	BOOLEAN	PIXIT 1.15	
TR_DELAY	INTEGER	PIXIT 1.18a	
TC_DELAY	INTEGER	PIXIT 1.18b	
TS_DELAY	INTEGER	PIXIT 1.18c	
T20	INTEGER	PIXIT 1.19	
T21	INTEGER	PIXIT 1.19	

Continued on next page

..... Continued from previous page.


Name	Type	PICS/PIXIT Ref.	Comments
T22	INTEGER	PIXIT 1.19	
T23	INTEGER	PIXIT 1.19	
T24	INTEGER	PIXIT 1.19	
T25	INTEGER	PIXIT 1.19	
T26	INTEGER	PIXIT 1.19	
T27	INTEGER	PIXIT 1.19	
T28	INTEGER	PIXIT 1.19	
TD_RESPONSE	INTEGER	PIXIT 1.20	
TDELTA	INTEGER	PIXIT 1.21	
TO_DELAY_R3_MIN	INTEGER	PIXIT 1.22	
TO_DELAY_R3_MAX	INTEGER	PIXIT 1.22	
TO_DELAY_P3_MIN	INTEGER	PIXIT 1.22	
TO_DELAY_P3_MAX	INTEGER	PIXIT 1.22	
TO_DELAY_D3_MIN	INTEGER	PIXIT 1.22	
TO_DELAY_D3_MAX	INTEGER	PIXIT 1.22	
TO_DELAY_P7_MIN	INTEGER	PIXIT 1.22	
TO_DELAY_P7_MAX	INTEGER	PIXIT 1.22	
TO_DELAY_J2_MIN	INTEGER	PIXIT 1.22	
TO_DELAY_J2_MAX	INTEGER	PIXIT 1.22	
TD_WAIT_TIME	INTEGER	PIXIT 1.23	
TST_ADDR_INV	OCTETSTRING	PIXIT 2.1b	
TST_ADDR_INVL	INTEGER	PIXIT 2.1b	
IUT_ADDR_INV	OCTETSTRING	PIXIT 2.1d	
IUT_ADDR_INVL	INTEGER	PIXIT 2.1d	
TST_ADDR1	OCTETSTRING	PIXIT 2.2a	
TST_ADDR1_L	INTEGER	PIXIT 2.2a	
TST_ADDR2	OCTETSTRING	PIXIT 2.2b	
TST_ADDR2_L	INTEGER	PIXIT 2.2b	
IUT_ADDR1	OCTETSTRING	PIXIT 2.2a	
IUT_ADDR1_L	INTEGER	PIXIT 2.2a	
IUT_ADDR2	OCTETSTRING	PIXIT 2.2b	
IUT_ADDR2_L	INTEGER	PIXIT 2.2b	

Continued on next page

..... Continued from previous page.

Name	Type	PICS/PIXIT Ref.	Comments
IUT_ADDR5	OCTETSTRING	PIXIT 2.3a	
IUT_ADDR5_L	INTEGER	PIXIT 2.3a	
IUT_ADDR6	OCTETSTRING	PIXIT 2.3b	
IUT_ADDR6_L	INTEGER	PIXIT 2.3b	
TST_ADDR5	OCTETSTRING	PIXIT 2.3a	
TST_ADDR5_L	INTEGER	PIXIT 2.3a	
TST_ADDR6	OCTETSTRING	PIXIT 2.3b	
TST_ADDR6_L	INTEGER	PIXIT 2.3b	
IUT_ADDR_MAX	OCTETSTRING	PIXIT 2.4	
IUT_ADDR_MAXL	INTEGER	PIXIT 2.4	
TST_AF	OCTETSTRING	PIXIT 2.5a	
IUT_AF	OCTETSTRING	PIXIT 2.5a	
TST_AF_L	INTEGER	PIXIT 2.5a	
IUT_AF_L	INTEGER	PIXIT 2.5a	
F_NONX25	OCTETSTRING	PIXIT 2.5b	
F_NONX25_L	INTEGER	PIXIT 2.5b	
F_AE	OCTETSTRING	PIXIT 2.5c	
F_AE_L	INTEGER	PIXIT 2.5c	
FAST_SELECT	BOOLEAN	PIXIT 2.6a / PICS SP 1b-2e,	
#		3b-4e	
FACS_110	OCTETSTRING[110]	PIXIT 2.6d	
CALL_IND_F	OCTETSTRING	PIXIT 2.7a	
CALL_IND_FL	OCTETSTRING	PIXIT 2.7a	
CALL_IND_UD	OCTETSTRING	PIXIT 2.7a	
CALL_REQ_F	OCTETSTRING	PIXIT 2.7b	
CALL_REQ_FL	OCTETSTRING	PIXIT 2.7b	
CALL_REQ_UD	OCTETSTRING	PIXIT 2.7b	
CALL_CON_F	OCTETSTRING	PIXIT 2.7c	
CALL_CON_FL	OCTETSTRING	PIXIT 2.7c	
CALL_CON_UD	OCTETSTRING	PIXIT 2.7c	
CALL_ACC_F	OCTETSTRING	PIXIT 2.7d	

Continued on next page

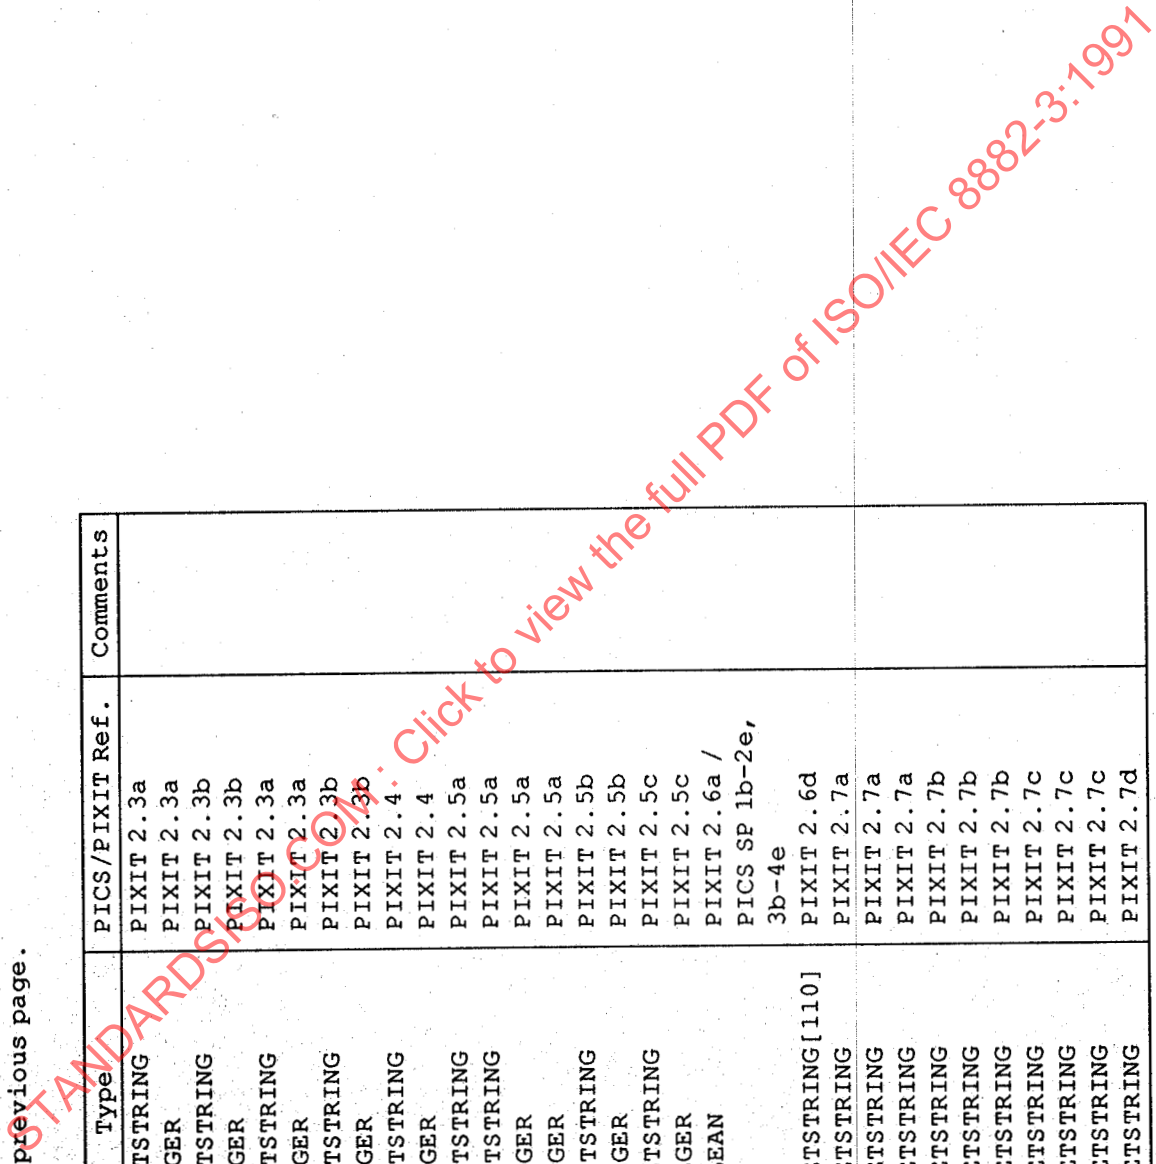

..... Continued from previous page.

Name	Type	PICS/PIXIT Ref.	Comments
CALL_ACC_FL	OCTETSTRING	PIXIT 2.7d	
CALL_ACC_UD	OCTETSTRING	PIXIT 2.7d	
CLR_IND_F	OCTETSTRING	PIXIT 2.7e	
CLR_IND_FL	OCTETSTRING	PIXIT 2.7e	
CLR_IND_UD	OCTETSTRING	PIXIT 2.7e	
CLR_REQ_F	OCTETSTRING	PIXIT 2.7f	
CLR_REQ_FL	OCTETSTRING	PIXIT 2.7f	
CLR_REQ_UD	OCTETSTRING	PIXIT 2.7f	
CLC_RX_F	OCTETSTRING	PIXIT 2.7g	
CLC_RX_FL	OCTETSTRING	PIXIT 2.7g	
CLC_TX_F	OCTETSTRING	PIXIT 2.7h	
CLC_TX_FL	OCTETSTRING	PIXIT 2.7h	
BCUG_NUM	INTEGER	PIXIT 2.8a	
ECUG_NUM	INTEGER	PIXIT 2.8b	
BICUG_NUM	INTEGER	PIXIT 2.8c	
DEF_THRUPT	OCTETSTRING	PIXIT 2.9	
THRUPT	OCTETSTRING	PIXIT 2.10	
TRNS_DELAY_1	BITSTRING[8]	PIXIT 2.11	Transit Delay first octet
TRNS_DELAY_2	BITSTRING[8]	PIXIT 2.11	Transit Delay second octet
F_NUI	OCTETSTRING	PIXIT 2.12	
F_NUI_L	INTEGER	PIXIT 2.12	
Q	BITSTRING[1]	PIXIT 2.13 -	value given in PIXIT for each user defined Data packet
#		2.18	
D	BITSTRING[1]	PIXIT 2.13 -	value given in PIXIT for each user defined data
#		2.18	
M	BITSTRING[1]	PIXIT 2.13 -	value given in PIXIT for each user defined data
#		2.18	
UD_0	OCTETSTRING	PIXIT 2.13	
UD_1	OCTETSTRING	PIXIT 2.13	
UD_2	OCTETSTRING	PIXIT 2.13	
UD_3	OCTETSTRING	PIXIT 2.13	
UD_4	OCTETSTRING	PIXIT 2.13	

Continued on next page

..... Continued from previous page.

Name	Type	PICS/PIXIT Ref.	Comments
UD_5	OCTETSTRING	PIXIT 2.13	universally applicable data packet
UD_6	OCTETSTRING	PIXIT 2.13	
UD_7	OCTETSTRING	PIXIT 2.13	
UD_8	OCTETSTRING	PIXIT 2.13	
UD_U	OCTETSTRING	PIXIT 2.13	
UDQ0	OCTETSTRING	PIXIT 2.14	
UDQ1	OCTETSTRING	PIXIT 2.14	
UDQ2	OCTETSTRING	PIXIT 2.14	
UDQ3	OCTETSTRING	PIXIT 2.14	
UDQ4	OCTETSTRING	PIXIT 2.14	
UDQ5	OCTETSTRING	PIXIT 2.14	
UDQ6	OCTETSTRING	PIXIT 2.14	
UDQ7	OCTETSTRING	PIXIT 2.14	
UDQ8	OCTETSTRING	PIXIT 2.14	
UDQ0A	OCTETSTRING	PIXIT 2.15	
UDQ1A	OCTETSTRING	PIXIT 2.15	
UDQ2A	OCTETSTRING	PIXIT 2.15	
UDQ3A	OCTETSTRING	PIXIT 2.15	
UDQ4A	OCTETSTRING	PIXIT 2.15	
UDQ5A	OCTETSTRING	PIXIT 2.15	
UDQ6A	OCTETSTRING	PIXIT 2.15	
UDQ7A	OCTETSTRING	PIXIT 2.15	
UDQ8A	OCTETSTRING	PIXIT 2.15	
UDE0	OCTETSTRING	PIXIT 2.16	
UDE1	OCTETSTRING	PIXIT 2.16	
UDE2	OCTETSTRING	PIXIT 2.16	
UDE3	OCTETSTRING	PIXIT 2.16	
UDE4	OCTETSTRING	PIXIT 2.16	
UDE5	OCTETSTRING	PIXIT 2.16	
UDE6	OCTETSTRING	PIXIT 2.16	
UDE7	OCTETSTRING	PIXIT 2.16	
UDE8	OCTETSTRING	PIXIT 2.16	

Continued on next page

..... Continued from previous page.

Name	Type	PICS/PIXIT Ref.	Comments
UDM0	OCTETSTRING	PIXIT 2.17	
UDM1	OCTETSTRING	PIXIT 2.17	
UDM2	OCTETSTRING	PIXIT 2.17	
UDM3	OCTETSTRING	PIXIT 2.17	
UDM4	OCTETSTRING	PIXIT 2.17	
UDM5	OCTETSTRING	PIXIT 2.17	
UDM6	OCTETSTRING	PIXIT 2.17	
UDM7	OCTETSTRING	PIXIT 2.17	
UDM8	OCTETSTRING	PIXIT 2.17	
UDMP	OCTETSTRING	PIXIT 2.18	
UD1	OCTETSTRING	PIXIT 2.19	
UD3	OCTETSTRING	PIXIT 2.19	
UD16	OCTETSTRING	PIXIT 2.19	
UD17	OCTETSTRING	PIXIT 2.19	
UD32	OCTETSTRING	PIXIT 2.19	
UD110	OCTETSTRING	PIXIT 2.19	
UD128	OCTETSTRING	PIXIT 2.19	
UD129	OCTETSTRING	PIXIT 2.19	
UDNS	OCTETSTRING	PIXIT 2.19	
UD_I_IUT	OCTETSTRING	PIXIT 2.20	
UD_I_TST	OCTETSTRING	PIXIT 2.20	
D_BIT_SUPP	BOOLEAN	PICS DCN1 DCN2	Delivery Confirmation Supported
REJ_SUPP	BOOLEAN	PICS DR6	Packet Retransmission Supported
CLR_ON_ERR_R	BOOLEAN	PICS W2s	IUT Clears on ERROR-R (Clear instead of Reset)
RST_ON_ERR_R	BOOLEAN	PICS W2s	IUT Restarts on ERROR-R (Restart instead of Reset)
RST_ON_ERR_C	BOOLEAN	PICS W1	IUT Restarts on ERROR-C (Restart instead of Clear)
RST_ON_ERR_R_PVC	BOOLEAN	PICS W2p	IUT Restarts on ERROR-R
IUT_ACTS_DCE	BOOLEAN	PICS Et/c	DTE/DTE testing the IUT is a DCE
IUT_ACTS_DTE	BOOLEAN	PICS Et/t	DTE/DTE testing the IUT is a DTE
IUT_DYNAMIC	BOOLEAN	PICS Et/d	DTE/DTE testing the IUT is dynamic in its role

STANDARDSON.COM: Click to view the full PDF of ISO 8882-3:1991

Test Suite Constants			
Name	Type	Value	Comments
GFI_B	BITSTRING	'01'B	basic format PDU
GFI_X	BITSTRING	'10'B	extended format PDU
TVC	INTEGER	1	Two-way logical channel
PVC	INTEGER	2	Permanent Virtual Circuit
IVC	INTEGER	3	Incoming Virtual Call
OVC	INTEGER	4	Outgoing Virtual Call
UVC	INTEGER	5	Undefined Logical Channel
TVC_OR_IVC	INTEGER	6	Two-way or Incoming
TVC_OR_OVC	INTEGER	7	Two-way or Outgoing
SVC	INTEGER	8	Two-way, Incoming or Outgoing VC
ANY_VC	INTEGER	9	Any VC or PVC
NO_LC	INTEGER	10	no logical channel
NULL	INTEGER	'FFFFFF'	a value never used in the test suite
#		H	

Test Suite Variables			
Name	Type	Value	Comments
FIRST_TEST	BOOLEAN	TRUE	

Test Case Variables			
Name	Type	Value	Comments
COUNT	INTEGER	0	working integer variable
COUNT1	INTEGER	0	counter
D_BIT_IN_USE	BOOLEAN	FALSE	
GF	INTEGER	0	counter used to increment the GFI
I	INTEGER	0	working integer variable
LC	INTEGER	0	3 semi-octets containing the LCGN
#			and LCN used to form the LCI
LCGN	BITSTRING[4]	'0000'B	the Logical Channel Group Number
LCN	BITSTRING[8]	'00000000'B	the Logical Channel Number
LCI_ACTIVE	INT_ARRAY	0	initialize all entries in
#			LCI_ACTIVE to 0
PS	INTEGER	0	the P(S)
PT	INTEGER	0	the trailing window edge
PR	INTEGER	0	the P(R)
TEMP	BITSTRING[1]	'0'B	

PCO Type Declarations			
Name	Type	Role	Comments
L # # # #	LSAP	LT	LSAP is the Link Service Access Point. For the Tester the Point of Control and Observation for Protocol Data Units and Packet Level services received from the IUT.

Timer Declarations			
Timer Name	Duration	Units	Comments
TR	TR_DELAY	sec	PIXIT 1.18a
TC	TC_DELAY	sec	PIXIT 1.18b
TS	TS_DELAY	sec	PIXIT 1.18c
TT20	T20	sec	PIXIT 1.19
TT21	T21	sec	PIXIT 1.19
TT22	T22	sec	PIXIT 1.19
TT23	T23	sec	PIXIT 1.19
TT24	T24	sec	PIXIT 1.19
TT25	T25	sec	PIXIT 1.19
TT26	T26	sec	PIXIT 1.19
TT27	T27	sec	PIXIT 1.19
TT28	T28	sec	PIXIT 1.19
TD_RESP	TD_RESPONSE	sec	PIXIT 1.20
TDEL	TDELTA	sec	PIXIT 1.21
TO_R3	TO_DELAY_R3_MIN	sec	PIXIT 1.22
TO_P3	TO_DELAY_P3_MIN	sec	PIXIT 1.22
TO_P7	TO_DELAY_P7_MIN	sec	PIXIT 1.22
TO_D3	TO_DELAY_D3_MIN	sec	PIXIT 1.22
TO_J2	TO_DELAY_J2_MIN	sec	PIXIT 1.22
TD	TD_WAIT_TIME	sec	PIXIT 1.23

Abbreviation Declarations		
Abbreviation	Expansion	Comments
BS	BITSTRING	abbreviation of BITSTRING used in constraints
#		
CAUSE_EQ_0	(CAUSE = 0)	cause code field of the pdu is 0
CAUSE_EQ_128	(CAUSE = 128)	cause code field of the pdu is 128
CAUSE_LT_128	(CAUSE < 128)	cause code field of the pdu has a value between 0 and 127
#		
CAUSE_GE_128	(CAUSE >= 128)	cause code field of the pdu has a value greater than or equal to 128
#		
CAUSE_NOT_0	(CAUSE <> 0)	
CAUSE_NOT_128	(CAUSE <> 128)	
DIAG0	(DIAG = 0)	no additional information
DIAG1	(DIAG = 1)	; invalid P(S)
DIAG2	(DIAG = 2)	; invalid P(R)
DIAG16	(DIAG = 16)	packet type invalid
DIAG17	(DIAG = 17)	; packet type invalid for state r1
DIAG19	(DIAG = 19)	; packet type invalid for state r3
DIAG20	(DIAG = 20)	; packet type invalid for state p1
DIAG21	(DIAG = 21)	; packet type invalid for state p2
DIAG22	(DIAG = 22)	; packet type invalid for state p3
DIAG23	(DIAG = 23)	; packet type invalid for state p4
DIAG24	(DIAG = 24)	; packet type invalid for state p5
DIAG25	(DIAG = 25)	; packet type invalid for state p6
DIAG26	(DIAG = 26)	; packet type invalid for state p7
DIAG27	(DIAG = 27)	; packet type invalid for state d1
DIAG29	(DIAG = 29)	; packet type invalid for state d3
DIAG32	(DIAG = 32)	packet not allowed
DIAG33	(DIAG = 33)	; unidentifiable packet
DIAG35	(DIAG = 35)	; invalid packet type on a PVC
DIAG36	(DIAG = 36)	; packet on unassigned logical channel
DIAG38	(DIAG = 38)	; packet too short
DIAG39	(DIAG = 39)	; packet too long
DIAG41	(DIAG = 41)	; restart or registration packet with nonzero LCI
#		
DIAG42	(DIAG = 42)	; unauthorized Interrupt Confirmation
DIAG43	(DIAG = 43)	; unauthorized Interrupt Confirmation
DIAG44	(DIAG = 44)	; unauthorized Interrupt
DIAG48	(DIAG = 48)	Timer Expired; for Incoming Call/Call Request
#		
DIAG49	(DIAG = 49)	; for Incoming Call
DIAG50	(DIAG = 50)	; for Clear Indication
DIAG51	(DIAG = 51)	; for Reset Indication
DIAG52	(DIAG = 52)	; for Restart Indication
DIAG64	(DIAG = 64)	Call Setup, Call Clearing, or Registration Problem
#		
DIAG65	(DIAG = 65)	; facility/registration code not

Continued on next page

..... Continued from previous page.

Abbreviation	Expansion	Comments
#		allowed
DIAG66	(DIAG = 66)	; facility parameter not allowed
DIAG67	(DIAG = 67)	; invalid called DTE address
DIAG68	(DIAG = 68)	; invalid calling DTE address
DIAG69	(DIAG = 69)	; invalid facility/registration length
DIAG80	(DIAG = 80)	miscellaneous
DIAG83	(DIAG = 83)	; inconsistent Q-bit settings
DIAG144	(DIAG = 144)	Timer expired or retransmission count surpassed
#		
DIAG145	(DIAG = 145)	; for interrupt
DIAG147	(DIAG = 147)	; for reject
DIAG160	(DIAG = 160)	DTE-Specific Signals
DIAG165	(DIAG = 165)	; invalid partially full Data packet
DIAG166	(DIAG = 166)	; D-bit procedure not supported
DIAG167	(DIAG = 167)	; Registration/Cancellation confirmed
IN	INTEGER	abbreviation of INTEGER used in constraints
#		
LCI	LCGN, LCN	used in most constraints
PS_UPDATE	(PS := (PS + 1) MOD SEQ_MODULO)	update the P(S) value
#		
PR_VERIFY	[(DATA.PR + SEQ_MODULO - PT) MOD SEQ_MODULO <= (PS + SEQ_MODULO - PT) MOD SEQ_MODULO]	verify the IUT is acknowledging previously transmitted Data packets
#		
#		
#		
PR_UPDATE	(PR := (DATA.PS + 1) MOD SEQ_MODULO)	update the P(R) value based on the received P(S)
#		
PT_UPDATE1	(PT := DATA.PR)	update trailing edge counter PT for the transmitted window
#		
PT_UPDATE2	(PT := RR.PR)	update trailing edge counter PT for the transmitted window
#		
PT_UPDATE3	(PT := RNR.PR)	update trailing edge counter PT for the transmitted window
#		
PT_UPDATE4	(PT := REJ.PR)	update trailing edge counter PT for the transmitted window
#		

PDU Type Declaration		
PDU Name:ACCEPT (Call Accept/ Call Connected)	PCO Type:	Comments:
PDU Field Information		
Field Name	Type	Comments
HEADER	GROUP	
PTI	OCTETSTRING[1]	Packet Type Identifier
ADDRESS	GROUP	
FACILITY	GROUP	
UDATA	OCTETSTRING[0..128]	Called User Data field: extended format only; maximum length of 128
#		

PDU Type Declaration		
PDU Name:CALL (Call Request/ Incoming Call)	PCO Type:	Comments:
PDU Field Information		
Field Name	Type	Comments
HEADER	GROUP	
PTI	OCTETSTRING[1]	Packet Type Identifier
ADDRESS	GROUP	
FACILITY	GROUP	
UDATA	OCTETSTRING[0..128]	Called User Data field, maximum of 16 with no Fast Select and 128 with Fast Select Accept
#		
#		

PDU Type Declaration		
PDU Name:CLEAR (Clear Request/ Clear Indication)	PCO Type:	Comments:
PDU Field Information		
Field Name	Type	Comments
HEADER	GROUP	
PTI	OCTETSTRING[1]	Packet Type Identifier
CAUSE_DIAG	GROUP	
ADDRESS	GROUP	
FACILITY	GROUP	
UDATA	OCTETSTRING[0..128]	Clear User Data field: extended format only; maximum length of 128 octets
#		
#		

PDU Type Declaration		
PDU Name : CLEARC (Clear Confirmation)	PCO Type :	Comments :
PDU Field Information		
Field Name	Type	Comments
HEADER	GROUP	
PTI	OCTETSTRING[1]	Packet Type Identifier
ADDRESS	GROUP	
FACILITY	GROUP	
EXTRA	OCTETSTRING	used to create long CLEARC packets

PDU Type Declaration		
PDU Name : DATA (Data Request/ Data Indication)	PCO Type :	Comments :
PDU Field Information		
Field Name	Type	Comments
HEADER	GROUP	
PTI	BITSTRING[1]	Packet Type Identifier (basic format is one octet, extended format is two octets)
#		
#		
PS	INTEGER	Send Sequence Number; modulo may be 8 or 128
#		
M	BITSTRING[1]	More Data bit
PR	INTEGER	Receive Sequence Number; modulo may be 8 or 128
#		
UDATA	OCTETSTRING[0..MAX_PKT_SZ]	Packet size based on PIXIT 1.10 and 1.11
#		
EXTRA	OCTETSTRING	To create long Data packets

PDU Type Declaration		
PDU Name : DIAG (Diagnostic)	PCO Type :	Comments :
PDU Field Information		
Field Name	Type	Comments
HEADER	GROUP	
PTI	OCTETSTRING[1]	Packet Type Identifier
DIAG	OCTETSTRING[1]	Diagnostic Code
EXPLN	OCTETSTRING[2..3]	Explanation; length may be either 2 or 3, depending on the reason for the packet. See ISO 8208, section 12.7; CCITT X.25 1984, section 5.6.2
#		
#		
#		
#		
EXTRA	OCTETSTRING	To create a long DIAG packet

PDU Type Declaration		
PDU Name : ERROR	PCO Type :	Comments :
PDU Field Information		
Field Name	Type	Comments
HEADER	GROUP	
PTI	OCTETSTRING[1]	Packet Type Identifier
OCT4	OCTETSTRING[1]	fourth octet, may or may not be used
#		

PDU Type Declaration		
PDU Name : INT (Interrupt Request/ Interrupt Indication)	PCO Type :	Comments :
PDU Field Information		
Field Name	Type	Comments
HEADER	GROUP	
PTI	OCTETSTRING[1]	Packet Type Identifier
UDATA	OCTETSTRING[1..32]	
EXTRA	OCTETSTRING	To create long Interrupt packets

PDU Type Declaration		
PDU Name : INTC (Interrupt Confirmation)	PCO Type :	Comments :
PDU Field Information		
Field Name	Type	Comments
HEADER	GROUP	
PTI	OCTETSTRING[1]	Packet Type Identifier
EXTRA	OCTETSTRING	To create long Interrupt Confirmation packets
#		

PDU Type Declaration		
PDU Name : REG (Registration Request)	PCO Type :	Comments :
PDU Field Information		
Field Name	Type	Comments
HEADER	GROUP	
PTI	OCTETSTRING[1]	Packet Type Identifier
ADDRESS	GROUP	
R_LEN	OCTETSTRING[1]	Registration Field Length in octets
#		
R_CODE	OCTETSTRING[1]	Registration Code, see ISO 8208, section 16
#		
R_PARMS	OCTETSTRING[1..109]	Registration parameters, see ISO 8208 section 16
#		

PDU Type Declaration		
PDU Name: REGC (Registration Confirmation)	PCO Type:	Comments:
PDU Field Information		
Field Name	Type	Comments
HEADER	GROUP	Packet Type Identifier
PTI	OCTETSTRING[1]	
CAUSE_DIAG	GROUP	
ADDRESS	GROUP	
R_LEN	OCTETSTRING[1]	
R_FAC	OCTETSTRING[1..109]	Length of the Registration Field see ISO 8208 section 16

PDU Type Declaration		
PDU Name: REJ (Reject)	PCO Type:	Comments:
PDU Field Information		
Field Name	Type	Comments
HEADER	GROUP	Packet Type Identifier
PTI	BITSTRING	
PR	INTEGER[3..7]	
#		
#		
#		Receive Sequence Number, modulo may be 8 or 128. See ISO 8208, section 7.1; X.25 1984, section 4. 4.1
EXTRA	OCTETSTRING	To create long Reject packets

PDU Type Declaration		
PDU Name: RESET (Reset Request/ Reset Indication)	PCO Type:	Comments:
PDU Field Information		
Field Name	Type	Comments
HEADER	GROUP	Packet Type Identifier
PTI	OCTETSTRING[1]	
CAUSE_DIAG	GROUP	
EXTRA	OCTETSTRING	To create long Resets

PDU Type Declaration		
PDU Name: RESETC (Reset Confirmation)	PCO Type:	Comments:
PDU Field Information		
Field Name	Type	Comments
HEADER PTI EXTRA #	GROUP OCTETSTRING[1] OCTETSTRING	Packet Type Identifier To create a long Reset Confirmation

PDU Type Declaration		
PDU Name: RESTART (Restart Request/ Restart Indication)	PCO Type:	Comments:
PDU Field Information		
Field Name	Type	Comments
HEADER PTI CAUSE_DIAG EXTRA	GROUP OCTETSTRING[1] GROUP OCTETSTRING	Packet Type Identifier To create long Restarts

PDU Type Declaration		
PDU Name: RESTART_1 (Restart Request/ Restart Indication)	PCO Type:	Comments: This PDU is used in test cases P1_210, P2_214 and P3_214
PDU Field Information		
Field Name	Type	Comments
GFI LCGN LCN PTI CAUSE_DIAG	BITSTRING[4] BITSTRING[4] BITSTRING[8] OCTETSTRING[1] GROUP	General Format Identifier Logical Channel Group Number Logical Channel Number Packet Type Identifier

PDU Type Declaration		
PDU Name: RESTARTC (Restart Confirmation)	PCO Type:	Comments:
PDU Field Information		
Field Name	Type	Comments
HEADER PTI EXTRA	GROUP OCTETSTRING[1] OCTETSTRING	Packet Type Identifier To create long Restart Confirms

PDU Type Declaration		
PDU Name :RNR (Receive Not Ready)	PCO Type :	Comments :
PDU Field Information		
Field Name	Type	Comments
HEADER	GROUP	
PTI	BITSTRING	Packet Type Identifier
PR	INTEGER	Receive Sequence Number, modulo
#		may be 8 or 128. See ISO 8208
#		section 7.1; X.25 1984 section
#		4.4.1
EXTRA	OCTETSTRING	To create long RNR packets

PDU Type Declaration		
PDU Name :RR (Receive Ready)	PCO Type :	Comments :
PDU Field Information		
Field Name	Type	Comments
HEADER	GROUP	
PTI	BITSTRING[5..8]	Packet Type Identifier
PR	INTEGER[3..7]	Receive Sequence Number: Modulo
#		may be 8 or 128. See ISO 8208,
#		section 7.1; X.25 1984 section
#		4.4.1
EXTRA	OCTETSTRING	To create long RR Packets

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

PDU Field Group Type Declaration		
Field Group Name: ADDRESS		Comments:
PDU Field Information		
Field Name	Type	Comments
CALLED_L	HEXSTRING[0..1]	Length of Called Address
CALLING_L	HEXSTRING[0..1]	Length of Calling Address
CALLED	HEXSTRING[0..15]	BCD Called Address
CALLING	HEXSTRING[0..15]	BCD Calling Address

PDU Field Group Type Declaration		
Field Group Name: CAUSE_DIAG		Comments:
PDU Field Information		
Field Name	Type	Comments
CAUSE	OCTETSTRING[1]	Cause code
DIAG	OCTETSTRING[0..1]	Diagnostic code

PDU Field Group Type Declaration		
Field Group Name: FACILITY		Comments:
PDU Field Information		
Field Name	Type	Comments
F_LEN	OCTETSTRING[0..1]	Facility Length
FACILITIES #	OCTETSTRING	User supplied facility code and parameters
F_CODE	OCTETSTRING[0..1]	Facility code
F_PARM1	OCTETSTRING	First facility parameter
F_PARMS	OCTETSTRING	Remaining facility parameters

PDU Field Group Type Declaration		
Field Group Name: HEADER		Comments:
PDU Field Information		
Field Name	Type	Comments
LCGN	BITSTRING[4]	Logical Channel Group Number
FORMAT	BITSTRING[2]	Packet format basic/extended
DBIT	BITSTRING[1]	Delivery Confirmation bit
QBIT	BITSTRING[1]	Qualifier Bit
LCN	BITSTRING[8]	Logical Channel Number

PDU Constraints Declarations							
PDU Name: ACCEPT	Constraint Name	Field Name					Comments
		HEADER	PTI	ADDRESS	FACILITY	UDATA	
	ANSR_0 (LG, LN : BS)	HDR_G (LG, LN)	'0F'H	ADR_ZERO	FAC_ACCTX	CALL_CON_UD	TST to IUT Basic Format
	ANSR_0CUG (LG, LN : BS)	HDR_G (LG, LN)	'0E'H	ADR_CC	FAC_BCUG	-	TST to IUT Basic CUG
	ANSR_0D (LG, LN : BS)	HDR_QD (0, 1, LG, LN)	'0E'H	ADR_ZERO	FAC_ACCTX	CALL_CON_UD	TST to IUT with D-bit set
	ANSR_0THR (LG, LN : BS)	HDR_G (LG, LN)	'0F'H	ADR_CC	FAC_THRUPT	-	TST to IUT Throughput class negotiation
	#						
	ANSR_0U1 (LG, LN : BS)	HDR_G (LG, LN)	'0F'H	ADR_CC	-	UD1	TST to IUT 1 octet in UDF
	ANSR_0U129 (LG, LN : #BS)	HDR_G (LG, LN)	'0F'H	ADR_CC	-	UD129	TST to IUT 129 octets in UDF
	#						
	ANSR_0UD (LG, LN : BS)	HDR_G (LG, LN)	'0E'H	ADR_ZERO	-	CALL_CON_UD	TST to IUT
	ANSR_1 (LG, LN : BS)	HDR_G (LG, LN)	'0F'H	ADR_CA	FAC_ACCRX	CALL_ACC_UD	IUT to TST
	ANSR_1A (LG, LN : BS)	HDR_G (LG, LN)	'0F'H	ADR_CA	-	-	
	ANSR_1AEF (LG, LN : BS)	HDR_G (LG, LN)	'0F'H	ADR_ANY_A	FAC_AE_A	-	
	ANSR_1D (LG, LN : BS)	HDR_ANY_D (LG, LN)	'0F'H	ADR_CA	FAC_ACCRX	CALL_ACC_UD	IUT to TST any D-bit setting
	ANSR_1DTHR (LG, LN : #BS)	HDR_G (LG, LN)	'0F'H	ADR_ANY_A	FAC_DEF_THR	-	
	#						
	ANSR_1M (LG, LN : BS)	HDR_G (LG, LN)	'0F'H	ADR_M_A	-	-	IUT to TST maximum address size
	#						
	ANSR_1PAC (LG, LN : BS)	HDR_G (LG, LN)	'0F'H	ADR_ANY_A	FAC_PACKET	-	IUT to TST Packet size
	ANSR_1THR (LG, LN : BS)	HDR_G (LG, LN)	'0F'H	ADR_ANY	FAC_THRUPT	-	IUT to TST Throughput class negotiation
	#						
	ANSR_1WIN (LG, LN : BS)	HDR_G (LG, LN)	'0F'H	ADR_ANY_A	FAC_WINDOW	-	IUT to TST Window size
	ANSR_X (LG, LN : BS)	HDR_X (LG, LN)	'0F'H	ADR_CA	-	-	extended sequence number
	ANSR_ZERO	HDR_ZERO	'0F'H	ADR_ZERO	-	-	

STANDARDSISO.COM Client View the PDF of ISO/IEC 8882-3:1991

PDU Constraints Declarations						
PDU Name: CALL	Field Name					
	Constraint Name	HEADER	PTI	ADDRESS	FACILITY	UDATA
CALL_0 (LG, LN :BS)	HDR_G (LG, LN)	'0B'H	ADR_IC	FAC_CALLTX	CALL_IND_UD	TST to IUT Call Request
CALL_0CUG (LG, LN :BS)	HDR_G (LG, LN)	'0B'H	ADR_IC	FAC_BCUG	-	TST to IUT Basic CUG
CALL_0D (LG, LN :BS)	HDR_QD (0, 1, LG, LN)	'0B'H	ADR_IC	FAC_CALLTX	CALL_IND_UD	TST to IUT D-bit set
CALL_0DTHR (LG, LN :BS)	HDR_G (LG, LN)	'0B'H	ADR_IC	FAC_DEF_THR	-	TST to IUT Default Throughput
CALL_0FST (LG, LN :BS)	HDR_G (LG, LN)	'0B'H	ADR_IC	FAC_FST_SEL	CALL_IND_UD	TST to IUT fast select no restriction
CALL_0FSTR (LG, LN :BS)	HDR_G (LG, LN)	'0B'H	ADR_IC	FAC_FST_SELR	CALL_IND_UD	TST to IUT fast select with restriction
CALL_1	HDR_G_ANY	'0B'H	ADR_CR	FAC_CALLRX	CALL_REQ_UD	IUT to TST Call Request
CALL_1CUG	HDR_G_ANY	'0B'H	ADR_CR	FAC_BCUG	-	IUT to TST CUG Selection
CALL_1DTHR	HDR_G_ANY	'0B'H	ADR_CR	FAC_DEF_THR	-	IUT to TST Default Throughput
CALL_1FST	HDR_G_ANY	'0B'H	ADR_CR	FAC_FST_SEL	CALL_REQ_UD	IUT to TST fast select no restriction
CALL_1FSTR	HDR_G_ANY	'0B'H	ADR_CR	FAC_FST_SELR	CALL_REQ_UD	IUT to TST fast select with restriction
CALL_AEF (LG, LN :BS)	HDR_G (LG, LN)	'0B'H	ADR_EX	FAC_AE	-	TST to IUT Address Extension
CALL_BICUG (LG, LN :BS)	HDR_G (LG, LN)	'0B'H	ADR_IC	FAC_BICUG	-	TST to IUT Bilateral CUG
CALL_DINV (LG, LN :BS)	HDR_G (LG, LN)	'0B'H	ADR_IVCD	FAC_CALLTX	CALL_IND_UD	TST to IUT Called Address Invalid
CALL_DUR (LG, LN :BS)	HDR_G (LG, LN)	'0B'H	ADR_IC	FAC_DURATN	-	TST to IUT Call Duration
CALL_DWIN (LG, LN :BS)	HDR_G (LG, LN)	'0B'H	ADR_IC	FAC_DEF_WIN	-	TST to IUT Default Window Size
CALL_ECUG (LG, LN :BS)	HDR_G (LG, LN)	'0B'H	ADR_IC	FAC_ECUG	-	TST to IUT Extended CUG
CALL_F0 (LG, LN :BS)	HDR_G (LG, LN)	'0B'H	ADR_IC	FAC_EMPTY	-	TST to IUT missing facilities
CALL_F110 (LG, LN :BS)	HDR_G (LG, LN)	'0B'H	ADR_IC	FAC_LNG_110	-	TST to IUT long facilities

Continued on next page

..... Continued from previous page.

CALL_FCB (LG, LN : BS)	HDR_G (LG, LN)	'0B'H	ADR_IC	FAC_CODE_BAD	-	TST to IUT bad facility code
CALL_FNA (LG, LN : BS)	HDR_G (LG, LN)	'0B'H	ADR_IC	FAC_NOT_ALL	-	TST to IUT facility not allowed
CALL_FSH (LG, LN : BS)	HDR_G (LG, LN)	'0B'H	ADR_IC	FAC_SHORT	-	TST to IUT short facilities
CALL_GINV (LG, LN : BS)	HDR_G (LG, LN)	'0B'H	ADR_IVCG	FAC_CALLTX	CALL_IND_UD	TST to IUT Calling Address
CALL_M (LG, LN : BS)	HDR_G (LG, LN)	'0B'H	ADR_M	FAC_CALLTX	CALL_IND_UD	TST to IUT Maximum address size
CALL_NBCD (LG, LN : BS)	HDR_G (LG, LN)	'0B'H	ADR_NBCD	FAC_CALLTX	CALL_IND_UD	TST to IUT Non-BCD Address
CALL_NUI (LG, LN : BS)	HDR_G (LG, LN)	'0B'H	ADR_IC	FAC_NUI	-	TST to IUT Network User Identification
CALL_PSZM (LG, LN : BS)	HDR_G (LG, LN)	'0B'H	ADR_IC	FAC_MPKT_SIZ	-	TST to IUT Maximum PKT Size
CALL_PSZD (LG, LN : BS)	HDR_G (LG, LN)	'0B'H	ADR_IC	FAC_DPRT_SIZ	-	TST to IUT Default PKT Size (128)
CALL_RC (LG, LN : BS)	HDR_G (LG, LN)	'0B'H	ADR_IC	FAC_FST_SELA	-	TST to IUT fast select reverse charging
CALL_SHT (LG, LN : BS)	HDR_G (LG, LN)	'0B'H	-	-	-	TST to IUT short call PKT
CALL_THR (LG, LN : BS)	HDR_G (LG, LN)	'0B'H	ADR_IC	FAC_THRUPT	-	TST to IUT Throughput class negotiation
CALL_TRD (LG, LN : BS)	HDR_G (LG, LN)	'0B'H	ADR_IC	FAC_TRDELAY	-	TST to IUT Transit Delay
CALL_U17 (LG, LN : BS)	HDR_G (LG, LN)	'0B'H	ADR_IC	FAC_ZERO	UD17	TST to IUT 17 octets in UDF
CALL_U129 (LG, LN : BS)	HDR_G (LG, LN)	'0B'H	ADR_IC	FAC_FST_SEL	UD129	TST to IUT 129 octets in UDF
CALL_X (LG, LN : BS)	HDR_X (LG, LN)	'0B'H	ADR_IC	FAC_CALLRX	CALL_IND_UD	TST to IUT Extended sequence Number
CALL_ZERO	HDR_ZERO	'0B'H	ADR_IC	-	-	

STANDARDSDOWNLOAD.COM Click to view the full PDF of ISO/IEC 8882-3:1991

PDU Constraints Declarations							
PDU Name: CLEAR	Field Name						
	Constraint Name	HEADER	PTI	CAUSE_DIAG	ADDRESS	FACILITY	UDATA
CLR_0 (LG, LN :BS)	HDR_G (LG, LN)	'13'H	RZN_00	-	FAC_CLRTX	CLR_REQ_UD	TST to IUT basic IUT to TST
CLR_1 (LG, LN :BS)	HDR_G (LG, LN)	'13'H	RZN_ANY	ADR_ANY	*	*	
CLR_C01 (LG, LN :BS)	HDR_G (LG, LN)	'13'H	CAUSE01	-	-	-	
CLR_C05 (LG, LN :BS)	HDR_G (LG, LN)	'13'H	CAUSE05	-	-	-	
CLR_C11 (LG, LN :BS)	HDR_G (LG, LN)	'13'H	CAUSE11	-	-	-	
CLR_C13 (LG, LN :BS)	HDR_G (LG, LN)	'13'H	CAUSE13	-	-	-	
CLR_C21 (LG, LN :BS)	HDR_G (LG, LN)	'13'H	CAUSE21	-	-	-	
CLR_CHRG (LG, LN :BS)	HDR_G (LG, LN)	'13'H	RZN_00	ADR_ZERO	FAC_DURATN	-	TST to IUT charging information
#							TST to IUT default window size
CLR_DWIN (LG, LN :BS)	HDR_G (LG, LN)	'13'H	RZN_00	ADR_ZERO	FAC_DEF_WIN	-	TST to IUT facility code bad
#							TST to IUT long clear
CLR_FCB (LG, LN :BS)	HDR_G (LG, LN)	'13'H	RZN_00	ADR_ZERO	FAC_CODE_BAD	-	TST to IUT short clear
#							TST to IUT user data
CLR_LNG (LG, LN :BS)	HDR_G (LG, LN)	'13'H	RZN_00	ADR_ZERO	FAC_ZERO	UD129	
CLR_SHT (LG, LN :BS)	HDR_G (LG, LN)	'13'H	RZN_NIL	ADR_ZERO	-	-	
CLR_U0 (LG, LN :BS)	HDR_G (LG, LN)	'13'H	RZN_00	ADR_ZERO	FAC_CLRTX	CLR_REQ_UD	
CLR_ZERO	HDR_ZERO	'13'H	RZN_00	-	-	-	

PDU Constraints Declarations							
PDU Name: CLEARC	Field Name						
	Constraint Name	HEADER	PTI	ADDRESS	FACILITY	EXTRA	Comments
CLR_C0 (LG, LN :BS)	HDR_G (LG, LN)	'17'H	ADR_ZERO	FAC_CLCTX	-	-	TST to IUT
CLR_C1 (LG, LN :BS)	HDR_G (LG, LN)	'17'H	ADR_ANY	-	-	-	IUT to TST
CLR_C_R (LG, LN :BS)	HDR_G (LG, LN)	'17'H	ADR_ZERO	FAC_FST_SELA	UD1	UD110	TST to IUT Reverse Charging
CLR_C_U1 (LG, LN :BS)	HDR_G (LG, LN)	'17'H	-	-	-	-	PIXIT 2.17
CLR_C_U110 (LG, LN :BS)	HDR_G (LG, LN)	'17'H	ADR_ZERO	-	-	-	PIXIT 2.17
CLR_C_ZERO	HDR_ZERO	'17'H	ADR_ZERO	-	-	-	

PDU Constraints Declarations										
PDU Name: DATA	Constraint Name	Field Name								Comments
		HEADER	PTI	PS	M	PR	UDATA	EXTRA		
	D_0 (LG, LN :BS)	HDR_QD(Q,D, LG, LN)	'?????????'B	?	M	?	UD_0	-	PIXIT 2.13	
	D_1 (LG, LN :BS)	HDR_QD(Q,D, LG, LN)	'?????????'B	?	M	?	UD_1	-	PIXIT 2.13	
	D_2 (LG, LN :BS)	HDR_QD(Q,D, LG, LN)	'?????????'B	?	M	?	UD_2	-	PIXIT 2.13	
	D_3 (LG, LN :BS)	HDR_QD(Q,D, LG, LN)	'?????????'B	?	M	?	UD_3	-	PIXIT 2.13	
	D_4 (LG, LN :BS)	HDR_QD(Q,D, LG, LN)	'?????????'B	?	M	?	UD_4	-	PIXIT 2.13	
	D_5 (LG, LN :BS)	HDR_QD(Q,D, LG, LN)	'?????????'B	?	M	?	UD_5	-	PIXIT 2.13	
	D_6 (LG, LN :BS)	HDR_QD(Q,D, LG, LN)	'?????????'B	?	M	?	UD_6	-	PIXIT 2.13	
	D_7 (LG, LN :BS)	HDR_QD(Q,D, LG, LN)	'?????????'B	?	M	?	UD_7	-	PIXIT 2.13	
	D_8 (LG, LN :BS)	HDR_QD(Q,D, LG, LN)	'?????????'B	?	M	?	UD_8	-	PIXIT 2.13	
	D_DBIT (LG, LN :BS)	HDR_QD(0, 1, LG, LN)	'?????????'B	0	0	0	UD_U	-	PIXIT 2.13	
	D_EMPTY (LG, LN :BS; #PS, PR :IN)	HDR_G (LG, LN)	'?????????'B	PS	0	PR	-	-	TST to IUT no data	
	D_L (LG, LN :BS)	HDR_G (LG, LN)	'?????????'B	0	0	0	UD_U	UD1	PIXIT 2.13, 2.19	
	D_M4 (LG, LN :BS)	HDR_QD(Q,D, LG, LN)	'?????????'B	0	M	0	UDMP	-	PIXIT 2.18	
	D_ML (LG, LN :BS)	HDR_G (LG, LN)	'?????????'B	0	1	0	UD_U	UD1	PIXIT 2.13, 2.19	
	D_NSSZ (LG, LN :BS)	HDR_G (LG, LN)	'?????????'B	0	0	0	UDNS	-	PIXIT 2.19	
	D_ONE (LG, LN :BS)	HDR_QD(Q,D, LG, LN)	'?????????'B	0	0	0	UD_U	-	PIXIT 2.13	
	D_PR7 (LG, LN :BS)	HDR_G (LG, LN)	'?????????'B	0	0	7	UD_U	-	PIXIT 2.13	
	D_PS7 (LG, LN :BS)	HDR_G (LG, LN)	'?????????'B	7	0	0	UD_U	-	PIXIT 2.13	
	D_U (LG, LN :BS)	HDR_QD(Q,D, LG, LN)	'?????????'B	?	M	?	UD_U	-	PIXIT 2.13	
	DAT_1 (LG, LN :BS)	HDR_G (LG, LN)	'?????????'B	?	?	?	?	-	IUT to TST	
	DAT_1A (LG, LN :BS; PS #:IN)	HDR_G (LG, LN)	'?????????'B	PS	?	?	?	-	IUT to TST	
	DAT_ZERO	HDR_ZERO	'?????????'B	0	0	0	UD_U	-	PIXIT 2.13	
	DE0 (LG, LN :BS)	HDR_QD(Q,D, LG, LN)	'?????????'B	?	M	?	UDE0	-	PIXIT 2.16	
	DE1 (LG, LN :BS)	HDR_QD(Q,D, LG, LN)	'?????????'B	?	M	?	UDE1	-	PIXIT 2.16	
	DE2 (LG, LN :BS)	HDR_QD(Q,D, LG, LN)	'?????????'B	?	M	?	UDE2	-	PIXIT 2.16	

Continued on next page

..... Continued from previous page.

DE3 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDE3	-	PIXIT 2.16
DE4 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDE4	-	PIXIT 2.16
DE5 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDE5	-	PIXIT 2.16
DE6 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDE6	-	PIXIT 2.16
DE7 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDE7	-	PIXIT 2.16
DE8 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDE8	-	PIXIT 2.16
DM_0 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDM0	-	PIXIT 2.17
DM_1 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDM1	-	PIXIT 2.17
DM_2 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDM2	-	PIXIT 2.17
DM_3 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDM3	-	PIXIT 2.17
DM_4 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDM4	-	PIXIT 2.17
DM_5 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDM5	-	PIXIT 2.17
DM_6 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDM6	-	PIXIT 2.17
DM_7 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDM7	-	PIXIT 2.17
DM_8 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDM8	-	PIXIT 2.17
DQ_0 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDQ0	-	PIXIT 2.14
DQ_1 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDQ1	-	PIXIT 2.14
DQ_2 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDQ2	-	PIXIT 2.14
DQ_3 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDQ3	-	PIXIT 2.14
DQ_4 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDQ4	-	PIXIT 2.14
DQ_5 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDQ5	-	PIXIT 2.14
DQ_6 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDQ6	-	PIXIT 2.14
DQ_7 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDQ7	-	PIXIT 2.14
DQ_8 (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDQ8	-	PIXIT 2.14
DQ_0A (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDQ0A	-	PIXIT 2.15
DQ_1A (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDQ1A	-	PIXIT 2.15
DQ_2A (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDQ2A	-	PIXIT 2.15
DQ_3A (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDQ3A	-	PIXIT 2.15
DQ_4A (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDQ4A	-	PIXIT 2.15
DQ_5A (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDQ5A	-	PIXIT 2.15
DQ_6A (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDQ6A	-	PIXIT 2.15
DQ_7A (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDQ7A	-	PIXIT 2.15
DQ_8A (LG, LN :BS)	HDR_QD (Q, D, LG, LN)	'???????'B	?	M	?	UDQ8A	-	PIXIT 2.15

PDU Constraints Declarations						
PDU Name:DIAG						
Constraint Name	Field Name					Comments
	HEADER	PTI	DIAG	EXPLN	EXTRA	
DGN_0 (LG, LN :BS)	HDR_G (LG, LN)	'F1'H	0	-	-	TST to IUT
DGN_1 (LG, LN :BS)	HDR_G (LG, LN)	'F1'H	0	-	-	IUT to TST
DGN_L (LG, LN :BS)	HDR_G (LG, LN)	'F1'H	0	UP3	UD1	
DGN_SHT	HDR_ZERO	'F1'H	=	=	-	
DGN_ZERO	HDR_ZERO	'F1'H	0	=	-	

PDU Constraints Declarations						
PDU Name:ERROR						
Constraint Name	Field Name					Comments
	HEADER	PTI	OCT4			
ERR_A	HDR_SHRT (0, 0, 0)	=	-			only GFI and LCGN present undefined PTI on LCI (not zero) short packet, no PTI undefined PTI LCI 0
ERR_B (LG, LN :BS)	HDR_G (LG, LN)	'0D'H	-			
ERR_SHT (LG, LN :BS)	HDR_G (LG, LN)	=	-			
ERR_ZERO	HDR_ZERO	'0D'H	-			

STANDARD SIX.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

PDU Constraints Declarations

PDU Name: INT		Field Name				Comments
Constraint Name	HEADER	PTI	UDATA	EXTRA		
INT_0 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	UD_I_TST	-	TST to IUT PIXIT 2.20b	
INT_1 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	UD_I_IUT	-	IUT to TST PIXIT 2.20a	
INT_A1 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	1 octet length	
INT_A2 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	2 octets length	
INT_A3 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	3 octets length	
INT_A4 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	4 octets length	
INT_A5 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	5 octets length	
INT_A6 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	6 octets length	
INT_A7 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	7 octets length	
INT_A8 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	8 octets length	
INT_A9 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	9 octets length	
INT_A10 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	10 octets length	
INT_A11 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	11 octets length	
INT_A12 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	12 octets length	
INT_A13 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	13 octets length	
INT_A14 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	14 octets length	
INT_A15 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	15 octets length	
INT_A16 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	16 octets length	
INT_A17 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	17 octets length	
INT_A18 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	18 octets length	
INT_A19 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	19 octets length	
INT_A20 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	20 octets length	
INT_A21 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	21 octets length	
INT_A22 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	22 octets length	
INT_A23 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	23 octets length	
INT_A24 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	24 octets length	
INT_A25 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	25 octets length	

Continued on next page

..... Continued from previous page.

INT_A26 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	26 octets length
INT_A27 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	27 octets length
INT_A28 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	28 octets length
INT_A29 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	29 octets length
INT_A30 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	30 octets length
INT_A31 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	31 octets length
INT_A32 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	?	-	32 octets length
INT_L1 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	UD1	UD1	Long Interrupt CCITT 1980
INT_L32 (LG, LN :BS)	HDR_G (LG, LN)	'23'H	UD32	UD1	Long Interrupt ISO/CCITT 1984
INT_SHT (LG, LN :BS)	HDR_G (LG, LN)	'23'H	-	-	Short Interrupt
INT_ZERO	HDR_ZERO	'23'H	0	-	

PDU Constraints Declarations				
Constraint Name	Field Name			Comments
	HEADER	PTI	EXTRA	
INTC_0 (LG, LN :BS)	HDR_G (LG, LN)	'27'H	-	TST to IUT
INTC_1 (LG, LN :BS)	HDR_G (LG, LN)	'27'H	-	IUT to TST
INTC_L (LG, LN :BS)	HDR_G (LG, LN)	'27'H	UD1	
INTC_ZERO	HDR_ZERO	'27'H	-	

STANDARDS.PDF.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

PDU Constraints Declarations

PDU Name:REG Constraint Name	Field Name								Comments
	HEADER	PTI	ADDRESS	R_LEN	R_CODE	R_PARMS			
REG_0	HDR_ZERO	'F3'H	ADR_ZERO	0	-	-			TST to IUT
REG_1	HDR_ZERO	'F3'H	ADR_ZERO	0	-	-			IUT to TST
REG_1CH	HDR_ZERO	'F3'H	ADR_ZERO	3	'45'H	'4000'H			charging information
REG_1D	HDR_ZERO	'F3'H	ADR_ZERO	2	'05'H	'04'H			delivery confirmation
REG_1DEF	HDR_ZERO	'F3'H	ADR_ZERO	2	'02'H	DEF_THRUPT			default throughput
REG_1F	HDR_ZERO	'F3'H	ADR_ZERO	3	'45'H	1000'H			flow control negotiation
REG_1FST	HDR_ZERO	'F3'H	ADR_ZERO	3	'45'H	'0400'H			fast select
REG_1ICB	HDR_ZERO	'F3'H	ADR_ZERO	3	'45'H	'0100'H			incoming calls barred
REG_1OCB	HDR_ZERO	'F3'H	ADR_ZERO	3	'45'H	'0200'H			outgoing calls barred
REG_1PSZ	HDR_ZERO	'F3'H	ADR_ZERO	3	'42'H	NS_DEF_PKT_SZ			non-standard packet size
REG_1R	HDR_ZERO	'F3'H	ADR_ZERO	2	'05'H	'02'H			pkt retransmission
REG_1RC	HDR_ZERO	'F3'H	ADR_ZERO	3	'45'H	'0800'H			reverse charging
REG_1TH	HDR_ZERO	'F3'H	ADR_ZERO	3	'45'H	'2000'H			throughput class
#									negotiation
REG_1WSZ	HDR_ZERO	'F3'H	ADR_ZERO	3	'43'H	NS_DEF_WIN_SZ			non-standard window size
REG_1X	HDR_ZERO	'F3'H	ADR_ZERO	2	'05'H	'01'H			extended sequence number

STANDARDSISSUE.COM Click to view the PDF of ISO/IEC 8882-3:1991

PDU Constraints Declarations									
PDU Name: REGC									
Constraint Name	Field Name								
	HEADER	PTI	CAUSE_DIAG	ADDRESS	R_LEN	R_FAC	Comments		
REGC_0	HDR_ZERO	'F7'H	RZN_00	ADR_ZERO	-	-	TST to IUT		
REGC_1	HDR_ZERO	'F7'H	RZN_ANY	ADR_ZERO	-	-	IUT to TST		
REGC_0CH	HDR_ZERO	'F7'H	RZN_00	ADR_ZERO	3	'461000'H	Charging Information		
REGC_0D	HDR_ZERO	'F7'H	RZN_00	ADR_ZERO	3	'460400'H	D-bit modification		
REGC_0DEF	HDR_ZERO	'F7'H	RZN_00	ADR_ZERO	3	'460001'H	Default Throughput Class Assignment		
#							Flow Control Parameter Negotiation		
REGC_0F	HDR_ZERO	'F7'H	RZN_00	ADR_ZERO	3	'451000'H	Fast Select Accept		
#							Incoming Calls Barred		
REGC_0FST	HDR_ZERO	'F7'H	RZN_00	ADR_ZERO	3	'450400'H	Outgoing Calls Barred		
REGC_0ICB	HDR_ZERO	'F7'H	RZN_00	ADR_ZERO	3	'450100'H	Non-std Default Pkt Size		
REGC_0OCB	HDR_ZERO	'F7'H	RZN_00	ADR_ZERO	3	'450200'H	Pkt Retransmission		
REGC_0PSZ	HDR_ZERO	'F7'H	RZN_00	ADR_ZERO	3	'460004'H	Reverse Charging		
REGC_0R	HDR_ZERO	'F7'H	RZN_00	ADR_ZERO	3	'460200'H	Throughput Class		
REGC_0RC	HDR_ZERO	'F7'H	RZN_00	ADR_ZERO	3	'464000'H	Negotiation Facility		
REGC_0TH	HDR_ZERO	'F7'H	RZN_00	ADR_ZERO	3	'452000'H	Non-standard Default Window Size		
#							Extended Sequence Number		
REGC_0WSZ	HDR_ZERO	'F7'H	RZN_00	ADR_ZERO	3	'460002'H			
#									
REGC_0X	HDR_ZERO	'F7'H	RZN_00	ADR_ZERO	3	'460100'H			

STANDARDS.ISO.COM © 2010 view the full PDF at http://standards.iso.org/iso/8882-3:1997

PDU Constraints Declarations						
PDU Name : REJ						
Constraint Name	Field Name				Comments	
	HEADER	PTI	PR	EXTRA		
REJ_0 (LG, LN : BS)	HDR_G (LG, LN)	'00001001'B	0	-	TST to IUT with P(S)=0, P(R)=0	
REJ_1 (LG, LN : BS)	HDR_G (LG, LN)	'???01001'B	0	-	IUT to TST with P(S)=?, P(R)=0	
REJ_1A (LG, LN : BS)	HDR_G (LG, LN)	'???01001'B	?	-	IUT to TST with P(S)=?, P(R)=?	
REJ_ZERO	HDR_ZERO	'00001001'B	0	-	TST to IUT with P(S)=0, P(R)=0	

PDU Constraints Declarations						
PDU Name : RESET						
Constraint Name	Field Name				Comments	
	HEADER	PTI	CAUSE_DIAG	EXTRA		
RST_0 (LG, LN : BS)	HDR_G (LG, LN)	'1B'H	RZN_00	-	TST to IUT	
RST_1 (LG, LN : BS)	HDR_G (LG, LN)	'1B'H	RZN_ANY	-	IUT to TST	
RST_1D2 (LG, LN : BS)	HDR_G (LG, LN)	'1B'H	RZN_02	UD1	IUT to TST with cause code 2	
RST_L (LG, LN : BS)	HDR_G (LG, LN)	'1B'H	RZN_00	-		
RST_SHT (LG, LN : BS)	HDR_G (LG, LN)	'1B'H	-	-		
RST_ZERO	HDR_ZERO	'1B'H	RZN_00	-		

PDU Constraints Declarations				
PDU Name: RESETC				
Constraint Name	Field Name			Comments
	HEADER	PTI	EXTRA	
RSTC_0 (LG, LN :BS)	HDR_G (LG, LN)	'1F'H	-	TST to IUT
RSTC_1 (LG, LN :BS)	HDR_G (LG, LN)	'1F'H	-	IUT to TST
RSTC_L (LG, LN :BS)	HDR_G (LG, LN)	'1F'H	UD1	
RSTC_ZERO	HDR_ZERO	'1F'H	-	

PDU Constraints Declarations				
PDU Name: RESTART				
Constraint Name	Field Name			Comments
	HEADER	PTI	EXTRA	
STRT_IDCEA	HDR_ZERO	'FB'H	CAUSE_DCEA	IUT to TST IUT acting as DCE
STRT_IDTEA	HDR_ZERO	'FB'H	RZN_ANY	IUT to TST with any cause and diagnostic code
STRT_DCE	HDR_ZERO	'FB'H	CAUSE07	network operational
STRT_DTE	HDR_ZERO	'FB'H	RZN_00	
STRT_LO	HDR_ZERO	'FB'H	RZN_00	UD1
STRT_NIL	HDR_NIL	'FB'H	RZN_00	
STRT_NR	HDR_ZERO	'FB'H	RZN_NIL	
STRT_NZ (LG, LN :BS)	HDR_G (LG, LN)	'FB'H	RZN_00	TST to IUT non zero lci

PDU Constraints Declarations							
PDU Name: RESTART_1							
Constraint Name	Field Name			Comments			
	GFI	LCGN	LCN		PTI		
STRT_UDF	?	'0000'B	'00000000'B	'FB'H	CAUSE_DIAG	RZN_00	user defined GFI

PDU Constraints Declarations				
PDU Name : RESTARTC				
Constraint Name	Field Name			Comments
	HEADER	PTI	EXTRA	
STRTC	HDR_G(0,0)	'FF'H	-	TST to IUT
STRTC_1	HDR_G(0,0)	'FF'H	-	IUT to TST
STRTC_LO	HDR_G(0,0)	'FF'H	UD1	
STRTC_L(LG, LN : BS)	HDR_G(LG, LN)	'FF'H	UD1	
STRTC_NZ(LG, LN : BS)	HDR_G(LG, LN)	'FF'H	-	TST to IUT with none zero lci

PDU Constraints Declarations				
PDU Name : RNR				
Constraint Name	Field Name			Comments
	HEADER	PTI	PR	
RNR_0(LG, LN : BS)	HDR_G(LG, LN)	'???00101'B	0	-
RNR_1(LG, LN : BS)	HDR_G(LG, LN)	'???00101'B	?	-
RNR_2(LG, LN : BS)	HDR_G(LG, LN)	'???00101'B	2	-
RNR_7(LG, LN : BS)	HDR_G(LG, LN)	'???00101'B	7	-
RNR_A(LG, LN : BS)	HDR_G(LG, LN)	'???00101'B	?	-
RNR_L(LG, LN : BS)	HDR_G(LG, LN)	'???00101'B	?	UD1
RNR_ZERO	HDR_ZERO	'???00101'B	0	-

STANDARDSPRO.COM Click to view the full PDF of ISO/IEC 8882-3:1991

PDU Constraints Declarations						
PDU Name: RR						
Constraint Name	Field Name				Comments	
	HEADER	PTI	PR	EXTRA		
RR_0 (LG, LN : BS)	HDR_G (LG, LN)	'????0001'B	0	-	TST to IUT	
RR_1 (LG, LN : BS)	HDR_G (LG, LN)	'????0001'B	?	-	IUT to TST P (R) = ?	
RR_1A (LG, LN : BS)	HDR_G (LG, LN)	'????0001'B	1	-	IUT to TST P (R) = 1	
RR_2 (LG, LN : BS)	HDR_G (LG, LN)	'????0001'B	2	-		
RR_7 (LG, LN : BS)	HDR_G (LG, LN)	'????0001'B	7	-		
RR_A (LG, LN : BS)	HDR_G (LG, LN)	'????0001'B	?	-		
RR_L (LG, LN : BS)	HDR_G (LG, LN)	'????0001'B	?	UD1		
RR_ZERO	HDR_ZERO	'????0001'B	0	-		

PDU Field Group Constraints Declarations						
Field Group Name: ADDRESS						
Constraint Name	Field Name				Comments	
	CALLED_L	CALLING_L	CALLED	CALLING		
ADR_ANY	*	*	*	*	TST accepts any address	
ADR_ANY_A	?	?	*	*	address length must be present but address may be null	
#					IUT to TST Call Accept PIXIT 2.3b	
ADR_CA	IUT_ADDR6_L	TST_ADDR6_L	IUT_ADDR6	TST_ADDR6	TST to IUT Call Connected PIXIT 2.2b	
ADR_CC	TST_ADDR2_L	IUT_ADDR2_L	TST_ADDR2	IUT_ADDR2	IUT to TST Call Request PIXIT 2.3a	
ADR_CR	TST_ADDR5_L	IUT_ADDR5_L	TST_ADDR5	IUT_ADDR5	TST to IUT	
ADR_EX	IUT_AF_L	TST_AF_L	IUT_AF	TST_AF	TST to IUT	
ADR_IC	IUT_ADDR1_L	TST_ADDR1_L	IUT_ADDR1	TST_ADDR1	TST to IUT Incoming Call PIXIT 2.2a	
ADR_IVCD	IUT_ADDR_INVL	TST_ADDR_INVL	IUT_ADDR_INV	TST_ADDR_INV	TST to IUT Invalid Called address	
ADR_IVCG	IUT_ADDR1_L	TST_ADDR1_L	IUT_ADDR1	TST_ADDR_INV	TST to IUT invalid Calling address	
ADR_M	IUT_ADDR_MAXL	0	IUT_ADDR_MAX	-	maximum address size PIXIT 2.4	
ADR_M_A	?	?	?	-	maximum address size	
ADR_NBCD	IUT_ADDR1_L	4	'FFFF'H	IUT_ADDR1	non-BCD address	
ADR_ZERO	0	0	-	-	TST transmits no address	

PDU Field Group Constraints Declarations			
Field Group Name: CAUSE_DIAG			
Constraint Name	Field Name		Comments
	CAUSE	DIAG	
CAUSE01	'01'H	'00'H	
CAUSE05	'05'H	'00'H	
CAUSE07	'07'H	'00'H	
CAUSE11	'11'H	'00'H	
CAUSE13	'13'H	'00'H	
CAUSE19	'19'H	'00'H	
CAUSE21	'21'H	'00'H	
CAUSE23	'23'H	'00'H	
CAUSE33	'33'H	'00'H	
RZN_00	'00'H	'00'H	
RZN_01	'00'H	'01'H	
RZN_02	'00'H	'02'H	
RZN_10	'00'H	'10'H	
RZN_11	'00'H	'11'H	
RZN_12	'00'H	'12'H	
RZN_13	'00'H	'13'H	
RZN_14	'00'H	'14'H	
RZN_15	'00'H	'15'H	
RZN_16	'00'H	'16'H	
RZN_17	'00'H	'17'H	
RZN_18	'00'H	'18'H	
RZN_1A	'00'H	'1A'H	
RZN_20	'00'H	'20'H	
RZN_21	'00'H	'21'H	
RZN_23	'00'H	'23'H	
RZN_24	'00'H	'24'H	
RZN_26	'00'H	'26'H	

Continued on next page

..... Continued from previous page.

RZN_27	'00'H	'27'H	
RZN_28	'00'H	'28'H	
RZN_29	'00'H	'29'H	
RZN_2B	'00'H	'2B'H	
RZN_31	'00'H	'31'H	
RZN_32	'00'H	'32'H	
RZN_34	'00'H	'34'H	
RZN_35	'00'H	'35'H	
RZN_38	'00'H	'38'H	
RZN_39	'00'H	'39'H	
RZN_42	'00'H	'42'H	
RZN_43	'00'H	'43'H	
RZN_44	'00'H	'44'H	
RZN_45	'00'H	'45'H	
RZN_51	'00'H	'51'H	
RZN_52	'00'H	'52'H	
RZN_ANY	?	*	
#			
RZN_DTEA	?	*	
RZN_DCEA	'05'H	*	
RZN_NIL	-	-	

for CCITT X.25 IUTs the diagnostic field is optional when basic format packets are used

STANDARDISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

PDU Field Group Constraints Declarations						
Field Group Name: FACILITY						
Constraint Name	Field Name					
	F_LEN	FACILITIES	F_CODE	F_PARM1	F_PARMS	Comments
FAC_ACCTX	CALL_CON_FL	CALL_CON_F	-	-	-	TST to IUT PIXIT 2.7c
FAC_ACCRX	CALL_ACC_FL	CALL_ACC_F	-	-	-	IUT to TST PIXIT 2.7d
FAC_AE	F_NONX25_L	F_NONX25	-	-	-	Address Extension PIXIT 2.5b
FAC_AE_A	F_AE_L	F_AE	-	-	-	IUT to TST PIXIT 2.5c
FAC_BCUG	'02'H	-	'03'H	BCUG_NUM	-	Basic CUG
FAC_BICUG	'03'H	-	'41'H	'00'H	BICUG_NUM	Bilateral CUG
FAC_CALLTX	CALL_IND_FL	CALL_IND_F	-	-	-	TST to IUT PIXIT 2.7a
FAC_CALLRX	CALL_REQ_FL	CALL_REQ_F	-	-	-	IUT to TST PIXIT 2.7b
FAC_CLRTX	CLR_IND_FL	CLR_IND_F	-	-	-	TST to IUT PIXIT 2.7e
FAC_CLCTX	CLC_RX_FL	CLC_RX_F	-	-	-	TST to IUT PIXIT 2.7g
FAC_CODE_BAD	'01'H	-	'FE'H	-	-	TST to IUT facility code bad
FAC_DEF_WIN	'03'H	-	'43'H	'02'H	'02'H	Default window size
FAC_DEF_THR	'02'H	-	'02'H	DEF_THRUP_T	-	Default throughput class neg.
FAC_DPKT_SIZ	'03'H	-	'42'H	'07'H	'07'H	Default pkt size 128
FAC_DURATN	'06'H	-	'C1'H	'04'H	'00000001'H	Charging Info: Call Duration 1 sec
FAC_ECUG	'03'H	-	'47'H	'10'H	ECUG_NUM	Extended CUG
FAC_EMPTY	'3F'H	-	-	-	-	Missing facilities
FAC_FST_SEL	'02'H	-	'01'H	'80'H	-	Fast Select no restriction
FAC_FST_SELA	'02'H	-	'01'H	'01'H	-	Fast Select Reverse Charging
FAC_FST_SELR	'02'H	-	'01'H	'C0'H	-	Fast Select with restriction
FAC_LNG_110	'6E'H	FACS_110	-	-	-	110 octets of correct facilities PIXIT 2.6d
#						
FAC_MPKT_SIZ	'03'H	-	'42'H	MAX_PKT_SZ	MAX_PKT_SZ	Flow control parm. neg., pkt size
FAC_NOT_ALL	'02'H	-	'EE'H	'00'H	-	TST to IUT facility not allowed
FAC_NUI	F_NUI_L	F_NUI	-	-	-	Network user id. PIXIT 2.12
FAC_PACKET	'03'H	-	'42'H	?	?	IUT to TST packet size
FAC_SHORT	'02'H	-	'01'H	-	-	Short facilities
FAC_THRUP	'02'H	-	'02'H	THRUP	-	Throughput class neg. PIXIT 2.10
FAC_TRDELAY	'03'H	-	'49'H	TRNS_DELAY_1	TRNS_DELAY_2	Transit Delay PIXIT 2.11
FAC_WINDOW	'03'H	-	'43'H	?	?	IUT to TST window size
FAC_ZERO	'00'H	-	-	-	-	Facility length zero

PDU Field Group Constraints Declarations							
Field Group Name: HEADER							
Constraint Name	Field Name						Comments
	LCGN	FORMAT	DBIT	QBIT	LCN		
HDR_ANY_D (LG, LN :BS)	LG	GFI_B	?	0	LN	Any D bit setting; basic format	
HDR_ANY_Q (LG, LN :BS)	LG	GFI_B	0	?	LN	Any Q bit setting; basic format	
HDR_G (LG, LN :BS)	LG	GFI_B	0	0	LN	General Header basic format, D-bit and Q-bit set to 0	
HDR_G_ANY	?	GFI_B	0	0	?	General Header basic format, D-bit and Q-bit set to 0, any LCI	
HDR_NIL	0	0	0	0	0	Q and/or D bit set; basic format	
HDR_QD (Q, D, LG, LN :BS)	LG	GFI_B	D	Q	LN	No logical channel number	
HDR_SHRT (Q, D, LG :BS)	LG	GFI_B	D	Q	-	Extended sequence numbering	
HDR_X (LG, LN :BS)	LG	GFI_X	0	0	LN		
HDR_ZERO	0	GFI_B	0	0	0		

STANDARDSISO.COM · Click to view the full PDF of ISO/IEC 8882-3:1991

Packet Layer Group 1: State R1 Packet Layer Ready

PLG 1 contains the test cases for the RESTART STATE r1.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R1/PROPER/P01				
Identifier: P1_101				
Purpose: Verify the IUT accepts a Restart Indication in R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC)				
!RESTART START TD		STRT_DCE		
[DISC_AT_DL]				
?RESTARTC CANCEL		STRTC_1	P	
?RESTART CANCEL		STRT_1DTEA	P	
?TIMEOUT TD			P	
?OTHERWISE CANCEL			P	
[NOT DISC_AT_DL]				
?RESTARTC CANCEL		STRTC_1	(P)	
+R1_POSTAMBLE				
?RESTART CANCEL		STRT_1DTEA	(P)	
+R1_POSTAMBLE				
?OTHERWISE CANCEL			F	
?TIMEOUT TD			F	
Extended Comments:				
1) This RESTART may be sent in response to the received RESTART or may be a result of a Data Link re-initialization procedure.				

STANDARDSISO.COM · Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R1/PROPER/P02				
Identifier: P1_102				
Purpose: Verify the IUT does not respond to a Diagnostic packet received in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !DIAG START TD ?TIMEOUT TD +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		DGN_ZERO	(P) F	1
Extended Comments: 1) no response				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P01A				
Identifier: P1_201A				
Purpose: Verify the IUT discards an Incoming Call packet with LCI=0 while in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC)				
!CALL START TD		CALL_ZERO	(P)	1
?TIMEOUT TD				
+R1_POSTAMBLE				
?RESTART [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG36)) OR CAUSE_EQ_128] CANCEL		STRT_1DTEA		2
!RESTARTC		STRIC	I	
?OTHERWISE CANCEL			F	
Extended Comments:				
1) no response				
2) no information, not allowed, unassigned LCI				
The acceptance of Restart in response to a Call Request on LCI=0 is for further study.				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P01B				
Identifier: P1_201B				
Purpose: Verify the IUT discards a Call Connected packet with LCI=0 while in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC)				
!ACCEPT START TD ?TIMEOUT TD		ANSR_ZERO	(P)	1
+R1_POSTAMBLE				
?RESTART [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG36)) OR CAUSE_EQ_128] CANCEL		STRT_1DTEA		2
!RESTARTC		STRTC	I	
?OTHERWISE CANCEL			F	
Extended Comments:				
1) no response				
2) no information, not allowed, unassigned LCI				
The acceptance of Restart in response to Call Connected packet on LCI=0 is for further study.				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P01C				
Identifier: P1_201C				
Purpose: Verify the IUT discards a Clear Indication packet with LCI=0 while in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC)				
!CLEAR START TD ?TIMEOUT TD		CLR_ZERO	(P)	1
+R1_POSTAMBLE				
?RESTART [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG36)) OR CAUSE_EQ_128] CANCEL		STRT_1DTEA		2
!RESTARTC		STRTC	I	
?OTHERWISE CANCEL			F	
Extended Comments :				
1) no response				
2) no information, not allowed, unassigned LCI				
The acceptance of Restart in response to a Clear Indication on LCI=0 is for further study.				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P01D				
Identifier: P1_201D				
Purpose: Verify the IUT discards a Clear Confirmation packet with LCI equal to zero while in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC)				
!CLEARC START TD ?TIMEOUT TD		CLRC_ZERO	(P)	1
+R1_POSTAMBLE				
?RESTART [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG36)) OR CAUSE_EQ_128] CANCEL		STRT 1DTEA		2
!RESTARTC ?OTHERWISE CANCEL		STRTC	I F	
Extended Comments:				
1) no response				
2) no information, not allowed, unassigned LCI				
The acceptance of Restart in response to a Clear Confirmation on LCI=0 is for further study.				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P01E				
Identifier: P1_201E				
Purpose: Verify the IUT discards a Data packet with LCI=0 while in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC)				
!DATA START TD		DAT_ZERO	(P)	1
?TIMEOUT TD				
+R1_POSTAMBLE				
?RESTART [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG36)) OR CAUSE_EQ_128] CANCEL		STRT_1DTEA		2
!RESTARTC		STRTC	I	
?OTHERWISE CANCEL			F	
Extended Comments :				
1) no response				
2) no information, not allowed, unassigned LCI				
The acceptance of Restart in response to a Data packet on LCI=0 is for further study.				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P01F				
Identifier: P1_201F				
Purpose: Verify the IUT discards an Interrupt packet with LCI=0 while in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC)				
!INT START TD		INT_ZERO	(P)	1
?TIMEOUT TD				
+R1_POSTAMBLE				
?RESTART [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG36)) OR CAUSE_EQ_128] CANCEL		STRT_1DTEA		1
!RESTARTC		STRTC	I	
?OTHERWISE CANCEL			F	
Extended Comments:				
1) no response				
2) no information, not allowed, unassigned LCI				
The acceptance of Restart in response to an Interrupt packet on LCI=0 is for further study.				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P01G				
Identifier: P1_201G				
Purpose: Verify the IUT discards an Interrupt Confirmation packet with LCI=0 while in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC)				
!INTC START TD		INTC_ZERO	(P)	1
?TIMEOUT TD				
+R1_POSTAMBLE				
?RESTART [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG36)) OR CAUSE_EQ_128] CANCEL		STRT_1DTEA		2
!RESTARTC		STRTC	I	
?OTHERWISE CANCEL			F	
Extended Comments:				
1) no response				
2) no information, not allowed, unassigned LCI				
The acceptance of Restart in response to a Interrupt Confirmation on LCI=0 is for further study.				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P01H				
Identifier: P1_201H				
Purpose: Verify the IUT discards an Receiver Ready (RR) packet with LCI=0 while in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RR START TD ?TIMEOUT TD # +R1_POSTAMBLE ?RESTART [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG36)) OR CAUSE_EQ_128] CANCEL # # !RESTARTC ?OTHERWISE CANCEL		RR_ZERO STRT_1DTEA STRTC	(P) I F	no respon se no info, not allow ed, unass igned LCI
Extended Comments : The acceptance of Restart in response to an Receiver Ready packet on LCI=0 is for further study.				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P01I Identifier: P1_201I Purpose: Verify the IUT discards an Receiver Not Ready (RNR) packet with LCI=0 while in state R1 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RNR START TD ?TIMEOUT TD +R1_POSTAMBLE ?RESTART [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG36)) OR CAUSE_EQ_128] CANCEL !RESTARTC ?OTHERWISE CANCEL		RNR_ZERO STRT_1DTEA STRTC	(P) I F	1 2
Extended Comments : 1) no response 2) no information, not allowed, unassigned LCI The acceptance of Restart in response to an Receive Not Ready on LCI=0 is for further study.				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P01J Identifier: P1_201J Purpose: Verify the IUT discards a Reset Indication packet with LCI=0 while in state R1 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC)				
!RESET START TD ?TIMEOUT TD		RST_ZERO	(F)	1
+R1_POSTAMBLE				
?RESTART [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG36)) OR CAUSE_EQ_128] CANCEL		STRT_1DTEA		2
!RESTARTC		STRTC	I	
?OTHERWISE CANCEL			F	
Extended Comments: 1) no response 2) no information, not allowed, unassigned LCI The acceptance of Restart in response to a Reset Indication on LCI=0 is for further study.				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P01K				
Identifier: P1_201K				
Purpose: Verify the IUT discards a Reset Confirmation packet with LCI=0 while in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC)				
!RESETC START TD ?TIMEOUT TD		RSTC_ZERO	(P)	1
+R1_POSTAMBLE				
?RESTART [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG36)) OR CAUSE_EQ_128] CANCEL		STRT_1DTEA		2
!RESTARTC ?OTHERWISE CANCEL		STRTC	I F	
Extended Comments:				
1) no response				
2) no information, not allowed, unassigned LCI				
The acceptance of Restart in response to a Reset Confirmation on LCI=0 is for further study.				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P01L				
Identifier: P1_201L				
Purpose: Verify the IUT discards a Reject packet with LCI=0 while in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC)				
!REJ START TD ?TIMEOUT TD		REJ_ZERO	(P)	1
+R1_POSTAMBLE				
?RESTART [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG36)) OR CAUSE_EQ_128] CANCEL		STRT_1DTEA		2
!RESTARTC		STRTC	I	
?OTHERWISE CANCEL			F	
Extended Comments: 1) no response 2) no information, not allowed, unassigned LCI The acceptance of Restart in response to a Reject packet on LCI=0 is for further study.				

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P02				
Identifier: P1_202				
Purpose: Verify the IUT discards or Restarts a too short Restart Indication (no cause code or diagnostic fields) packet received in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC)				
!RESTART START TD ?TIMEOUT TD		STRT_NR	(P)	1 2
+R1_POSTAMBLE				3
?RESTART [CCITT_80 OR CCITT_84] CANCEL		STRT_1DTEA		
!RESTARTC		STRTC	(P)	
+R1_POSTAMBLE				
+RSTRT_UNEXPECTED				
?OTHERWISE CANCEL			F	4
Extended Comments: 1) too short Restart 2) no response 3) Received no response to a too short Restart. 4) for ISO 8208 a received Restart is Inconclusive				

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P03				
Identifier: P1_203				
Purpose: Verify the IUT discards or Restarts a too long Restart (one octet after the Diagnostic field) received in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
#R1_PREAMBLE (ANY_VC)				
!RESTART START TD ?TIMEOUT TD		STRT_LO	(P)	no response
+R1_POSTAMBLE				1
?RESTART [CCITT_80 OR CCITT_84] CANCEL !RESTARTC		STRT_1DTEA STRTC	(P)	
+R1_POSTAMBLE				
+RSTRT_UNEXPECTED ?OTHERWISE CANCEL			F	2
Extended Comments:				
1) Received no response to a too long Restart				
2) for ISO 8208 a received Restart is Inconclusive				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P04				
Identifier: P1_204				
Purpose: Verify the IUT discards or Restarts a too long Restart Confirmation (one octet appended to the end of the packet) received in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC)				
!RESTARTC START TD ?TIMEOUT TD		STRTC_LO	(P)	1 2
+R1_POSTAMBLE				
?RESTART [CCITT_80 OR CCITT_84] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR #DIAG39)) OR CAUSE_EQ_128] CANCEL		STRT_1DTEA		3
!RESTARTC		STRTC	(P)	
+R1_POSTAMBLE				
+RSTRT_UNEXPECTED ?OTHERWISE CANCEL			F	4
Extended Comments :				
1) Restart Confirmation packet of length four octets 2) Received no response to a too long Restart Confirmation 3) no information, not allowed, too long 4) for ISO 8208 a received Restart is Inconclusive				

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P06				
Identifier: P1_206				
Purpose: Verify the IUT discards a Diagnostic packet with an assigned LCN not equal to zero received in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !DIAG START TD ?TIMEOUT TD +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL		DGN_0 (LCI)	(P)	1 2
Extended Comments: 1) DIAG LCI <> 0 2) no response This test case is not applicable to CCITT X.25 1980 or 1984 IUTs.				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P07				
Identifier: P1_207				
Purpose: Verify the IUT discards a too short Diagnostic packet (no diagnostic or explanation fields) received in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !DIAG START TD ?TIMEOUT TD +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL		DGN_SHT	(P) F	1
Extended Comments: 1) no response				
This test case is not applicable to CCITT X.25 1980 or 1984 IUTs.				

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P08				
Identifier: P1_208				
Purpose: Verify the IUT discards a too long Diagnostic packet (explanation field of three octets plus one appended octet) received in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !DIAG START TD ?TIMEOUT TD +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL		DGN_L (0,0)	(P) F	1
Extended Comments: 1) no response				
This test case is not applicable to CCITT X.25 1980 or 1984 IUTs.				

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P09				
Identifier: P1_209				
Purpose: Verify the IUT discards packet of length one octet received in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !ERROR START TD ?TIMEOUT TD +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL		ERR_A	(P)	1
Extended Comments: 1) no response				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P10				
Identifier: P1_210				
Purpose: Verify the IUT discards Restart Indications with an invalid GFI received in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (ANY_VC) !RESTART START TD ?TIMEOUT TD +R1_POSTAMBLE [SEQ_MODULO = 8] (GF := 2) +SUBTREE +SUBTREE_1 [SEQ_MODULO = 128] (GF := 1) +SUBTREE +SUBTREE_1 +RSTRT_UNEXPECTED ?OTHERWISE CANCEL SUBTREE_1 (GF := 3) REPEAT SUBTREE UNTIL [COUNT = 14] +R1_POSTAMBLE SUBTREE !RESTART_1 (GFI := GF) (GF := GF + 1) #START TD ?TIMEOUT TD +R1_POSTAMBLE (COUNT := COUNT + 1) +RSTRT_UNEXPECTED ?OTHERWISE CANCEL </pre>		<pre> STRT_NIL STRT_UDF </pre>	<pre> F (P) F </pre>	<pre> no response 1 no response continue </pre>
Extended Comments: 1) RESTARTs with GFI values 3 to 15 are transmitted.				

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P11A				
Identifier: P1_211A				
Purpose: Verify the IUT discards a Incoming Call with unassigned LCI received in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !CALL START TD ?TIMEOUT TD +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL		CALL_0 (LCI)	(P) F	no response
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P11B				
Identifier: P1_211B				
Purpose: Verify the IUT discards a Call Connected packet with unassigned LCI received in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !ACCEPT START TD ?TIMEOUT TD +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL		ANSR_0 (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P11C				
Identifier: P1_211C				
Purpose: Verify the IUT discards a Clear Indication with unassigned LCI received in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !CLEAR START TD ?TIMEOUT TD +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL		CLR_0 (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P11D				
Identifier: P1_211D				
Purpose: Verify the IUT discards a Clear Confirmation with unassigned LCI received in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !CLEARC START TD ?TIMEOUT TD +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL		CLRC_0 (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P11E				
Identifier: P1_211E				
Purpose: Verify the IUT discards a Data packet with unassigned LCI received in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !DATA START TD ?TIMEOUT TD +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL		D_ONE (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P11F				
Identifier: P1_211F				
Purpose: Verify the IUT discards a Interrupt packet with unassigned LCI received in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !INT START TD ?TIMEOUT TD +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL		INT_0 (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P11G				
Identifier: P1_211G				
Purpose: Verify the IUT discards a Interrupt Confirmation with unassigned LCI received in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !INTC START TD ?TIMEOUT TD +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL		INTC_0 (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P11H				
Identifier: P1_211H				
Purpose: Verify the IUT discards a Receive Ready (RR) with unassigned LCI received in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !RR START TD ?TIMEOUT TD +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL		RR_0 (LCI)	(P) F	no response
Extended Comments :				

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P11I				
Identifier: P1_211I				
Purpose: Verify the IUT discards a Receive Not Ready (RNR) with unassigned LCI received in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !RNR START TD ?TIMEOUT TD +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL		RNR_0 (LCI)	(P) F	no response
Extended Comments :				

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P11J				
Identifier: P1_211J				
Purpose: Verify the IUT discards a Reset Indication with unassigned LCI received in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !RESET START TD ?TIMEOUT TD +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL		RST_0 (LCI)	(P)	no response
			F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P11K				
Identifier: P1_211K				
Purpose: Verify the IUT discards a Reset Confirmation with unassigned LCI received in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !RESETC START TD ?TIMEOUT TD +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL		RSTC_0 (LCI)	(P)	no response
			F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R1/IMPROPER/P11L				
Identifier: P1_211L				
Purpose: Verify the IUT discards a Reject packet with unassigned LCI received in state R1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !REJ START TD ?TIMEOUT TD +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL		REJ_0 (LCI)	(P) F	no response
Extended Comments :				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R1/ INOPPORTUNE/P01				
Identifier: P1_301				
Purpose: Verify the IUT restarts a Restart Confirmation with the correct diagnostic code received in state R1.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTARTC START TD ?RESTART [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG17)) OR CAUSE_EQ_128] CANCEL !RESTARTC +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL TD		STRTC STRT_1DTEA STRTC	 (P) F F	1
Extended Comments:				
1) no information, packet invalid, invalid for r1				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Packet Layer Group 2: State R2 DTE Restart Request

PLG 2 contains the test cases for the RESTART STATE r2.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R2/PROPER/P01				
Identifier: P2_101				
Purpose: Verify the R2 to R1 transition via Restart Indication				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) +R2_PREAMBLE !RESTART +R1_POSTAMBLE		STRT_DCE	(P)	1
Extended Comments:				
1) Restart collision at the IUT				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/PROPER/P02				
Identifier: P2_102				
Purpose: Verify the R2 to R1 transition via Restart Confirmation				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) +R2_PREAMBLE !RESTARTC +R1_POSTAMBLE		STRTC	(P)	1
Extended Comments:				
1) send Restart Confirmation				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/PROPER/P03				
Identifier: P2_103				
Purpose: Verify the IUT does not respond to a Diagnostic packet received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (NO_LC) +R2_PREAMBLE !DIAG START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		DGN_ZERO	(P) F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P01				
Identifier: P2_201				
Purpose: Verify the IUT discards a packet of length two octets received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (NO_LC) +R2_PREAMBLE !ERROR START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		ERR_SHT (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/ IMPROPER/P02A				
Identifier: P2_202A				
Purpose: Verify the IUT discards an Incoming Call with LCI=0 received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (NO_IC) +R2_PREAMBLE !CALL START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		CALL_ZERO	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/ IMPROPER/P02B				
Identifier: P2_202B				
Purpose: Verify the IUT discards a Call Connected packet with LCI=0 received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (NO_IC) +R2_PREAMBLE !ACCEPT START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		ANSR_ZERO	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P02C				
Identifier: P2_202C				
Purpose: Verify the IUT discards a Clear Indication with LCI=0 received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (NO_LC) +R2_PREAMBLE !CLEAR START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		CLR_ZERO	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P02D				
Identifier: P2_202D				
Purpose: Verify the IUT discards a Clear Confirmation with LCI=0 received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (NO_LC) +R2_PREAMBLE !CLEARC START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		CLRC_ZERO	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P02E				
Identifier: P2_202E				
Purpose: Verify the IUT discards a Data packet with LCI=0 received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (NO_LC) +R2_PREAMBLE !DATA START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		DAT_ZERO	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P02F				
Identifier: P2_202F				
Purpose: Verify the IUT discards an Interrupt packet with LCI=0 received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (NO_LC) +R2_PREAMBLE !INT START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		INT_ZERO	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/ IMPROPER/P02G				
Identifier: P2_202G				
Purpose: Verify the IUT discards an Interrupt Confirmation with LCI=0 received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (NO_LC) +R2_PREAMBLE !INTC START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		INTC_ZERO	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/ IMPROPER/P02H				
Identifier: P2_202H				
Purpose: Verify the IUT discards a Receive Ready (RR) with LCI=0 received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (NO_LC) +R2_PREAMBLE !RR START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		RR_ZERO	(P) F	no response
Extended Comments:				

STANDARDSP150.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P02I				
Identifier: P2_202I				
Purpose: Verify the IUT discards a Receive Not Ready (RNR) with LCI=0 received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (NO_LC) +R2_PREAMBLE !RNR START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		RNR_ZERO	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P02J				
Identifier: P2_202J				
Purpose: Verify the IUT discards a Reset Indication with LCI=0 received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (NO_LC) +R2_PREAMBLE !RESET START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		RST_ZERO	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P02K				
Identifier: P2_202K				
Purpose: Verify the IUT discards a Reset Confirmation with LCI=0 received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (NO_LC) +R2_PREAMBLE !RESETC START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		RSTC_ZERO	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P02L				
Identifier: P2_202L				
Purpose: Verify the IUT discards a Reject packet with LCI=0 received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (NO_LC) +R2_PREAMBLE !REJ START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		REJ_ZERO	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P03A				
Identifier: P2_203A				
Purpose: Verify the IUT discards an unidentified packet on logical channel zero received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (NO_LC) +R2_PREAMBLE !ERROR START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		ERR_ZERO	(P) F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P03B				
Identifier: P2_203B				
Purpose: Verify the IUT discards an unidentified packet on a valid logical channel received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) +R2_PREAMBLE !ERROR START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		ERR_B (LCI)	(P) F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P03C				
Identifier: P2_203C				
Purpose: Verify the IUT discards an unidentified packet on an unassigned logical channel received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) +R2_PREAMBLE !ERROR START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		ERR_B (LCI)	(P) F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P04				
Identifier: P2_204				
Purpose: Verify the IUT discards a Restart Indication with LCI not equal to zero received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE ((ANY_VC)) +R2_PREAMBLE !RESTART START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		STRT_NZ (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P05				
Identifier: P2_205				
Purpose: Verify the IUT discards a Restart Confirmation with LCI not equal to zero received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) +R2_PREAMBLE !RESTARTC START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		STRTC_NZ (LCI)	(P) F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P06				
Identifier: P2_206				
Purpose: Verify the IUT Restarts a too short Restart Indication received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (NO_LC) +R2_PREAMBLE !RESTART START TD ?RESTART [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG38)) OR CAUSE_EQ_128] CANCEL #TD +R2_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL TD		STRT_NR STRT_1DTEA	(P) F F	1 2
Extended Comments:				
1) no cause or diagnostic fields				
2) no information, not allowed, too short				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P07				
Identifier: P2_207				
Purpose: Verify the IUT Restarts a too long Restart Indication received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (NO_LC) +R2_PREAMBLE !RESTART START TD ?RESTART [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG39)) OR CAUSE_EQ_128] CANCEL #TD +R2_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL TD		STRT_LO STRT_1DTEA	(E) F F	1 2
Extended Comments: 1) long Restart 2) no information, not allowed, too long				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P08				
Identifier: P2_208				
Purpose: Verify the IUT Restarts a too long Restart Confirmation received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (NO_IC) +R2_PREAMBLE !RESTARTC START TD ?RESTART [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG39)) OR CAUSE_EQ_128] CANCEL #TD +R2_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL TD		STRTC_LO STRT_1DTEA	(P) F F	1
Extended Comments: 1) no information, not allowed, too long				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P10				
Identifier: P2_210				
Purpose: Verify the IUT does not respond to a Diagnostic packet on an assigned LCI not equal to zero received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) +R2_PREAMBLE !DIAG START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		DGN_0 (LCI)	(P) F	1
Extended Comments: 1) transmit a Diagnostic packet				
This test case is not applicable to CCITT X.25 1980 and 1984 IUTs.				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P11				
Identifier: P2_211				
Purpose: Verify the IUT discards a too short Diagnostic packet (no Diagnostic code or Explanation fields) received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (NO_LC) +R2_PREAMBLE !DIAG START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		DGN_SHT	(P) F	1
Extended Comments: 1) transmit a Diagnostic packet				
This test case is not applicable to CCITT X.25 1980 and 1984 IUTs.				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P12				
Identifier: P2_212				
Purpose: Verify the IUT discards a too long Diagnostic packet (explanation field of three octets plus one appended octet) received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (NO_LC) +R2_PREAMBLE !DIAG START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		DGN_L(0,0)	(P) F	1 2
Extended Comments: 1) transmit a Diagnostic packet 2) no response				
This test case is not applicable to CCITT X.25 1980 and 1984 IUTs.				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P13				
Identifier: P2_213				
Purpose: Verify the IUT discards a too short packet (length of one octet) received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (NO_LC) +R2_PREAMBLE !ERROR START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		ERR_A	(P) F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P14				
Identifier: P2_214				
Purpose: Verify the IUT discards Restart Indications with an invalid GFI received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (ANY_VC) +R2_PREAMBLE !RESTART START TD ?TIMEOUT TD !RESTARTC +R1_POSTAMBLE +R2_PREAMBLE [SEQ_MODULO = 8] (GF := 2) +SUBTREE +SUBTREE_1 [SEQ_MODULO = 128] (GF := 1) +SUBTREE +SUBTREE_1 ?OTHERWISE CANCEL TD SUBTREE_1 (GF := 3) REPEAT SUBTREE UNTIL [COUNT = 14] +R2_POSTAMBLE SUBTREE !RESTART_1 (GFI := GF) (GF:=GF+1) START TD ?TIMEOUT TD +R2_POSTAMBLE +R2_PREAMBLE (COUNT := COUNT + 1) ?OTHERWISE CANCEL TD </pre>		<pre> STRT_NIL STRC STRT_UDF </pre>	<pre> F (P) F </pre>	<pre> no response 1 no response continue </pre>
Extended Comments: 1) RESTARTs with GFI values 3 to 15 are transmitted.				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P15A				
Identifier: P2_215A				
Purpose: Verify the IUT discards an Incoming Call on an unassigned LCI received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) +R2_PREAMBLE !CALL START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		CALL_0 (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P15B				
Identifier: P2_215B				
Purpose: Verify the IUT discards a Call Connected packet on an unassigned LCI received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) +R2_PREAMBLE !ACCEPT START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		ANSR_0 (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P15C				
Identifier: P2_215C				
Purpose: Verify the IUT discards a Clear Indication on an unassigned LCI received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) +R2_PREAMBLE !CLEAR START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		CLR_0 (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P15D				
Identifier: P2_215D				
Purpose: Verify the IUT discards a Clear Confirmation on an unassigned LCI received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) +R2_PREAMBLE !CLEARC START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		CLRC_0 (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P15E				
Identifier: P2_215E				
Purpose: Verify the IUT discards a Data packet on an unassigned LCI received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) +R2_PREAMBLE !DATA START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		D_ONE (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P15F				
Identifier: P2_215F				
Purpose: Verify the IUT discards a Interrupt packet on an unassigned LCI received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) +R2_PREAMBLE !INT START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		INT_0 (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P15G				
Identifier: P2_215G				
Purpose: Verify the IUT discards an Interrupt Confirmation on an unassigned LCI received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) +R2_PREAMBLE !INTC START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		INTC_0 (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P15H				
Identifier: P2_215H				
Purpose: Verify the IUT discards a Receive Ready (RR) on an unassigned LCI received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) +R2_PREAMBLE !RR START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		RR_0 (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P15I				
Identifier: P2_215I				
Purpose: Verify the IUT discards a Receive Not Ready (RNR) on an unassigned LCI received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) +R2_PREAMBLE !RNR START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		RNR_0 (LCI)	(P) F	no response
Extended Comments :				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P15J				
Identifier: P2_215J				
Purpose: Verify the IUT discards a Reset Indication on an unassigned LCI received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) +R2_PREAMBLE !RESET START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		RST_0 (LCI)	(P) F	
Extended Comments :				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/ IMPROPER/P15K				
Identifier: P2_215K				
Purpose: Verify the IUT discards a Reset Confirmation on an unassigned LCI received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) +R2_PREAMBLE !RESETC START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		RSTC_0 (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/ IMPROPER/P15L				
Identifier: P2_215L				
Purpose: Verify the IUT discards a Reject packet on an unassigned LCI received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) +R2_PREAMBLE !REJ START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		REJ_0 (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P15M				
Identifier: P2_215M				
Purpose: Verify the IUT discards a Restart Indication on an unassigned LCI received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) +R2_PREAMBLE !RESTART START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		STRT_NZ (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/IMPROPER/P15N				
Identifier: P2_215N				
Purpose: Verify the IUT discards a Restart Confirmation on an unassigned LCI received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) +R2_PREAMBLE !RESTARTC START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		STRTC_NZ (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/ INOPPORTUNE/P01A				
Identifier: P2_301A				
Purpose: Verify the IUT discards an Incoming Call received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) +R2_PREAMBLE !CALL START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		CALL_0 (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/ INOPPORTUNE/P01B				
Identifier: P2_301B				
Purpose: Verify the IUT discards a Call Connected packet received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) +R2_PREAMBLE !ACCEPT START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		ANSR_0 (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/INOPPORTUNE/P01C				
Identifier: P2_301C				
Purpose: Verify the IUT discards a Clear Indication received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) +R2_PREAMBLE !CLEAR START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		CLR_0 (LCI)	(P) F	no response
Extended Comments :				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/INOPPORTUNE/P01D				
Identifier: P2_301D				
Purpose: Verify the IUT discards a Clear Confirmation received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) +R2_PREAMBLE !CLEARC START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		CLRC_0 (LCI)	(P) F	no response
Extended Comments :				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/ INOPPORTUNE/P01E				
Identifier: P2_301E				
Purpose: Verify the IUT discards a Data packet received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) +R2_PREAMBLE !DATA START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		D_ONE (LCI)	(P) F	no response
Extended Comments :				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/ INOPPORTUNE/P01F				
Identifier: P2_301F				
Purpose: Verify the IUT discards an Interrupt received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) +R2_PREAMBLE !INT START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		INT_0 (LCI)	(P) F	no response
Extended Comments :				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/ INOPPORTUNE/P01G				
Identifier: P2_301G				
Purpose: Verify the IUT discards an Interrupt Confirmation received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) +R2_PREAMBLE !INTC START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		INTC_0 (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/ INOPPORTUNE/P01H				
Identifier: P2_301H				
Purpose: Verify the IUT discards a Receive Ready (RR) received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) +R2_PREAMBLE !RR START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		RR_0 (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/ INOPPORTUNE/P01I				
Identifier: P2_301I				
Purpose: Verify the IUT discards a Receive Not Ready (RNR) received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) +R2_PREAMBLE !RNR START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		RNR_0 (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/ INOPPORTUNE/P01J				
Identifier: P2_301J				
Purpose: Verify the IUT discards a Reset Indication received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) +R2_PREAMBLE !RESET START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		RST_0 (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/ INOPPORTUNE/P01K				
Identifier: P2_301K				
Purpose: Verify the IUT discards a Reset Confirmation received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) +R2_PREAMBLE !RESETC START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		RSTC_0 (LCI)	(P) F	no response
Extended Comments :				

Test Case Dynamic Behaviour				
Reference: PACKET/R2/ INOPPORTUNE/P01L				
Identifier: P2_301L				
Purpose: Verify the IUT discards a Reject packet received in state R2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) +R2_PREAMBLE !REJ START TD ?TIMEOUT TD +R2_POSTAMBLE ?OTHERWISE CANCEL TD		REJ_0 (LCI)	(P) F	no response
Extended Comments :				

Packet Layer Group 3: State R3 DXE Restart Indication

PLG 3 contains the test cases for the RESTART r3. PLG 3 is a transient state and may not be observable. This packet layer test group is executed only if the IUT implements STATE r3 such that it is observable.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/PROPER/P01				
Identifier: P3_101				
Purpose: Verify the IUT accepts a valid Diagnostic packet received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !DIAG ?TIMEOUT TO_R3 ?RESTARTC CANCEL +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE DGN_ZERO STRTC_1 STRT_1DTEA	(P) (P) F F	1
Extended Comments: 1) Put the IUT into state R3				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P01				
Identifier: P3_201				
Purpose: Verify the IUT Restarts or discards a packet of length two octets received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !ERROR [ISO] START TD_RESP, CANCEL TO_R3, #CANCEL TD ?RESTART [(CAUSE_EQ_0 AND # (DIAG0 OR DIAG32 OR DIAG33 OR DIAG38)) OR #CAUSE_EQ_128] CANCEL +R1_POSTAMBLE ?RESTART ?RESTARTC CANCEL ?TIMEOUT TD_RESP ?OTHERWISE CANCEL [CCITT_80 OR CCITT_84] ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE ERR_SHT (LCI) STRT_1DTEA STRT_1DTEA STRTC_1 STRTC_1 STRT_1DTEA	(P) I F F F (P) (P)	2 1
Extended Comments : 1) see CCITT X.25 Table C-2; 2) see ISO 8208 Figure 5-C				

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P02A				
Identifier: P3_202A				
Purpose: Verify the IUT discards an Incoming Call with LCI=0 received state in R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !CALL ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE CALL_ZERO STRTC_1 STRT_1DTEA	(P) (P) F F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P02B				
Identifier: P3_202B				
Purpose: Verify the IUT discards a Call Connected packet with LCI=0 received state in R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !ACCEPT ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE ANSR_ZERO STRTC_1 STRT_1DTEA	 (P) F F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P02C				
Identifier: P3_202C				
Purpose: Verify the IUT discards a Clear Indication with LCI=0 received state in R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !CLEAR ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE CLR_ZERO STRTC_1 STRT_1DTEA	(P) (P) F F	
Extended Comments :				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P02D				
Identifier: P3_202D				
Purpose: Verify the IUT discards a Clear Confirmation with LCI=0 received state in R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !CLEARC ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE CLRC_ZERO STRTC_1 STRT_1DTEA	(P) F F	
Extended Comments :				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P02E				
Identifier: P3_202E				
Purpose: Verify the IUT discards a Data packet with LCI=0 received state in R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !DATA ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE DAT_ZERO STRTC_1 STRT_1DTEA	(P) (P) F F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P02F				
Identifier: P3_202F				
Purpose: Verify the IUT discards an Interrupt packet with LCI=0 received state in R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !INT ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE INT_ZERO STRTC_1 STRT_1DTEA	(P) (P) F F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P02G				
Identifier: P3_202G				
Purpose: Verify the IUT discards an Interrupt Confirmation with LCI=0 received state in R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !INTC ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED </pre>		<pre> STRT_DCE INTC_ZERO STRTC_1 STRT_1DTEA </pre>	<pre> (P) (P) F F </pre>	
Extended Comments :				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P02H				
Identifier: P3_202H				
Purpose: Verify the IUT discards a Receive Ready (RR) with LCI=0 received state in R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !RR ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE RR_ZERO STRTC_1 STRT_1DTEA	(P) (P) F F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P02I				
Identifier: P3_202I				
Purpose: Verify the IUT discards a Receive Not Ready (RNR) packet with LCI=0 received state in R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !RNR ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED </pre>		<pre> STRT_DCE RNR_ZERO STRTC_1 STRT_1DTEA </pre>	<pre> (P) (P) F F </pre>	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P02J				
Identifier: P3_202J				
Purpose: Verify the IUT discards a Reset Indication with LCI=0 received state in R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !RESET ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE RST_ZERO STRTC_1 STRT_1DTEA	(P) (P) F F	
Extended Comments :				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P02K				
Identifier: P3_202K				
Purpose: Verify the IUT discards a Reset Confirmation with LCI=0 received state in R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !RESETC ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE RSTC_ZERO STRTC_1 STRT_1DTEA	(P) F F	
Extended Comments :				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P02L				
Identifier: P3_202L				
Purpose: Verify the IUT discards a Reject packet with LCI=0 received state in R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP		STRT_DCE		
!REJ ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD		REJ_ZERO STRTC_1	(P)	
+R1_POSTAMBLE ?RESTART CANCEL		STRT_1DTEA	(P)	
+R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL			F F	
+R3_UNEXPECTED +R3_UNEXPECTED				
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P03A				
Identifier: P3_203A				
Purpose: Verify the IUT Restarts or discards an unidentified packet on logical channel zero received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP		STRT_DCE		
!ERROR [ISO] START TD_RESP, CANCEL TO_R3, #CANCEL TD ?RESTART [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG32 OR DIAG33)) OR #CAUSE_EQ_128] CANCEL		ERR_ZERO		1
+R1_POSTAMBLE		STRT_1DTEA	(P)	
?RESTART CANCEL		STRT_1DTEA	I	
?RESTARTC CANCEL ?TIMEOUT TD_RESP ?OTHERWISE CANCEL		STRTC_1	F F F	
[CCITT_80 OR CCITT_84] ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD		STRTC_1	(P)	2
+R1_POSTAMBLE		STRT_1DTEA	(P)	
?RESTART CANCEL		STRT_1DTEA	(P)	
+R1_POSTAMBLE				
?TIMEOUT TD ?OTHERWISE CANCEL			F F	
+R3_UNEXPECTED +R3_UNEXPECTED				
Extended Comments: 1) see ISO 8208 Figure 5-C 2) see CCITT X.25 Table C-2				

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P03B				
Identifier: P3_203B				
Purpose: Verify the IUT Restarts or discards an unidentified packet on a valid logical channel received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !ERROR [ISO] START TD_RESP ?RESTART [(CAUSE_EQ_0 AND # (DIAG0 OR DIAG32 OR DIAG33)) OR #CAUSE_EQ_128] CANCEL +R1_POSTAMBLE ?RESTART CANCEL ?RESTARTC CANCEL ?TIMEOUT TD_RESP ?OTHERWISE CANCEL [CCITT_80 OR CCITT_84] ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE ERR_B (LCI) STRT_1DTEA STRT_1DTEA STRTC_1 STRTC_1 STRT_1DTEA	(P) I F F F (P) (P) F F	1 2
Extended Comments: 1) see ISO 8208 Figure 5-C 2) see CCITT X.25 Table C-2				

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P03C				
Identifier: P3_203C				
Purpose: Verify the IUT Restarts or discards an unidentified packet on an unassigned logical channel received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP		STRT_DCE		
!ERROR [ISO] START TD_RESP ?RESTART [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG32 OR DIAG33)) OR #CAUSE_EQ_128] CANCEL		ERR_B (LCI)		1
+ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE		STRT_1DTEA	(P)	
?RESTART CANCEL		STRT_1DTEA	I	
?RESTARTC CANCEL ?TIMEOUT TD_RESP ?OTHERWISE CANCEL		STRTC_1	F F F	
[CCITT_80 OR CCITT_84] ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD		STRTC_1	(P)	2
+R1_POSTAMBLE				
?RESTART CANCEL		STRT_1DTEA	(P)	
+ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE				
?TIMEOUT TD ?OTHERWISE CANCEL			F F	
+R3_UNEXPECTED +R3_UNEXPECTED				
Extended Comments: 1) see ISO 8208 Figure 5-C 2) see CCITT X.25 Table C-2				

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P04				
Identifier: P3_204				
Purpose: Verify IUT Restarts a Restart Indication with an assigned LCI not equal to zero, received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP ?TIMEOUT TD_RESP !RESTART START TD_RESP ?RESTART [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG32 OR DIAG41)) OR CAUSE_EQ_128] #CANCEL !RESTARTC +R1_POSTAMBLE ?RESTART !RESTARTC CANCEL ?RESTARTC CANCEL ?TIMEOUT TD_RESP ?OTHERWISE CANCEL +R3_UNEXPECTED </pre>		<pre> STRT_DCE STRT_NZ (LCI) STRT_1DTEA STRTC STRT_1DTEA STRTC STRTC_1 </pre>	<pre> (P) I F F F </pre>	<pre> 1 </pre>
Extended Comments:				
1) no information, not allowed, non-zero lci				
This test case is not applicable to CCITT X.25 1980 and 1984 IUTs.				

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P05				
Identifier: P3_205				
Purpose: Verify the IUT Restarts a Restart Confirmation with an assigned LCI not equal to zero received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP ?TIMEOUT TD_RESP !RESTARTC START TD_RESP ?RESTART [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG32 OR DIAG41)) OR CAUSE_EQ_128] #CANCEL !RESTARTC +R1_POSTAMBLE ?RESTART !RESTARTC CANCEL ?RESTARTC CANCEL ?TIMEOUT TD_RESP ?OTHERWISE CANCEL +R3_UNEXPECTED </pre>		<pre> STRT_DCE STRTC_NZ (LCI) STRT_1DTEA STRTC STRT_1DTEA STRTC STRTC_1 </pre>	<pre> (P) I F F F </pre>	<pre> 1 </pre>
Extended Comments :				
<p>1) no information, not allowed, non-zero lci</p> <p>This test case is not applicable to CCITT X.25 1980 and 1984 IUTs.</p>				

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P06				
Identifier: P3_206				
Purpose: Verify the IUT discards a too short Restart Indication received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !RESTART [ISO] ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL TD +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED [CCITT_80 OR CCITT_84] ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL TD +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL ?RESTART CANCEL +R1_POSTAMBLE +R3_UNEXPECTED		STRT_DCE STRT_NR STRTC_1 STRT_1DTEA STRTC_1 STRT_1DTEA STRT_1DTEA STRT_1DTEA	 (P) (P) F F (P) (P) F F (P) (P)	 1 1
Extended Comments: 1) CCITT X.25 1980 and 1984 IUTs may send a Restart				

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P07				
Identifier: P3_207				
Purpose: Verify the IUT discards a too long Restart Indication received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP		STRT_DCE		
!RESTART [ISO] ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD		STRT_LO		
+R1_POSTAMBLE ?RESTART CANCEL TD		STRTC_1	(P)	
+R1_POSTAMBLE ?RESTART CANCEL TD		STRT_1DTEA	(P)	
+R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL			F F	
+R3_UNEXPECTED [CCITT_80 OR CCITT_84] ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD		STRTC_1	(P)	
+R1_POSTAMBLE ?RESTART CANCEL TD		STRT_1DTEA	(P)	1
+R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL			F F	
?RESTART CANCEL +R1_POSTAMBLE		STRT_1DTEA	(P)	1
+R1_POSTAMBLE +R3_UNEXPECTED				

Extended Comments: 1) CCITT X.25 1980 and 1984 IUTs may send a Restart

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P08				
Identifier: P3_208				
Purpose: Verify the IUT discards a too long Restart Confirmation received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP		STRT_DCE		
!RESTARTC [ISO] ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD		STRTC_LO STRTC_1	 (P)	
+R1_POSTAMBLE ?RESTART CANCEL TD		 STRT_1DTEA	 (P)	
+R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL			 F F	
+R3_UNEXPECTED [CCITT_80 OR CCITT_84] ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD		 STRTC_1	 (P)	
+R1_POSTAMBLE ?RESTART CANCEL TD		 STRT_1DTEA	 (P)	1
+R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL			 F F	
?RESTART CANCEL +R1_POSTAMBLE		 STRT_1DTEA	 (P)	1
+R3_UNEXPECTED				

Extended Comments: 1) CCITT X.25 1980 and 1984 IUTs may send a Restart

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P10				
Identifier: P3_210				
Purpose: Verify the IUT discards a Diagnostic packet with an assigned LCI not equal to zero received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !DIAG ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE DGN_0 (LCI) STRTC_1 STRT_1DTEA	(P) (P) F F	
Extended Comments:				
This test case is not applicable to CCITT X.25 1980 and 1984 IUTs.				

STANDARDSISO.COM · Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P11				
Identifier: P3_211				
Purpose: Verify the IUT discards a too short Diagnostic packet received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !DIAG ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE DGN_SHT STRTC_1 STRT_1DTEA	(P) (P)	F F
Extended Comments:				
This test case is not applicable to CCITT X.25 1980 and 1984 IUTs.				

STANDARDSISO.COM · Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P12 Identifier: P3_212 Purpose: Verify the IUT discards a too long Diagnostic packet received in state R3 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !DIAG ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE DGN_L(0,0) STRTC_1 STRT_1DTEA	(P) (P) F F	
Extended Comments: This test case is not applicable to CCITT X.25 1980 and 1984 IUTs.				

STANDARDSISO.COM · Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P13				
Identifier: P3_213				
Purpose: Verify the IUT discards a too short packet received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !ERROR ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE ERR_A STRTC_1 STRT_LDTEA	(P) (P) F F	
Extended Comments :				

STANDARDSISO.COM :: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P14				
Identifier: P3_214				
Purpose: Verify the IUT discards Restart Indications with an invalid GFI received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !RESTART ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE +SUBTREE_BEGIN ?RESTART CANCEL TD ?TIMEOUT TD ?OTHERWISE CANCEL TD +R3_UNEXPECTED +R3_UNEXPECTED SUBTREE_BEGIN [SEQ_MODULO = 8] (GF := 2) +SUBTREE +SUBTREE_1 [SEQ_MODULO = 128] (GF := 1) +SUBTREE +SUBTREE_1 SUBTREE_1 (GF := 3) REPEAT SUBTREE UNTIL [COUNT = 14] +R1_POSTAMBLE </pre>		<pre> STRT_DCE STRT_NIL STRTC_1 STRT_1DTEA </pre>	<pre> I F F (P) </pre>	<pre> 1 </pre>

[3]

Continued on next page

..... Continued from previous page. [0]

Behaviour Description	Label	Constraints Reference	V	Comments
<p>SUBTREE</p> <p>!RESTART START TD_RESP, START TO_R3, START #TD</p> <p>?TIMEOUT TD_RESP</p> <p>!RESTART_1 (GFI := GF) (GF := GF + 1)</p> <p>?TIMEOUT TO_R3</p> <p>?RESTARTC CANCEL TD</p> <p>+R1_POSTAMBLE (COUNT := COUNT + 1)</p> <p>?RESTART CANCEL TD</p> <p>?TIMEOUT TD</p> <p>?OTHERWISE CANCEL TD</p> <p>+R3_UNEXPECTED</p> <p>+R3_UNEXPECTED</p>		<p>STRT_DCE</p> <p>STRT_UDF</p> <p>STRTC_1</p> <p>STRT_1DTEA</p>	<p></p> <p></p> <p></p> <p>I</p> <p>F</p> <p>F</p>	
<p>Extended Comments :</p>				
<p>1) RESTARTs with GFI values 3 to 15 are transmitted.</p>				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P15A				
Identifier: P3_215A				
Purpose: Verify the IUT discards an Incoming Call on an unassigned logical channel received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !CALL ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE ?RESTART CANCEL +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE CALL_0 (LCI) STRTC_1	 (P) (P) F F	1 2 2
Extended Comments: 1) an unassigned logical channel is used 2) get a valid logical channel for use by R1_POSTAMBLE				

STANDARDSISO.COM Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P15B				
Identifier: P3_215B				
Purpose: Verify the IUT discards a Call Connected packet on an unassigned logical channel received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !ACCEPT ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE ?RESTART CANCEL +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE ANSR_0 (LCI) STRTC_1 STRT_1DTEA	(P) F F	1 2 2
Extended Comments :				
1) an unassigned logical channel is used				
2) get a valid logical channel for use by R1_POSTAMBLE				

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P15C				
Identifier: P3_215C				
Purpose: Verify the IUT discards a Clear Indication on an unassigned logical channel received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP		STRT_DCE		1
!CLEAR ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD		CLR_0 (LCI) STRTC_1	(P)	
+ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE				2
?RESTART CANCEL		STRT_1DTEA	(P)	
+ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE				2
?TIMEOUT TD ?OTHERWISE CANCEL			F F	
+R3_UNEXPECTED +R3_UNEXPECTED				
Extended Comments: 1) an unassigned logical channel is used 2) get a valid logical channel for use by R1_POSTAMBLE				

STANDARDSISO.COM Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P15D Identifier: P3_215D Purpose: Verify the IUT discards a Clear Confirmation on an unassigned logical channel received in state R3 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !CLEARC ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE ?RESTART CANCEL +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE CLRC_0 (LCI) STRTC_1 STRT_1DTEA	(P) (P) F F	2 2
Extended Comments: 1) an unassigned logical channel is used 2) get a valid logical channel for use by R1_POSTAMBLE				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P15E				
Identifier: P3_215E				
Purpose: Verify the IUT discards a Data packet on an unassigned logical channel received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP		STRT_DCE		1
!DATA ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD		D_ONE (LCI) STRTC 1	(P)	2
+ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE				
?RESTART CANCEL		STRT_1DTEA	(P)	2
+ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE				
?TIMEOUT TD ?OTHERWISE CANCEL			F F	
+R3_UNEXPECTED +R3_UNEXPECTED				
Extended Comments :				
1) an unassigned logical channel is used				
2) get a valid logical channel for use by R1_POSTAMBLE				

STANDARDSISO.COM Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P15F				
Identifier: P3_215F				
Purpose: Verify the IUT discards an Interrupt on an unassigned logical channel received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !INT ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE ?RESTART CANCEL +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE INT_0 (LCI) STRTC_1 STRT_1DTEA	 (P) (P) F F	1 2 2
Extended Comments :				
1) an unassigned logical channel is used				
2) get a valid logical channel for use by R1_POSTAMBLE				

STANDARDSISO.COM. Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour					
Reference: PACKET/R3/IMPROPER/P15G					
Identifier: P3_215G					
Purpose: Verify the IUT discard an Interrupt Confirmation on an unassigned logical channel received in state R3					
Default:					
Behaviour Description	Label	Constraints Reference	V	Comments	
+R1_PREAMBLE (UVC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !INTC ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE ?RESTART CANCEL +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE		1	
		INTC_0 (LCI)			
		STRTC_1	(P)	2	
		STRT_1DTEA	(P)	2	
				F	
				F	
Extended Comments: 1) an unassigned logical channel is used 2) get a valid logical channel for use by R1_POSTAMBLE					

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P15H				
Identifier: P3_215H				
Purpose: Verify the IUT discards a Receive Ready (RR) on an unassigned logical channel received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !RR ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE ?RESTART CANCEL +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE RR_0 (LCI) STRTC_1 STRT_1DTEA	(P) F F	1 2 2
Extended Comments: 1) an unassigned logical channel is used 2) get a valid logical channel for use by R1_POSTAMBLE				

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P15I Identifier: P3_215I Purpose: Verify the IUT discards a Receive Not Ready (RNR) on an unassigned logical channel received in state R3 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !RNR ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE ?RESTART CANCEL +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE RNR_0 (LCI) STRTC_1 STRT_1DTEA	 (P) (P) F F	1 2 2
Extended Comments : 1) an unassigned logical channel is used 2) get a valid logical channel for use by R1_POSTAMBLE				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P15J				
Identifier: P3_215J				
Purpose: Verify the IUT discards a Reset Indication on an unassigned logical channel received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP		STRT_DCE		1
!RESET ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD		RST_0 (LCI) STRTC_1	(P)	2
+ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE				2
?RESTART CANCEL		STRT_1DTEA	(P)	
+ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE				2
?TIMEOUT TD ?OTHERWISE CANCEL			F F	
+R3_UNEXPECTED +R3_UNEXPECTED				
Extended Comments:				
1) an unassigned logical channel is used				
2) get a valid logical channel for use by R1_POSTAMBLE				

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P15K				
Identifier: P3_215K				
Purpose: Verify the IUT discards a Reset Confirmation on an unassigned logical channel received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !RESETC ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE ?RESTART CANCEL +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE RSTC_0 (LCI) STRTC_1 STRT_1DTEA	 (P) (P) F F	1 2 2
Extended Comments : 1) an unassigned logical channel is used 2) get a valid logical channel for use by R1_POSTAMBLE				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P15M Identifier: P3_215M Purpose: Verify the IUT discards a Restart on an unassigned logical channel received in state R3 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !RESTART ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE ?RESTART CANCEL +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE STRT_NZ (LCI) STRTC_1 STRT_1DTEA	 (P) (P) F F	1 2 2
Extended Comments : 1) an unassigned logical channel is used 2) get a valid logical channel for use by R1_POSTAMBLE				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/IMPROPER/P15N				
Identifier: P3_215N				
Purpose: Verify the IUT discards a Restart Confirmation on an unassigned logical channel received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (UVC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !RESTARTC ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE ?RESTART CANCEL +ASSIGN_DCE (ANY_VC) +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE STRTC_NZ (LCI) STRTC_1 STRT_1DTEA	 (P) (P) F F	1 2 2
Extended Comments:				
1) an unassigned logical channel is used				
2) get a valid logical channel for use by R1_POSTAMBLE				

Test Case Dynamic Behaviour				
Reference: PACKET/R3/INOOPORTUNE/P01				
Identifier: P3_301				
Purpose: Verify the IUT discards a Restart Indication received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !RESTART ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE STRT_DCE STRTC_1 STRT_1DTEA	 (P) (P) F F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/ INOPPORTUNE/P02				
Identifier: P3_302				
Purpose: Verify the IUT Restarts a Restart Confirmation received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP ?TIMEOUT TD_RESP !RESTARTC START TD_RESP ?RESTART [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG16 OR DIAG19)) OR CAUSE_EQ_128] #CANCEL !RESTARTC +R1_POSTAMBLE ?RESTART !RESTARTC CANCEL ?RESTARTC CANCEL ?TIMEOUT TD_RESP ?OTHERWISE CANCEL +R3_UNEXPECTED </pre>		<pre> STRT_DCE STRTC STRT_1DTEA STRTC STRT_1DTEA STRTC STRTC_1 </pre>	<pre> (P) I F F F </pre>	invalid for R3
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/R3/INOPPORTUNE/P03A				
Identifier: P3_303A				
Purpose: Verify the IUT Restarts an Incoming Call received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (ANY_VC) !RESTART START TD_RESP, START TO_R3, #START TD ?TIMEOUT TD_RESP !CALL [ISO] START TD_RESP, CANCEL TO_R3, #CANCEL TD ?RESTART [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG16 OR DIAG19)) OR #CAUSE_EQ_128] CANCEL !RESTARTC +R1_POSTAMBLE ?RESTART ?RESTARTC CANCEL ?TIMEOUT TD_RESP ?OTHERWISE CANCEL [CCITT_80 OR CCITT_84] ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED </pre>		<pre> STRT_DCE CALL_0(LCI) STRT_1DTEA STRTC STRT_1DTEA STRTC_1 STRTC_1 STRT_1DTEA </pre>	<pre> (P) I F F F (P) (P) F F </pre>	<pre> 1 2 </pre>
Extended Comments: 1) ISO 8208 IUTs must send a Restart				
2) CCITT X.25 1980 and 1984 IUTs may discard the inopportune packet				

Test Case Dynamic Behaviour				
Reference: PACKET/R3/INOPPORTUNE/P03B				
Identifier: P3_303B				
Purpose: Verify the IUT Restarts a Call Connected packet received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (ANY_VC) !RESTART START TO_R3, START TD ?TIMEOUT TD !ACCEPT [ISO] START TD_RESP, CANCEL TO_R3, #CANCEL TD ?RESTART [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG16 OR DIAG19)) OR #CAUSE_EQ_128] CANCEL !RESTARTC +R1_POSTAMBLE ?RESTART ?RESTARTC CANCEL ?TIMEOUT TD_RESP ?OTHERWISE CANCEL [CCITT_80 OR CCITT_84] ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED </pre>		<pre> STRT_DCE ANSR_0(LCI) STRT_1DTEA STRTC STRT_1DTEA STRTC_1 STRTC_1 STRT_1DTEA </pre>	<pre> (P) I F F F (P) (P) F F </pre>	<pre> 1 2 </pre>
Extended Comments : 1) ISO 8208 IUTs must send a Restart				
2) CCITT X.25 1980 and 1984 IUTs may discard the inopportune packet				

Test Case Dynamic Behaviour				
Reference: PACKET/R3/INOPPORTUNE/P03C				
Identifier: P3_303C				
Purpose: Verify the IUT Restarts a Clear Indication received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (ANY_VC) !RESTART START TO_R3, START TD ?TIMEOUT TD !CLEAR [ISO] START TD_RESP, CANCEL TO_R3, #CANCEL TD ?RESTART [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG16 OR DIAG19)) OR #CAUSE_EQ_128] CANCEL !RESTARTC +R1_POSTAMBLE ?RESTART ?RESTARTC CANCEL ?TIMEOUT TD_RESP ?OTHERWISE CANCEL [CCITT_80 OR CCITT_84] ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED </pre>		<pre> STRT_DCE CLR_0 (LCI) STRT_1DTEA STRTC STRT_1DTEA STRTC_1 STRTC_1 STRT_1DTEA </pre>	<pre> (P) I F F F (P) (P) F F </pre>	<pre> 1 2 </pre>
Extended Comments : 1) ISO 8208 IUTs must send a Restart 2) CCITT X.25 1980 and 1984 IUTs may discard the inopportune packet				

Test Case Dynamic Behaviour				
Reference: PACKET/R3/INOPPORTUNE/P03D				
Identifier: P3_303D				
Purpose: Verify the IUT Restarts a Clear Confirmation received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TO_R3, START TD ?TIMEOUT TD !CLEARC [ISO] START TD_RESP, CANCEL TO_R3, #CANCEL TD ?RESTART [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG16 OR DIAG19)) OR #CAUSE_EQ_128] CANCEL !RESTARTC +R1_POSTAMBLE ?RESTART ?RESTARTC CANCEL ?TIMEOUT TD_RESP ?OTHERWISE CANCEL [CCITT_80 OR CCITT_84] ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE CLRC_0 (LCI) STRT_1DTEA STRTC STRT_1DTEA STRTC_1 STRTC_1 STRT_1DTEA	(P) I F F F (P) (P) F F	1 2
Extended Comments: 1) ISO 8208 IUTs must send a Restart 2) CCITT X.25 1980 and 1984 IUTs may discard the inopportune packet				

Test Case Dynamic Behaviour				
Reference: PACKET/R3/INOPPORTUNE/P03E				
Identifier: P3_303E				
Purpose: Verify the IUT Restarts a Data packet received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TO_R3, START TD ?TIMEOUT TD !DATA [ISO] START TD_RESP, CANCEL TO_R3, #CANCEL TD ?RESTART [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG16 OR DIAG19)) OR #CAUSE_EQ_128] CANCEL !RESTARTC +R1_POSTAMBLE ?RESTART ?RESTARTC CANCEL ?TIMEOUT TD_RESP ?OTHERWISE CANCEL [CCITT_80 OR CCITT_84] ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE D_ONE (LCI) STRT_1DTEA STRTC STRT_1DTEA STRTC_1 STRTC_1 STRT_1DTEA	(P) I F F F (P) (P) F F	1 2
Extended Comments: 1) ISO 8208 IUTs must send a Restart 2) CCITT X.25 1980 and 1984 IUTs may discard the inopportune packet				

Test Case Dynamic Behaviour				
Reference: PACKET/R3/INOPPORTUNE/P03F				
Identifier: P3_303F				
Purpose: Verify the IUT Restarts an Interrupt packet received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TO_R3, START TD ?TIMEOUT TD !INT [ISO] START TD_RESP, CANCEL TO_R3, #CANCEL TD ?RESTART [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG16 OR DIAG19)) OR #CAUSE_EQ_128] CANCEL !RESTARTC +R1_POSTAMBLE ?RESTART ?RESTARTC CANCEL ?TIMEOUT TD_RESP ?OTHERWISE CANCEL [CCITT_80 OR CCITT_84] ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE INT_0 (LCI) STRT_1DTEA STRTC STRT_1DTEA STRTC_1 STRTC_1 STRT_1DTEA	(P) I F F F (P) (P) F F	1 2
Extended Comments: 1) ISO 8208 IUTs must send a Restart 2) CCITT X.25 1980 and 1984 IUTs may discard the inopportune packet				

Test Case Dynamic Behaviour					
Reference: PACKET/R3/INOPPORTUNE/P03G					
Identifier: P3_303G					
Purpose: Verify the IUT Restarts an Interrupt Confirmation received in state R3					
Default:					
Behaviour Description	Label	Constraints Reference	V	Comments	
<pre> +R1_PREAMBLE (ANY_VC) !RESTART START TO_R3, START TD ?TIMEOUT TD !INTC [ISO] START TD_RESP, CANCEL TO_R3, #CANCEL TD ?RESTART [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG16 OR DIAG19)) OR #CAUSE_EQ_128] CANCEL !RESTARTC +R1_POSTAMBLE ?RESTART ?RESTARTC CANCEL ?TIMEOUT TD_RESP ?OTHERWISE CANCEL [CCITT_80 OR CCITT_84] ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED </pre>		STRT_DCE		1	
			INTC_0 (LCI)		
			STRT_1DTEA		2
			STRTC	(P)	
			STRT_1DTEA	I	
			STRTC_1	F F F	
			STRTC_1	(P)	3
			STRT_1DTEA	(P)	
				F F	
Extended Comments: 1) a valid Logical Channel is used. 2) ISO 8208 IUTs must send a Restart 3) CCITT X.25 1980 and 1984 IUTs may discard the inopportune packet, in this case a Restart Confirmation is still expected in response to the Restart Request.					

Test Case Dynamic Behaviour				
Reference: PACKET/R3/INOPPORTUNE/P03H				
Identifier: P3_303H				
Purpose: Verify the IUT Restarts a Receive Ready (RR) packet received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (ANY_VC) !RESTART START TO_R3, START TD ?TIMEOUT TD !RR [ISO] START TD_RESP, CANCEL TO_R3, #CANCEL TD ?RESTART [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG16 OR DIAG19)) OR #CAUSE_EQ_128] CANCEL !RESTARTC +R1_POSTAMBLE ?RESTART ?RESTARTC CANCEL ?TIMEOUT TD_RESP ?OTHERWISE CANCEL [CCITT_80 OR CCITT_84] ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED </pre>		<pre> STRT_DCE RR_0 (LCI) STRT_1DTEA STRTC STRT_1DTEA STRTC_1 STRTC_1 STRT_1DTEA </pre>	<pre> (P) I F F F (P) (P) F F </pre>	<pre> 1 2 </pre>
Extended Comments: 1) ISO 8208 IUTs must send a Restart 2) CCITT X.25 1980 and 1984 IUTs may discard the inopportune packet				

Test Case Dynamic Behaviour				
Reference: PACKET/R3/INOPPORTUNE/P03I				
Identifier: P3_303I				
Purpose: Verify the IUT Restarts a Receive Not Ready (RNR) packet received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (ANY_VC) !RESTART START TO_R3, START TD ?TIMEOUT TD !RNR [ISO] START TD_RESP, CANCEL TO_R3, #CANCEL TD ?RESTART [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG16 OR DIAG19)) OR #CAUSE_EQ_128] CANCEL !RESTARTC +R1_POSTAMBLE ?RESTART ?RESTARTC CANCEL ?TIMEOUT TD_RESP ?OTHERWISE CANCEL [CCITT_80 OR CCITT_84] ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED </pre>		<pre> STRT_DCE RNR_0 (LCI) STRT_1DTEA STRTC STRT_1DTEA STRTC_1 STRTC_1 STRT_1DTEA </pre>	<pre> (P) I F F F (P) (P) F F </pre>	<pre> 1 2 </pre>
Extended Comments: 1) ISO 8208 IUTs must send a Restart				
2) CCITT X.25 1980 and 1984 IUTs may discard the inopportune packet				

Test Case Dynamic Behaviour				
Reference: PACKET/R3/INOOPORTUNE/P03J				
Identifier: P3_303J				
Purpose: Verify the IUT Restarts a Reset Indication received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TO_R3, START TD ?TIMEOUT TD !RESET [ISO] START TD_RESP, CANCEL TO_R3, #CANCEL TD ?RESTART [(CAUSE_EQ_0 AND # (DIAG0 OR DIAG16 OR DIAG19)) OR #CAUSE_EQ_128] CANCEL !RESTARTC +R1_POSTAMBLE ?RESTART ?RESTARTC CANCEL ?TIMEOUT TD_RESP ?OTHERWISE CANCEL [CCITT_80 OR CCITT_84] ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED		STRT_DCE RST_0 (LCI) STRT_1DTEA STRTC STRT_1DTEA STRTC_1 STRTC_1 STRT_1DTEA	(P) I F F F (P) (P) F F	1 2
Extended Comments: 1) ISO 8208 IUTs must send a Restart 2) CCITT X.25 1980 and 1984 IUTs may discard the inopportune packet				

Test Case Dynamic Behaviour				
Reference: PACKET/R3/INOPPORTUNE/P03K				
Identifier: P3_303K				
Purpose: Verify the IUT Restarts a Reset Confirmation received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (ANY_VC) !RESTART START TO_R3, START TD ?TIMEOUT TD !RESETC [ISO] START TD_RESP, CANCEL TO_R3, #CANCEL TD ?RESTART [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG16 OR DIAG19)) OR #CAUSE_EQ_128] CANCEL !RESTARTC +R1_POSTAMBLE ?RESTART ?RESTARTC CANCEL ?TIMEOUT TD_RESP ?OTHERWISE CANCEL [CCITT_80 OR CCITT_84] ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +R3_UNEXPECTED +R3_UNEXPECTED </pre>		<pre> STRT_DCE RSTC_0 (LCI) STRT_1DTEA STRTC STRT_1DTEA STRTC_1 STRTC_1 STRT_1DTEA </pre>	<pre> (P) I F F F (P) (P) F F </pre>	<pre> 1 2 </pre>
Extended Comments: 1) ISO 8208 IUTs must send a Restart 2) CCITT X.25 1980 and 1984 IUTs may discard the inopportune packet				

Test Case Dynamic Behaviour				
Reference: PACKET/R3/INOPPORTUNE/P03L				
Identifier: P3_303L				
Purpose: Verify the IUT Restarts a Reject packet received in state R3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) !RESTART START TO_R3, START TD ?TIMEOUT TD		STRT_DCE		
!REJ [ISO] START TD_RESP, CANCEL TO_R3, #CANCEL TD		REJ_0 (LCI)		
?RESTART [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG16 OR DIAG19)) OR #CAUSE_EQ_128] CANCEL		STRT_1DTEA		1
!RESTARTC		STRTC	(P)	
+R1_POSTAMBLE				
?RESTART		STRT_1DTEA	I	
?RESTARTC CANCEL		STRTC_1	F	
?TIMEOUT TD_RESP			F	
?OTHERWISE CANCEL			F	
[CCITT_80 OR CCITT_84] ?TIMEOUT TO_R3 ?RESTARTC CANCEL TD		STRTC_1	(P)	2
+R1_POSTAMBLE				
?RESTART CANCEL		STRT_1DTEA	(P)	
+R1_POSTAMBLE				
?TIMEOUT TD			F	
?OTHERWISE CANCEL			F	
+R3_UNEXPECTED				
+R3_UNEXPECTED				

Extended Comments: 1) ISO 8208 IUTs must send a Restart
2) CCITT x.25 1980 and 1984 IUTs may discard the inopportune packet

Packet Layer Group 4: State P1 Ready

PLG 4 contains the test cases for the Setup and Clearing STATE p1, and does not include specific tests for optional facilities. This packet layer test group is not applicable when testing Permanent Virtual Circuits.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P1/PROPER/P01				
Identifier: P4_101				
Purpose: Verify the IUT accepts a valid Incoming Call received in state P1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD ?ACCEPT CANCEL TD +P4_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL TD		CALL_0 (LCI) ANSR_1 (LCI)	(P) F F	

Test Case Dynamic Behaviour				
Reference: PACKET/P1/PROPER/P03				
Identifier: P4_103				
Purpose: Verify that the IUT confirms a CLEAR with cause '01'H received in state P1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CLEAR START TD ?CLEARC CANCEL +R1_POSTAMBLE ?CLEAR CANCEL +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] CANCEL !RESTARTC +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL		CLR_C01 (LCI) CLRC_1 (LCI) CLR_1 (LCI) STRT_1DTEA STRTC	(P) (P) (P) F F	1
Extended Comments: 1) clear collision				

Test Case Dynamic Behaviour				
Reference: PACKET/P1/PROPER/P04				
Identifier: P4_104				
Purpose: Verify that the IUT confirms a CLEAR with cause '05'H received in state P1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC)				
!CLEAR START TD ?CLEARC CANCEL		CLR_C05 (LCI) CLRC_1 (LCI)	(P)	
+R1_POSTAMBLE				
?CLEAR CANCEL		CLR_1 (LCI)	(P)	1
+R1_POSTAMBLE				
?RESTART [RST_ON_ERR_C] CANCEL		STRT_1DTEA	(P)	
!RESTARTC +R1_POSTAMBLE		STRTC		
+RSTRT_UNEXPECTED ?TIMEOUT TD			F	
?OTHERWISE CANCEL			F	
Extended Comments: 1) clear collision				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P1/PROPER/P05				
Identifier: P4_105				
Purpose: Verify that the IUT confirms a Clear with cause '11'H received in state P1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC)				
!CLEAR START TD		CLR_C11 (LCI)		
?CLEARC CANCEL		CLRC_1 (LCI)	(P)	
+R1_POSTAMBLE				
?CLEAR CANCEL		CLR_1 (LCI)	(P)	1
+R1_POSTAMBLE				
?RESTART [RST_ON_ERR_C] CANCEL		STRTDTEA	(P)	
!RESTARTC		STRTC		
+R1_POSTAMBLE				
+RSTRT_UNEXPECTED				
?TIMEOUT TD			F	
?OTHERWISE CANCEL			F	
Extended Comments: 1) clear collision				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P1/PROPER/P06				
Identifier: P4_106				
Purpose: Verify that the IUT confirms a Clear with cause '13'H received in state P1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC)				
!CLEAR START TD		CLR_C13 (LCI)		
?CLEARC CANCEL		CLRC_1 (LCI)	(P)	
+R1_POSTAMBLE				
?CLEAR CANCEL		CLR_1 (LCI)	(P)	1
+R1_POSTAMBLE				
?RESTART [RST_ON_ERR_C] CANCEL		STRT_1DTEA	(P)	
!RESTARTC		STRTC		
+R1_POSTAMBLE				
+RSTRT_UNEXPECTED				
?TIMEOUT TD			F	
?OTHERWISE CANCEL			F	
Extended Comments: 1) clear collision				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P1/PROPER/P07				
Identifier: P4_107				
Purpose: Verify the IUT confirms a Clear with cause '21'H received in state P1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC)				
!CLEAR START TD		CLR_C21 (LCI)		
?CLEARC CANCEL		CLRC_1 (LCI)	(P)	
+R1_POSTAMBLE				
?CLEAR CANCEL		CLR_1 (LCI)	(P)	1
+R1_POSTAMBLE				
?RESTART [RST_ON_ERR_C] CANCEL		STRT_1DTEA	(P)	
!RESTARTC		STRTC		
+R1_POSTAMBLE				
+RSTRT_UNEXPECTED				
?TIMEOUT TD			F	
?OTHERWISE CANCEL			F	
Extended Comments: 1) clear collision				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P1/IMPROPER/P01				
Identifier: P4_201				
Purpose: Verify the IUT clears a packet of length two octets received in state P1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !ERROR START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG33 OR DIAG38)) OR #CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG33 OR DIAG38)) #OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		ERR_SHT (LCI) CLR_1 (LCI) STRT_1DTEA	(B) (P) F F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P1/IMPROPER/P02				
Identifier: P4_202				
Purpose: Verify that the IUT clears a packet of unidentified type in state P1.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !ERROR START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG33)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG33)) OR #CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		ERR_B (LCI) CLR_1 (LCI) STRT_1DTEA	(P) (P) F F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P1/IMPROPER/P03 Identifier: P4_203 Purpose: Verify that the IUT clears a Restart packet with an assigned LCI not equal to zero received in state P1 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (TVC_OR_IVC) !RESTART START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG41)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG41)) OR #CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>		STRT_NZ (LCI) CLR_1 (LCI)	(P)	
		STRT_1DTEA	(P)	
			F	
			F	
Extended Comments:				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P1/IMPROPER/P04				
Identifier: P4_204				
Purpose: Verify that the IUT clears a Restart Confirm packet received on an assigned LCI not equal to zero while in state P1.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !RESTARTC START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG41)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG41)) OR #CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		STRTC_NZ (LCI) CLR_1 (LCI) STRT_1DTEA	(P) (P) F F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P1/IMPROPER/P05				
Identifier: P4_205				
Purpose: Verify that the IUT clears a too short Incoming Call packet received in state P1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG38)) OR CAUSE_EQ_128] CANCEL #TD +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG38)) OR #CAUSE_EQ_128] CANCEL TD +GEN2_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CALL_SHT(LCI) CLR_1(LCI) STRT_1DTEA	(P) (P) F F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P1/IMPROPER/P06				
Identifier: P4_206				
Purpose: Verify the IUT clears a too long Incoming Call packet (user data field of 17 or 129 octets) while in state P1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (TVC_OR_IVC) [FAST_SELECT = TRUE] !CALL START TD # +SUBTREE [FAST_SELECT = FALSE] !CALL START TD +SUBTREE SUBTREE ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 #OR DIAG39)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL TD +GEN2_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>		<pre> CALL_U129 (LCI) CALL_U17 (LCI) CLR_1 (LCI) STRT_1DTEA </pre>	<pre> 1 1 (P) (P) F F </pre>	<pre> 1 1 </pre>
Extended Comments: 1) if Fast Select is supported and in use then send 129 octets of user data, otherwise send 17 octets.				

STANDARD.PDF.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P1/IMPROPER/P07				
Identifier: P4_207				
Purpose: Verify the IUT clears a too long Call Connected packet (user data field of 1 or 129 octets) while in state P1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (TVC_OR_IVC) [FAST_SELECT = TRUE] !ACCEPT START TD # +SUBTREE [FAST_SELECT = FALSE] !ACCEPT START TD +SUBTREE SUBTREE ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR DIAG16 #OR DIAG20 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG16 OR DIAG20 OR DIAG32 OR #DIAG39)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>		<pre> ANSR_0U129 (LCI) ANSR_0U1 (LCI) CLR_1 (LCI) STRT_1DTEA </pre>	<pre> 1 1 (P) (P) F F </pre>	<pre> 1 1 </pre>
Extended Comments:				
<p>1) if Fast Select is supported and in use then send 129 octets of user data, otherwise send 1 octet of user data.</p> <p>NOTE Two kind of errors here, invalid packet for P1 or a format error too long</p>				

Test Case Dynamic Behaviour				
Reference: PACKET/P1/IMPROPER/P08				
Identifier: P4_208				
Purpose: Verify the IUT clears a too short Clear Indication packet (no cause code or diagnostic code fields) while in state P1.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (TVC_OR_IVC) !CLEAR START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG20 OR DIAG32 OR DIAG38)) OR #CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG16 OR DIAG20 OR DIAG32 #OR DIAG38)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>		<pre> CLR_SHT (LCI) CLR_1 (LCI) STRT_LDTEA </pre>	<pre> (P) (P) F F </pre>	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P1/IMPROPER/P09				
Identifier: P4_209				
Purpose: Verify that the IUT clears a too long Clear Indication packet while in state P1.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE(TVC_OR_IVC) !CLEAR START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG39 OR DIAG42)) OR #CAUSE_EQ_128] CANCEL TD +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG39 OR DIAG42)) #OR CAUSE_EQ_128] CANCEL TD +GEN2_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>		<pre> CLR_LNG(LCI) CLR_1(LCI) STRT_1DTEA </pre>	<pre> (P) (P) F F </pre>	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P1/IMPROPER/P10				
Identifier: P4_210				
Purpose: Verify that the IUT clears a too long Clear Confirmation packet (110 octets appended to the end of the packet) while in P1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (TVC_OR_IVC) !CLEARC START TD # ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG20 OR DIAG32 OR DIAG39 OR #DIAG42)) OR CAUSE_EQ_128] CANCEL TD +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG16 OR DIAG20 OR DIAG32 #OR DIAG39 OR DIAG42)) OR CAUSE_EQ_128] #CANCEL TD +GEN2_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>		<pre> CLRC_U110 (LCI) CLR_1 (LCI) STRT_1DTEA </pre>	<pre> (P) (P) FF </pre>	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P1/INOPPORTUNE/P01				
Identifier: P4_301				
Purpose: Verify the IUT clears a Call Connected packet received in state P1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !ACCEPT START TD +P1_INOPP +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		ANSR_0 (LCI)	(P) F F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P1/INOPPORTUNE/P02				
Identifier: P4_302				
Purpose: Verify the IUT clears a Clear Confirm packet received in state P1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CLEARC START TD +P1_INOPP +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CLRC_0 (LCI)	(P) F F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P1/INOPPORTUNE/P05				
Identifier: P4_305				
Purpose: Verify the IUT clears a Interrupt Confirmation packet received in state P1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC)				
!INTC START TD		INTC_0 (LCI)	(P)	
+P1_INOPP				
+R1_POSTAMBLE				
+RSTRT_UNEXPECTED				
?TIMEOUT TD			F	
?OTHERWISE CANCEL TD			F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P1/INOPPORTUNE/P06				
Identifier: P4_306				
Purpose: Verify the IUT clears an RR packet received in state P1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC)				
!RR START TD		RR_0 (LCI)	(P)	
+P1_INOPP				
+R1_POSTAMBLE				
+RSTRT_UNEXPECTED				
?TIMEOUT TD			F	
?OTHERWISE CANCEL TD			F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P1/INOPPORTUNE/P07				
Identifier: P4_307				
Purpose: Verify the IUT clears an RNR packet received in state P1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC)				
!RNR START TD		RNR_0 (LCI)	(P)	
+P1_INOPP				
+R1_POSTAMBLE				
+RSTRT_UNEXPECTED			F	
?TIMEOUT TD			F	
?OTHERWISE CANCEL TD				
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P1/INOPPORTUNE/P08				
Identifier: P4_308				
Purpose: Verify the IUT clears a Reset packet received in state P1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC)				
!RESET START TD		RST_0 (LCI)	(P)	
+P1_INOPP				
+R1_POSTAMBLE				
+RSTRT_UNEXPECTED			F	
?TIMEOUT TD			F	
?OTHERWISE CANCEL TD				
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P1/INOPPORTUNE/P09				
Identifier: P4_309				
Purpose: Verify the IUT clears a Reset Confirmation packet received in state P1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC)				
!RESETC START TD		RSTC_0 (LCI)	(P)	
+P1_INOPP				
+R1_POSTAMBLE				
+RSTRT_UNEXPECTED			F	
?TIMEOUT TD			F	
?OTHERWISE CANCEL TD			F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P1/INOPPORTUNE/P10				
Identifier: P4_310				
Purpose: Verify the IUT clears an Interrupt packet received in state P1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC)				
!INT START TD		INT_0 (LCI)	(P)	
+P1_INOPP				
+R1_POSTAMBLE				
+RSTRT_UNEXPECTED			F	
?TIMEOUT TD			F	
?OTHERWISE CANCEL TD			F	
Extended Comments:				

Packet Layer Group 5: State P2 DTE Call Request

PLG 5 contains the test cases for the Setup and Clearing STATE p2, and does not include specific tests for optional facilities. This packet layer test group is not applicable when testing Permanent Virtual Circuits or those IUTs supporting Incoming Calls only.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P2/PROPER/P01				
Identifier: P5_101				
Purpose: Verify the IUT correctly handles an Incoming Call received in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P2_PREAMBLE !CALL START TD ?TIMEOUT TD +P2_POSTAMBLE ?OTHERWISE CANCEL TD		CALL_0 (LCI)	(P) F	no response
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P2/PROPER/P03				
Identifier: P5_103				
Purpose: Verify the IUT accepts a Call Connected packet while in P2.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P2_PREAMBLE !ACCEPT +P4_POSTAMBLE		ANSR_0 (LCI)	(P)	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P2/PROPER/P04				
Identifier: P5_104				
Purpose: Verify the IUT confirms a Clear with cause code of '01'H received in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P2_PREAMBLE				
!CLEAR START TD ?CLEARC CANCEL TD		CLR_C01 (LCI) CLRC_1 (LCI)	(P)	1
+R1_POSTAMBLE				
?CLEAR CANCEL TD		CLR_1 (LCI)	(P)	
+GEN1_POSTAMBLE				
?RESTART [RST_ON_ERR_C] CANCEL TD		STRT_1DTEA	(P)	
+GEN2_POSTAMBLE				
+RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD			F F	2
Extended Comments:				
1) clear the call 2) no response				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P2/PROPER/P05				
Identifier: P5_105				
Purpose: Verify the IUT confirms a Clear with cause code of '05' H received in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P2_PREAMBLE				
!CLEAR START TD ?CLEARC CANCEL TD		CLR_C05 (LCI) CLRC_1 (LCI)	(P)	1
+R1_POSTAMBLE				
?CLEAR CANCEL TD		CLR_1 (LCI)	(P)	
+GEN1_POSTAMBLE				
?RESTART [RST_ON_ERR_C] CANCEL TD		STRT_1DTEA	(P)	
+GEN2_POSTAMBLE				
+RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD			F F	2
Extended Comments:				
1) clear the call 2) no response				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P2/PROPER/P06				
Identifier: P5_106				
Purpose: Verify the IUT confirms a Clear with cause code of '11'H received in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P2_PREAMBLE				
!CLEAR START TD ?CLEARC CANCEL TD		CLR_C11 (LCI) CLRC_1 (LCI)	(F)	
+R1_POSTAMBLE				
?CLEAR CANCEL TD		CLR_1 (LCI)	(P)	
+GEN1_POSTAMBLE				
?RESTART [RST_ON_ERR_C] CANCEL TD		STRT_1DTEA	(P)	
+GEN2_POSTAMBLE				
+RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD			F F	no response
Extended Comments:				

STANDARDSISO.COM :: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P2/PROPER/P07				
Identifier: P5_107				
Purpose: Verify the IUT confirms a Clear with cause code of '13'H received in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P2_PREAMBLE				
!CLEAR START TD ?CLEARC CANCEL TD		CLR_C13 (LCI) CLRC_1 (LCI)	(P)	
+R1_POSTAMBLE				
?CLEAR CANCEL TD		CLR_1 (LCI)	(P)	
+GEN1_POSTAMBLE				
?RESTART [RST_ON_ERR_C] CANCEL TD		STRT_1DTEA	(P)	
+GEN2_POSTAMBLE				
+RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD			F F	no response
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P2/PROPER/P08				
Identifier: P5_108				
Purpose: Verify the IUT confirms a Clear with cause code of '21'H received in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P2_PREAMBLE				
!CLEAR START TD		CLR_C21 (LCI)		
?CLEARC CANCEL TD		CLRC_1 (LCI)	(P)	
+R1_POSTAMBLE				
?CLEAR CANCEL TD		CLR_1 (LCI)	(P)	
+GEN1_POSTAMBLE				
?RESTART [RST_ON_ERR_C] CANCEL TD		STRT_1DTEA	(P)	
+GEN2_POSTAMBLE				
+RSTRT_UNEXPECTED			F	no response
?TIMEOUT TD			F	
?OTHERWISE CANCEL TD				
Extended Comments:				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P2/IMPROPER/P01				
Identifier: P5_201				
Purpose: Verify the IUT clears a packet of length two octets received in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P2_PREAMBLE !ERROR START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG33 OR DIAG38)) OR #CAUSE_EQ_128] CANCEL TD !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG38)) OR #CAUSE_EQ_128] CANCEL TD !RESTARTC +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		ERR_SHT (LCI) CLR_1 (LCI) CLRC_0 (LCI) STRT_1DTEA STRTC	(P) (P)	1 F F
Extended Comments:				
1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P2/IMPROPER/P02				
Identifier: P5_202				
Purpose: Verify the IUT clears a packet with an undefined PTI field received in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P2_PREAMBLE !ERROR START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG33)) OR CAUSE_EQ_128] CANCEL #TD !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG33)) OR #CAUSE_EQ_128] CANCEL TD !RESTARTC +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		ERR_B (LCI) CLR_1 (LCI) CLRC_0 (LCI) STRT_1DTEA STRTC	(P) (P) F F	1
Extended Comments:				
1) no response				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P2/IMPROPER/P03 Identifier: P5_203 Purpose: Verify the IUT Clears a Restart Indication with LCI<>0 received in state P2 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P2_PREAMBLE !RESTART START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG41)) OR CAUSE_EQ_128] CANCEL #TD !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG41)) OR #CAUSE_EQ_128] CANCEL TD !RESTARTC +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		STRT_NZ (LCI) CLR_1 (LCI) CLRC_0 (LCI) STRT_1DTEA STRTC	(P) (P) F F	1 2
Extended Comments:				
1) bad restart 2) no response				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P2/IMPROPER/P04				
Identifier: P5_204				
Purpose: Verify the IUT clears a Restart Confirmation with LCI<>0 received in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P2_PREAMBLE !RESTARTC START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG41)) OR CAUSE_EQ_128] CANCEL #TD !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG41)) OR #CAUSE_EQ_128] CANCEL TD !RESTARTC +R1_POSTAMBLE +RSTRT UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		STRTC_NZ (LCI) CLR_1 (LCI) CLRC_0 (LCI) STRT_1DTEA STRTC	(P) (P) F F	no response
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P2/IMPROPER/P06				
Identifier: P5_206				
Purpose: Verify the IUT clears or discards a too long Incoming Call packet (user data field of 17 or 129 octets) received in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P2_PREAMBLE				
[FAST_SELECT = TRUE] !CALL START TD		CALL_U129 (LCI)		1
# +SUBTREE				
[FAST_SELECT = FALSE] !CALL START TD +SUBTREE		CALL_U17 (LCI)		1
SUBTREE				
?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 #OR DIAG39)) OR CAUSE_EQ_128] CANCEL TD		CLR_1 (LCI)	(P)	
+GEN1_POSTAMBLE				
?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL TD		STRT_1DTEA	(P)	
+GEN2_POSTAMBLE				
?TIMEOUT TD !CLEAR START TD		CLR_0 (LCI)		2
?CLEARC CANCEL TD +R1_POSTAMBLE		CLRC_1 (LCI)	(P)	
+RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD			F F	2
+RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD			F	

Continued on next page

..... Continued from previous page.

Extended Comments :

1) if Fast Select is supported and in use then send 129 octets of user data, otherwise send 17 octets.

2) no response

NOTE: This test case uses an improperly formatted Incoming Call packet to create a call collision.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P2/IMPROPER/P07				
Identifier: P5_207				
Purpose: Verify the IUT clears a too long Call Connected packet (user data field of 1 or 129 octets) received in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P2_PREAMBLE [FAST_SELECT = TRUE] !ACCEPT START TD # +SUBTREE [FAST_SELECT = FALSE] !ACCEPT START TD +SUBTREE SUBTREE ?CLEAR { (CAUSE_EQ_0 AND (DIAG0 OR DIAG32 #OR DIAG39)) OR CAUSE_EQ_128] CANCEL TD !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] { (CAUSE_EQ_0 AND # (DIAG0 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL TD !RESTARTC +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		ANSR_0U129 (LCI) ANSR_0U1 (LCI) CLR_1 (LCI) CLRC_0 (LCI) STRT_1DTEA STRTC	 (P) (P) F F	1 1 2 2
Extended Comments:				
1) if Fast Select is supported and in use then send 129 octets of user data, otherwise send 1 octet of user data.				
2) IUTs using Fast Select but which require Fast Select with Restriction on Response, maybe unable to pass this test.				

Test Case Dynamic Behaviour				
Reference: PACKET/P2/IMPROPER/P08				
Identifier: P5_208				
Purpose: Verify the IUT clears a too short Clear Indication packet (no cause code or diagnostic code) received in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P2_PREAMBLE !CLEAR START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG38)) OR CAUSE_EQ_128] CANCEL #TD !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG38)) OR #CAUSE_EQ_128] CANCEL TD !RESTARTC +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CLR_SHT (LCI) CLR_1 (LCI) CLRC_0 (LCI) STRT_1DTEA STRTC	(P) (P) F F	
Extended Comments:				

STANDARDSISO.COM · Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P2/IMPROPER/P09				
Identifier: P5_209				
Purpose: Verify the IUT clears a too long Clear Indication packet received in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P2_PREAMBLE !CLEAR START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG39)) OR CAUSE_EQ_128] CANCEL #TD !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL TD !RESTARTC +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CLR_LNG (LCI) CLR_1 (LCI) CLRC_0 (LCI) STRT_1DTEA STRTC	(P) (P) F F	1
Extended Comments:				
1) no response				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P2/IMPROPER/P10				
Identifier: P5_210				
Purpose: Verify the IUT clears a too long Clear Confirmation packet received in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P2_PREAMBLE !CLEARC START TD # ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG21 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL TD !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG16 OR DIAG21 OR DIAG32 #OR DIAG39)) OR CAUSE_EQ_128] CANCEL TD !RESTARTC +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CLRC_U110 (LCI) CLR_1 (LCI) CLRC_0 (LCI) STRT_1DTEA STRTC	(P) (P) F F	1
Extended Comments:				
1) no response				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P2/ INOPPORTUNE/P01				
Identifier: P5_301				
Purpose: Verify the IUT clears a Clear Confirmation packet with valid Logical Channel Identifier while in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P2_PREAMBLE !CLEARC START TD +P2_INOPP +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CLRC_0 (LCI)	(P) F F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P2/ INOPPORTUNE/P02				
Identifier: P5_302				
Purpose: Verify the IUT clears a Data packet with valid Logical Channel Identifier while in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P2_PREAMBLE !DATA START TD +P2_INOPP +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		D_ONE (LCI)	(P) F F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P2/INOPPORTUNE/P03				
Identifier: P5_303				
Purpose: Verify the IUT clears an Interrupt packet with valid Logical Channel Identifier while in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE(NO_LC) +P2_PREAMBLE !INT START TD +P2_INOPP +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		INT_0 (LCI)	(P) F F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P2/INOPPORTUNE/P04				
Identifier: P5_304				
Purpose: Verify the IUT clears an Interrupt Confirmation packet with valid Logical Channel Identifier while in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE(NO_LC) +P2_PREAMBLE !INTC START TD +P2_INOPP +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		INTC_0 (LCI)	(P) F F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P2/ INOPPORTUNE/P05				
Identifier: P5_305				
Purpose: Verify the IUT clears an RR packet with valid Logical Channel Identifier while in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P2_PREAMBLE !RR START TD +P2_INOPP +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		RR_0 (LCI)	(P) F F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P2/ INOPPORTUNE/P06				
Identifier: P5_306				
Purpose: Verify the IUT clears a RNR packet with valid Logical Channel Identifier while in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P2_PREAMBLE !RNR START TD +P2_INOPP +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		RNR_0 (LCI)	(P) F F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P2/INOPPORTUNE/P07				
Identifier: P5_307				
Purpose: Verify the IUT clears a Reset packet with valid Logical Channel Identifier while in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P2_PREAMBLE !RESET START TD +P2_INOPP +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		RST_0 (LCI)	(P) F F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P2/INOPPORTUNE/P08				
Identifier: P5_308				
Purpose: Verify that the IUT clears a Reset Confirm packet with valid Logical Channel Identifier while in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P2_PREAMBLE !RESETC START TD +P2_INOPP +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		RSTC_0 (LCI)	(P) F F	
Extended Comments:				

Packet Layer Group 6 : State P3 DXE Incoming Call

PLG 6 contains the test cases for the Setup and Clearing STATE p3, and does not include specific tests for optional facilities. STATE p3 is a transient state and may not be observable. This packet layer test group is available only if the IUT implements the Packet Layer Protocol such that STATE p3 is observable. PLG 6 is not applicable when testing Permanent Virtual Circuits.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P3/PROPER/P01				
Identifier: P6_101				
Purpose: Verify the IUT confirms a Clear with cause '01'H received in state P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD_RESP		CALL_0 (LCI)		
!CLEAR START TD_RESP ?CLEARC CANCEL TD_RESP		CLR_C01 (LCI) CLRC_1 (LCI)	(P)	
+R1_POSTAMBLE ?CLEAR CANCEL TD_RESP		CLR_1 (LCI)	(P)	
+R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] CANCEL #TD_RESP		STRT_1DTEA	(P)	
!RESTARTC +R1_POSTAMBLE		STRTC		
?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED			F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P3/PROPER/P02				
Identifier: P6_102				
Purpose: Verify the IUT confirms a CLEAR with cause '05' H received in state P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD		CALL_0 (LCI)		
!CLEAR START TD_RESP ?CLEARC CANCEL TD_RESP		CLR_C05 (LCI) CLRC_1 (LCI)	(P)	
+R1_POSTAMBLE				
?CLEAR CANCEL TD_RESP		CLR_1 (LCI)	(P)	
+R1_POSTAMBLE				
?RESTART [RST_ON_ERR_C] CANCEL #TD_RESP		STRT_1DTEA	(P)	
!RESTARTC +R1_POSTAMBLE		STRTC		
?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED			F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P3/PROPER/P03				
Identifier: P6_103				
Purpose: Verify the IUT confirms a CLEAR with cause '11'H received in state P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD		CALL_0 (LCI)		
!CLEAR START TD_RESP ?CLEARC CANCEL TD_RESP		CLR_C11 (LCI) CLRC_1 (LCI)	(P)	
+R1_POSTAMBLE				
?CLEAR CANCEL TD_RESP		CLR_1 (LCI)	(P)	
+R1_POSTAMBLE				
?RESTART [RST_ON_ERR_C] CANCEL #TD_RESP		STRT_1DTEA	(P)	
!RESTARTC +R1_POSTAMBLE		STRTC		
?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED			F	
Extended Comments :				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P3/PROPER/P04				
Identifier: P6_104				
Purpose: Verify the IUT confirms a CLEAR with cause '13'H received in state P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD !CLEAR START TD_RESP ?CLEARC CANCEL TD_RESP +R1_POSTAMBLE ?CLEAR CANCEL TD_RESP +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] CANCEL #TD_RESP !RESTARTC +R1_POSTAMBLE ?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED		CALL_0 (LCI) CLR_C13 (LCI) CLR_C1 (LCI) CLR_1 (LCI) STRT_1DTEA STRTC	 (P) (P) (P) F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P3/PROPER/P05				
Identifier: P6_105				
Purpose: Verify the IUT confirms a CLEAR with cause '21'H received in state P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD		CALL_0 (LCI)		
!CLEAR START TD_RESP ?CLEARC CANCEL TD_RESP		CLR_C21 (LCI) CLR_1 (LCI)	(F)	
+R1_POSTAMBLE ?CLEAR CANCEL TD_RESP		CLR_1 (LCI)	(P)	
+R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] CANCEL #TD_RESP		STRT_1DTEA	(P)	
!RESTARTC +R1_POSTAMBLE		STRTC		
?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED			F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P3/IMPROPER/P01				
Identifier: P6_201				
Purpose: Verify the IUT clears a too short packet with length two octets received in state P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD_RESP !ERROR START TD_RESP ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG33 OR DIAG38)) OR #CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR DIAG33 #OR DIAG38)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED </pre>		<pre> CALL_0 (LCI) ERR_SHT (LCI) CLR_1 (LCI) STRT_1DTEA </pre>	(P)	1
Extended Comments:				
1) no information, not allowed, unidentifiable, too short				

STANDARDSISO.COM - Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P3/IMPROPER/P02				
Identifier: P6_202				
Purpose: Verify the IUT clears a packet of undefined type received in state P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD_RESP !ERROR START TD_RESP ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG33)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR #DIAG33)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED		CALL_0 (LCI) ERR_B (LCI) CLR_1 (LCI)	(P) (P) F	1
Extended Comments:				
1) no information, not allowed, unidentifiable				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P3/IMPROPER/P03				
Identifier: P6_203				
Purpose: Verify the IUT clears a Restart packet on an assigned LCI not equal to zero received in state P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD_RESP !RESTART START TD_RESP ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG41)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR #DIAG41)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED </pre>		<pre> CALL_0 (LCI) STRT_NZ (LCI) CLR_1 (LCI) STRT_1DTEA </pre>	<pre> (P) (P) F </pre>	<pre> 1 </pre>
Extended Comments:				
1) no information, not allowed, non-zero lci				

STANDARDSISO.COM :: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P3/IMPROPER/P04				
Identifier: P6_204				
Purpose: Verify the IUT clears a Restart Confirmation packet on an assigned LCI not equal to zero received in state P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD_RESP !RESTARTC START TD_RESP ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG41)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR #DIAG41)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED </pre>		<pre> CALL_0 (LCI) STRTC_NZ (LCI) CLR_1 (LCI) STRT_1DTEA </pre>	(P)	1
Extended Comments:				
1) no information, not allowed, non-zero lci				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P3/ IMPROPER/P05				
Identifier: P6_205				
Purpose: Verify the IUT clears a too short Incoming Call packet received in P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> #P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD_RESP !CALL START TD_RESP ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG38)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [#((CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR #DIAG38)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED </pre>		<pre> CALL_0 (LCI) CALL_SHT (LCI) CLR_1 (LCI) STRT_1DTEA </pre>	<pre> (P) (P) F </pre>	<pre> 1 </pre>
Extended Comments:				
1) no information, not allowed, too short				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P3/IMPROPER/P06				
Identifier: P6_206				
Purpose: Verify the IUT clears a too long Incoming Call packet (user data field of 17 or 129 octets) received in state P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD_RESP [FAST_SELECT = TRUE] !CALL START TD_RESP # +SUBTREE [FAST_SELECT = FALSE] !CALL START TD_RESP +SUBTREE +P3_UNEXPECTED SUBTREE ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 #OR DIAG39)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P3_UNEXPECTED </pre>		<p>CALL_0 (LCI)</p> <p>CALL_U129 (LCI)</p> <p>CALL_U17 (LCI)</p> <p>CLR_1 (LCI)</p> <p>STRT_1DTEA</p>	<p></p> <p></p> <p></p> <p>(P)</p> <p>(P)</p> <p>F</p>	<p>1</p> <p>1</p> <p>2</p>
Extended Comments:				
<p>1) if Fast Select is supported and in use then send 129 octets of user data, otherwise send 17 octets.</p> <p>2) no information, not allowed, too long</p>				

Test Case Dynamic Behaviour				
Reference: PACKET/P3/IMPROPER/P07 Identifier: P6_207 Purpose: Verify the IUT clears a too long Call Connected packet (user data field of 1 or 129 octets) received in state P3 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD_RESP [FAST_SELECT = TRUE] !ACCEPT START TD_RESP # +SUBTREE [FAST_SELECT = FALSE] !ACCEPT START TD_RESP +SUBTREE +P3_UNEXPECTED SUBTREE ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR DIAG16 #OR DIAG22 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG16 OR DIAG22 OR DIAG32 OR #DIAG39)) OR CAUSE_EQ_128] CANCEL !RESTARTC +R1_POSTAMBLE ?TIMEOUT TD_RESP +P3_UNEXPECTED </pre>		CALL_0 (LCI) ANSR_0U129 (LCI) ANSR_0U1 (LCI)		1 1
		CLR_1 (LCI)	(P)	2
		CLRC_0 (LCI)		
		STRT_1DTEA	(P)	
		STRTC		
Extended Comments:				
1) if Fast Select is supported and in use then send 129 octets of user data, otherwise send 1 octet of user data.				
2) no information, packet type invalid, invalid for P3, not allowed, too long				

Test Case Dynamic Behaviour				
Reference: PACKET/P3/IMPROPER/P08				
Identifier: P6_208				
Purpose: Verify the IUT clears a too short Clear Indication packet (no cause code or diagnostic code fields) received in state P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD_RESP !CLEAR START TD_RESP ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG38)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR #DIAG38)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED </pre>		<pre> CALL_0 (LCI) CLR_SHT (LCI) CLR_1 (LCI) STRT_1DTEA </pre>	<p>(P)</p> <p>(P)</p> <p>F</p>	<p>1</p>
Extended Comments:				
1) no information, not allowed, too short				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P3/IMPROPER/P09 Identifier: P6_209 Purpose: Verify the IUT clears a too long Clear Indication packet received in state P3 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD_RESP !CLEAR START TD_RESP ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG39)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR #DIAG39)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED </pre>		CALL_0 (LCI) CLR_LNG (LCI) CLR_1 (LCI) STRT_1DTEA	(P) (P) F	1
Extended Comments:				
1) no information, not allowed, too long				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P3/IMPROPER/P10				
Identifier: P6_210				
Purpose: Verify the IUT clears a too long Clear Confirmation packet (110 octets appended to the end of the packet) received in state P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD_RESP !CLEARC START TD_RESP # ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG22 OR DIAG32 OR DIAG38)) OR #CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG16 OR DIAG22 #OR DIAG32 OR DIAG38)) OR CAUSE_EQ_128] #CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED </pre>		<pre> CALL_0 (LCI) CLRC_U110 (LCI) CLR_1 (LCI) STRT_1DTEA </pre>	<pre> (P) (P) F </pre>	<pre> 1 1 </pre>
Extended Comments:				
1) no information, packet type invalid, invalid for P3, not allowed, too short				

Test Case Dynamic Behaviour				
Reference: PACKET/P3/INOPPORTUNE/P01				
Identifier: P6_301				
Purpose: Verify the IUT clears an Incoming Call received in state P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD_RESP !CALL +P3_INOPP +R1_POSTAMBLE ?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED		CALL_0 (LCI) CALL_0 (LCI)	(P) F	

Test Case Dynamic Behaviour				
Reference: PACKET/P3/INOPPORTUNE/P03				
Identifier: P6_303				
Purpose: Verify the IUT clears a Call Connected packet received in state P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD_RESP !ACCEPT START TD_RESP +P3_INOPP +R1_POSTAMBLE ?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED		CALL_0 (LCI) ANSR_0 (LCI)	(P) F	

Test Case Dynamic Behaviour				
Reference: PACKET/P3/INOOPORTUNE/P04				
Identifier: P6_304				
Purpose: Verify the IUT clears a Clear Confirmation packet received in state P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD_RESP !CLEARC START TD_RESP +P3_INOPP +R1_POSTAMBLE ?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED		CALL_0 (LCI) CLRC_0 (LCI)	(P) F	

Test Case Dynamic Behaviour				
Reference: PACKET/P3/INOOPORTUNE/P05				
Identifier: P6_305				
Purpose: Verify the IUT clears a Data packet received in state P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD_RESP !DATA START TD_RESP +P3_INOPP +R1_POSTAMBLE ?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED		CALL_0 (LCI) D_ONE (LCI)	(P) F	

Test Case Dynamic Behaviour				
Reference: PACKET/P3/INOPPORTUNE/P06				
Identifier: P6_306				
Purpose: Verify the IUT clears an Interrupt packet received in state P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD_RESP !INT START TD_RESP +P3_INOPP +R1_POSTAMBLE ?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED		CALL_0 (LCI) INT_0 (LCI)	(P) F	

Test Case Dynamic Behaviour				
Reference: PACKET/P3/INOPPORTUNE/P06				
Identifier: P6_307				
Purpose: Verify the IUT clears an Interrupt Confirm received in state P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD_RESP !INTC START TD_RESP +P3_INOPP +R1_POSTAMBLE ?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED		CALL_0 (LCI) INTC_0 (LCI)	(P) F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P3/INOPPORTUNE/P08				
Identifier: P6_308				
Purpose: Verify the IUT clears an RR packet received in state P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD_RESP !RR START TD_RESP +P3_INOPP +R1_POSTAMBLE ?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED		CALL_0 (LCI) RR_0 (LCI)	(P) F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P3/INOPPORTUNE/P09				
Identifier: P6_309				
Purpose: Verify the IUT clears an RNR packet received in state P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD_RESP !RNR START TD_RESP +P3_INOPP +R1_POSTAMBLE ?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED		CALL_0 (LCI) RNR_0 (LCI)	(P) F	

Test Case Dynamic Behaviour				
Reference: PACKET/P3/INOOPORTUNE/P10				
Identifier: P6_310				
Purpose: Verify the IUT clears a Reset Indication received in state P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD_RESP !RESET START TD_RESP +P3_INOPP +R1_POSTAMBLE ?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED		CALL_0 (LCI) RST_0 (LCI)	(P) F	

Test Case Dynamic Behaviour				
Reference: PACKET/P3/INOOPORTUNE/P11				
Identifier: P6_311				
Purpose: Verify the IUT clears a Reset Confirmation received in state P3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD_RESP ?TIMEOUT TD_RESP !RESETC START TD_RESP +P3_INOPP +R1_POSTAMBLE ?TIMEOUT TD_RESP +P3_UNEXPECTED +P3_UNEXPECTED		CALL_0 (LCI) RSTC_0 (LCI)	(P) F	

Packet Layer Group 7: State P4 Data Transfer

PLG 7 contains the test cases for the Setup and Clearing STATE p4, and does not include specific tests for optional facilities.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P4/PROPER/P01				
Identifier: P7_101				
Purpose: Verify the IUT acknowledges a Clear with cause code '01'H received in state P4				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P4D1_PREAMBLE !CLEAR START TD ?CLEARC CANCEL TD +R1_POSTAMBLE ?CLEAR CANCEL TD +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] CANCEL TD !RESTARTC +R1_POSTAMBLE +D1A_UNEXPECTED GOTO L1 +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD	L1	CLR_C01 (LCI) CLR_C_1 (LCI) CLR_1 (LCI) SIRT_1DTEA STRTC	(P) (P) (P) F F	
Extended Comments :				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P4/PROPER/P02				
Identifier: P7_102				
Purpose: Verify the IUT acknowledges a Clear with cause code '05'H while in state P4				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P4D1_PREAMBLE !CLEAR START TD ?CLEARC CANCEL TD +R1_POSTAMBLE ?CLEAR CANCEL TD +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] CANCEL TD !RESTARTC +R1_POSTAMBLE +D1A_UNEXPECTED GOTO L1 +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD	L1	CLR_C05 (LCI) CLRC_1 (LCI) CLR_1 (LCI) STRT_1DTEA STRTC	(P) (P) (P) F F	
Extended Comments:				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P4/PROPER/P03				
Identifier: P7_103				
Purpose: Verify the IUT acknowledges a Clear with cause code '11'H while in state P4				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P4D1_PREAMBLE				
!CLEAR START TD ?CLEARC CANCEL TD	L1	CLR_C11 (LCI) CLRC_1 (LCI)	(P)	
+R1_POSTAMBLE				
?CLEAR CANCEL TD		CLR_1 (LCI)	(P)	
+R1_POSTAMBLE				
?RESTART [RST_ON_ERR_C] CANCEL TD		STRT_1DTEA	(P)	
!RESTARTC +R1_POSTAMBLE		STRTC		
+D1A_UNEXPECTED GOTO L1				
+RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD			F F	
Extended Comments :				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P4/PROPER/P05				
Identifier: P7_105				
Purpose: Verify the IUT acknowledges a Clear with cause code '21'H while in state P4				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P4D1_PREAMBLE !CLEAR START TD ?CLEARC CANCEL TD +R1_POSTAMBLE ?CLEAR CANCEL TD +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] CANCEL TD !RESTARTC +R1_POSTAMBLE +D1A_UNEXPECTED GOTO L1 +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD	L1	CLR_C21 (LCI) CLRC_1 (LCI) CLR_1 (LCI) STRT_1DTEA STRTC	(P) (P) (P) F F	
Extended Comments:				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P4/IMPROPER/P01				
Identifier: P7_201				
Purpose: Verify the IUT clears a too short Incoming Call packet received in state P4				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P4D1_PREAMBLE !CALL START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG23 OR DIAG32 OR DIAG38)) OR #CAUSE_EQ_128] CANCEL TD !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG16 OR DIAG23 OR DIAG32 #OR DIAG38)) OR CAUSE_EQ_128] CANCEL TD !RESTARTC +R1_POSTAMBLE +D1A_UNEXPECTED GOTO L1 +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD	L1	CALL_SHT(LCI) CLR_1(LCI) CLRC_0(LCI) STRT_1DTEA STRTC	(P) (P) F F	1
Extended Comments :				
1) normal clear, packet type invalid, invalid for P4, not allowed, too short				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P4/IMPROPER/P02				
Identifier: P7_202				
Purpose: Verify the IUT clears a too long Incoming Call packet (user data field of 17 or 129 octets) received in state P4				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (SVC) +P4D1_PREAMBLE [FAST_SELECT = TRUE] !CALL START TD # +SUBTREE [FAST_SELECT = FALSE] !CALL START TD +SUBTREE SUBTREE ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR DIAG16 #OR DIAG23 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL TD +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG16 OR DIAG23 OR DIAG32 OR #DIAG39)) OR CAUSE_EQ_128] CANCEL TD +GEN2_POSTAMBLE +D1A_UNEXPECTED GOTO L1 +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>	L1	CALL_U129 (LCI)		1
		CALL_U17 (LCI)		1
		CLR_1 (LCI)	(P)	2
		STRT_1DTEA	(P)	
			F	
			F	
Extended Comments:				
1) if Fast Select is supported and in use then send 129 octets of user data, otherwise send 17 octets.				
2) normal clear, packet type invalid, invalid for p4, not allowed, too short				

Test Case Dynamic Behaviour				
Reference: PACKET/P4/IMPROPER/P03				
Identifier: P7_203				
Purpose: Verify the IUT clears a too long Call Connected packet (user data field of 1 or 129 octets) received in P4				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P4D1_PREAMBLE [FAST_SELECT = TRUE] !ACCEPT START TD # +SUBTREE [FAST_SELECT = FALSE] !ACCEPT START TD +SUBTREE SUBTREE ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR DIAG16 #OR DIAG23 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 AND # (DIAG0 OR DIAG16 OR DIAG23 OR DIAG32 OR #DIAG39)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE +D1A_UNEXPECTED GOTO L1 +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD	L1	ANSR_0U129 (LCI)		1
		ANSR_0U1 (LCI)		1
		CLR_1 (LCI)	(P)	2
		STRT_1DTEA	(P)	
			F	
			F	
Extended Comments:				
1) if Fast Select is supported and in use then send 129 octets of user data, otherwise send 1 octet of user data. 2) normal clear, packet type invalid, invalid for p4, not allowed, too long				

Test Case Dynamic Behaviour				
Reference: PACKET/P4/IMPROPER/P04				
Identifier: P7_204				
Purpose: Verify the IUT clears a too short Clear Indication packet (no cause code or diagnostic code fields) received in state P4				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (SVC) +P4D1_PREAMBLE !CLEAR START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG23 OR DIAG27 OR DIAG32 OR #DIAG38)) OR CAUSE_EQ_128] CANCEL !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG16 OR DIAG23 OR DIAG27 #OR DIAG32 OR DIAG38)) OR CAUSE_EQ_128] #CANCEL !RESTARTC +R1_POSTAMBLE +D1A_UNEXPECTED GOTO L1 +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>	L1	<pre> CLR_SHT (LCI) CLR_1 (LCI) CLR_0 (LCI) STRT_1DTEA STRTC </pre>	(P)	1
Extended Comments:				
1) normal clear, packet type invalid, invalid for P4, invalid for D1, not allowed, too short				

STANDARDSDIG.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P4/IMPROPER/P05 Identifier: P7_205 Purpose: Verify the IUT clears a too long Clear Indication packet received in state P4 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P4D1_PREAMBLE !CLEAR START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG23 OR DIAG27 OR DIAG32 OR #DIAG39)) OR CAUSE_EQ_128] CANCEL !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG16 OR DIAG23 OR DIAG27 #OR DIAG32 OR DIAG38)) OR CAUSE_EQ_128] #CANCEL !RESTARTC +R1_POSTAMBLE +D1A_UNEXPECTED GOTO L1 +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD	L1	CLR_LNG (LCI) CLR_1 (LCI) CLRC_0 (LCI) STRT_1DTEA STRTC	(P) F F	1
Extended Comments : 1) no info, packet type invalid, invalid for P4, invalid for D1, not allowed, too long				

Test Case Dynamic Behaviour				
Reference: PACKET/P4/IMPROPER/P06				
Identifier: P7_206				
Purpose: Verify the IUT clears a too long Clear Confirmation packet (110 octets appended to the end of the packet) received in state P4				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (SVC) +P4D1_PREAMBLE !CLEARC START TD # ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG23 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG16 OR DIAG23 OR DIAG32 #OR DIAG39)) OR CAUSE_EQ_128] CANCEL !RESTARTC +R1_POSTAMBLE +D1A_UNEXPECTED GOTO L1 +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>	L1	CLRC_U110 (LCI) CLR_1 (LCI)	(P)	1
		CLRC_0 (LCI)		
		STRT_1DTEA	(P)	
		STRTC		
			F	
			F	
Extended Comments:				
1) normal clear, packet type invalid, invalid for p4, not allowed, too long				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P4/INOPPORTUNE/P01				
Identifier: P7_301				
Purpose: Verify the IUT clears an Incoming Call packet received in state P4				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P4D1_PREAMBLE !CALL START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG23)) OR CAUSE_EQ_128] CANCEL !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG16 OR DIAG23)) OR #CAUSE_EQ_128] CANCEL !RESTARTC +R1_POSTAMBLE +D1A_UNEXPECTED GOTO L1 +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD	L1	CALL_0 (LCI) CLR_1 (LCI) CLRC_0 (LCI) STRT_1DTEA STRTC	(P) (P) F F	1
Extended Comments:				
1) normal clear, packet type invalid, invalid for P4				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P4/INOOPORTUNE/P03				
Identifier: P7_303				
Purpose: Verify the IUT clears a Call Connected packet received in state P4				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (SVC) +P4D1_PREAMBLE !ACCEPT START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG23)) OR CAUSE_EQ_128] CANCEL !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG16 OR DIAG23)) OR #CAUSE_EQ_128] CANCEL TD !RESTARTC +R1_POSTAMBLE +D1A_UNEXPECTED GOTO L1 +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>	L1	<pre> ANSR_0(LCI) CLR_1(LCI) CLRC_0(LCI) STRT_1DTEA STRTC </pre>	(P)	1
Extended Comments : 1) normal clear, packet type invalid, invalid for p4				

STANDARDSISO.COM · Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P4/INOPPORTUNE/P04				
Identifier: P7_304				
Purpose: Verify the IUT clears a Clear Confirmation packet received in state P4				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (SVC) +P4D1_PREAMBLE !CLEARC START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG23)) OR CAUSE_EQ_128] CANCEL !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG16 OR DIAG23)) OR #CAUSE_EQ_128] CANCEL TD !RESTARTC +R1_POSTAMBLE +D1A_UNEXPECTED GOTO L1 +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>	L1	CLRC_0(LCI) CLR_1(LCI)	(P)	1
		CLRC_0(LCI)	(P)	
		STRT_1DTEA	(P)	
		STRTC		
			F	
			F	
Extended Comments :				
1) normal clear, packet type invalid, invalid for p4				

Packet Layer Group 8: State P5 Call Collision

PLG 8 contains the test cases for the Setup and Clearing STATE p5, and does not include specific tests for optional facilities. STATE p5 is not applicable when testing Permanent Virtual Circuits, Incoming Calls only or Outgoing Calls only IUTs.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P5/PROPER/P01				
Identifier: P8_101				
Purpose: Verify P5 to P4 transition using a Call Connected packet				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P5_PREAMBLE !ACCEPT START TD ?TIMEOUT TD +P4_POSTAMBLE +D1A_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD	L1	ANSR_0 (LCI)	(P)	1
Extended Comments :				
1) no response from the IUT, the IUT is in Data Transfer state P4				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P5/PROPER/P02				
Identifier: P8_102				
Purpose: Verify the IUT confirms a Clear with cause '01'H received in state P5				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P5_PREAMBLE				
!CLEAR START TD ?CLEARC CANCEL TD		CLR_C01 (LCI) CLR_C1 (LCI)	(P)	
+R1_POSTAMBLE				
?RESTART [RST_ON_ERR_C] CANCEL TD		STRT_1DTEA	(P)	
!RESTARTC +R1_POSTAMBLE		STRTC		
?CLEAR CANCEL TD		CLR_1 (LCI)	(P)	
+R1_POSTAMBLE				
+RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD			F F	
Extended Comments :				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P5/PROPER/P03				
Identifier: P8_103				
Purpose: Verify the IUT confirms a Clear with cause '05'H received in state P5				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P5_PREAMBLE				
!CLEAR START TD ?CLEARC CANCEL TD		CLR_C05 (LCI) CLRC_1 (LCI)	(P)	
+R1_POSTAMBLE				
?RESTART [RST_ON_ERR_C] CANCEL TD		STRT_1DTEA	(P)	
!RESTARTC +R1_POSTAMBLE		STRTC		
?CLEAR CANCEL TD		CLR_1 (LCI)	(P)	
+R1_POSTAMBLE				
+RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD			F F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P5/PROPER/P04				
Identifier: P8_104				
Purpose: Verify the IUT confirms a Clear with cause '11'H received in state P5				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P5_PREAMBLE !CLEAR START TD ?CLEARC CANCEL TD +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] CANCEL TD !RESTARTC +R1_POSTAMBLE ?CLEAR CANCEL TD +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CLR_C11 (LCI) CLRC_1 (LCI) STRT_1DTEA STRTC CLR_1 (LCI)	(P) (P) (P) F F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P5/PROPER/P05				
Identifier: P8_105				
Purpose: Verify the IUT confirms a Clear with cause '13'H received in state P5				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P5_PREAMBLE				
!CLEAR START TD ?CLEARC CANCEL TD		CLR_C13 (LCI) CLRC_1 (LCI)	(P)	
+R1_POSTAMBLE				
?RESTART [RST_ON_ERR_C] CANCEL TD		STRT_1DTEA	(P)	
!RESTARTC +R1_POSTAMBLE		STRTC		
?CLEAR CANCEL TD		CLR_1 (LCI)	(P)	
+R1_POSTAMBLE				
+RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD			F F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P5/PROPER/P06				
Identifier: P8_106				
Purpose: Verify the IUT confirms a Clear with cause '21'H received in state P5				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P5_PREAMBLE				
!CLEAR START TD ?CLEARC CANCEL TD		CLR_C21 (LCI) CLRC_1 (LCI)	(P)	
+R1_POSTAMBLE				
?RESTART [RST_ON_ERR_C] CANCEL TD		STRT_1DTEA	(P)	
!RESTARTC +R1_POSTAMBLE		STRTC		
?CLEAR CANCEL TD		CLR_1 (LCI)	(P)	
+R1_POSTAMBLE				
+RSTRT_UNEXPECTED ?TIMEOUT TD			F	
?OTHERWISE CANCEL TD			F	
Extended Comments :				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P5/IMPROPER/P01				
Identifier: P8_201				
Purpose: Verify IUT clears a too short packet (PTI field is NIL) received in state P5				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (NO_LC) +P5_PREAMBLE !ERROR START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG33 OR DIAG38)) OR #CAUSE_EQ_128] CANCEL TD !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR DIAG33 #OR DIAG38)) OR CAUSE_EQ_128] CANCEL TD !RESTARTC +R1_POSTAMBLE +RSTRT_UNEXPECTED. ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>		<pre> ERR_SHT (LCI) CLR_1 (LCI) </pre>	(P)	1
		CLRC_0 (LCI)		
		STRT_1DTEA	(P)	
		STRIC		
			F	2
			F	
Extended Comments:				
1) no information, not allowed, unidentifiable, too short				
2) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P5/IMPROPER/P02				
Identifier: P8_202				
Purpose: Verify the IUT Clears a packet of undefined type (PTI equal '0D'H) received in state P5				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P5_PREAMBLE !ERROR START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG33)) OR CAUSE_EQ_128] CANCEL !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [# (CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR #DIAG33)) OR CAUSE_EQ_128] CANCEL TD !RESTARTC +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		ERR_B (LCI) CLR_1 (LCI) CLRC_0 (LCI) STRT_IDTEA STRTC	(P) (P) F F	1 2
Extended Comments:				
1) no information, packet type invalid, invalid for p5, not allowed, unidentifiable				
2) no response				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P5/IMPROPER/P03				
Identifier: P8_203				
Purpose: Verify the IUT Clears a Restart packet on an assigned LCI not equal to zero received in state P5				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P5_PREAMBLE !RESTART START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG41)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [# (CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR #DIAG41)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		STRT_NZ (LCI) CLR_1 (LCI)	(P)	1
		STRT_IDTEA	(P)	1
			F F	2
Extended Comments:				
1) no information, not allowed, non-zero lcn				
2) no response				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P5/IMPROPER/P04 Identifier: P8_204 Purpose: Verify the IUT Clears a Restart Confirmation packet on an assigned LCI not equal to zero received in state P5 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P5_PREAMBLE !RESTARTC START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG41)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR #DIAG41)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		STRTC_NZ (LCI) CLR_1 (LCI)	(P)	1
		STRT_1DTEA	(P)	1
			F F	2
Extended Comments: 1) no information, not allowed, non-zero lcn 2) no response				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P5/IMPROPER/P05				
Identifier: P8_205				
Purpose: Verify the IUT Clears a too short Incoming Call packet; no called address field, received in state P5				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P5_PREAMBLE !CALL START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG24 OR DIAG32 OR DIAG38)) OR #CAUSE_EQ_128] CANCEL TD !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG16 OR DIAG24 OR DIAG32 #OR DIAG38)) OR CAUSE_EQ_128] CANCEL TD !RESTARTC +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CALL_SHT(LCI) CLR_1(LCI) CLRC_0(LCI) STRT_1DTEA STRTC	(P) (P) F F	1 2
Extended Comments:				
1) no information, not allowed, too short				
2) no response				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P5/IMPROPER/P06				
Identifier: P8_206				
Purpose: Verify the IUT Clears or discards a too long Incoming Call packet (user data field of 17 or 129 octets) received in state P5				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P5_PREAMBLE [FAST_SELECT = TRUE] !CALL START TD # +SUBTREE [FAST_SELECT = FALSE] !CALL START TD +SUBTREE SUBTREE ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR DIAG16 #OR DIAG24 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 AND # (DIAG0 OR DIAG16 OR DIAG24 OR DIAG32 OR #DIAG39)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CALL_U129 (LCI) CALL_U17 (LCI) CLR_1 (LCI) STRT_1DTEA	(P) (P) P F	1 1 3 3 2
Extended Comments:				
1) if Fast Select is supported and in use then send 129 octets of user data, otherwise send 17 octets.				
2) discarding of a too long Incoming Call packet by the IUT in state P5 is also acceptable behaviour				
3) no information, packet type invalid, invalid for p5, not allowed, too long				

Test Case Dynamic Behaviour

Reference: PACKET/P5/IMPROPER/P07

Identifier: P8_207

Purpose: Verify the IUT Clears a too long Call Connected packet (user data field of 1 or 129 octets) received in state P5

Default:

Behaviour Description	Label	Constraints Reference	V	Comments
<pre>+P1_PREAMBLE (NO_LC) +P5_PREAMBLE [FAST_SELECT = TRUE] !ACCEPT START TD # +SUBTREE [FAST_SELECT = FALSE] !ACCEPT START TD +SUBTREE SUBTREE ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 #OR DIAG39)) OR CAUSE_EQ_128] CANCEL !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL !RESTARTC +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD</pre>		<pre>ANSR_0U129 (LCI) ANSR_0U1 (LCI)</pre>		<pre>1 1 (P) 2, 3 (P) 3</pre>

Extended Comments:

- 1) if Fast Select is supported and in use then send 129 octets of user data, otherwise send 1 octet of user data.
- 2) IUTs using Fast Select but which require Fast Select with Restriction on Response, may be unable to pass this test case.
- 3) no information, packet type invalid

Test Case Dynamic Behaviour				
Reference: PACKET/P5/ IMPROPER/P08				
Identifier: P8_208				
Purpose: Verify the IUT Clears a too short Clear Indication packet (no cause or diagnostic code fields) received in state P5				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P5_PREAMBLE !CLEAR START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG38)) OR CAUSE_EQ_128] CANCEL !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG38)) OR #CAUSE_EQ_128] CANCEL !RESTARTC +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CLR_SHT (LCI) CLR_1 (LCI) CLRC_0 (LCI) STRT_1DTEA STRTC	(P) (P) F F	1 2
Extended Comments:				
1) no information, packet not allowed, too short				
2) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P5/IMPROPER/P09				
Identifier: P8_209				
Purpose: Verify the IUT Clears a too long Clear Indication packet received in state P5				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P5_PREAMBLE !CLEAR START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG39 OR DIAG42)) OR #CAUSE_EQ_128] CANCEL !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG39 OR DIAG42)) #OR CAUSE_EQ_128] CANCEL !RESTARTC +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CLR_LNG (LCI) CLR_1 (LCI) CLRC_0 (LCI) STRT_1DTEA STRTC	(P) (P) F F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P5/IMPROPER/P10				
Identifier: P8_210				
Purpose: Verify the IUT Clears a too long Clear Confirmation packet. (110 octets appended to the end of the packet) received in state P5				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre>+P1_PREAMBLE (NO_LC) +P5_PREAMBLE [CCITT_80] !CLEARC START TD +SUBTREE [CCITT_84 OR ISO] !CLEARC START TD # +SUBTREE SUBTREE ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR DIAG16 #OR DIAG24 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG16 OR DIAG24 OR DIAG32 OR #DIAG39)) OR CAUSE_EQ_128] CANCEL !RESTARTC +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD</pre>		<pre>CLRC_U1 (LCI) CLRC_U110 (LCI) CLR_1 (LCI) CLRC_0 (LCI) STRT_1DTEA STRTC</pre>	<pre> (P) (P) </pre>	<pre>1 2</pre>
Extended Comments:				
1) Basic Format Clear Confirmation: plus 110 octets.				
2) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P5/INOOPORTUNE/P01				
Identifier: P8_301				
Purpose: Verify IUT clears an Incoming Call received in state P5				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P5_PREAMBLE !CALL START TD +P5_INOPP +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CALL_0 (LCI)	(P) F F	 no response

Test Case Dynamic Behaviour				
Reference: PACKET/P5/INOOPORTUNE/P03				
Identifier: P8_303				
Purpose: Verify the IUT Clears a Clear Confirmation received in state P5				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P5_PREAMBLE !CLEARC START TD +P5_INOPP +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CLRC_0 (LCI)	(P) F F	 1
Extended Comments:				
1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P5/ INOPPORTUNE/P04				
Identifier: P8_304				
Purpose: Verify the IUT Clears a Data packet received in state P5				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P5_PREAMBLE !DATA START TD +P5_INOPP +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		D_ONE (LCI)	(P) F F	1
Extended Comments:				
1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P5/ INOPPORTUNE/P05				
Identifier: P8_305				
Purpose: Verify the IUT Clear and Interrupt packet received in state P5				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_IC) +P5_PREAMBLE !INT START TD +P5_INOPP +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		INT_0 (LCI)	(P) F F	1
Extended Comments:				
1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P5/ INOPPORTUNE/P06				
Identifier: P8_306				
Purpose: Verify the IUT Clears an Interrupt packet received in state P5				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P5_PREAMBLE !INTC START TD +P5_INOPP +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		INTC_0 (LCI)	(P)	1
Extended Comments:				
1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P5/ INOPPORTUNE/P07				
Identifier: P8_307				
Purpose: Verify the IUT Clears a Receiver Ready (RR) packet received in state P5				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P5_PREAMBLE !RR START TD +P5_INOPP +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		RR_0 (LCI)	(P)	1
Extended Comments:				
1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P5/INOPPORTUNE/P08				
Identifier: P8_308				
Purpose: Verify the IUT Clears a Receiver Ready (RNR) packet received in state P5				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P5_PREAMBLE !RNR START TD +P5_INOPP +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		RNR_0 (LCI)	(P) F F	1
Extended Comments:				
1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P5/INOPPORTUNE/P09				
Identifier: P8_309				
Purpose: Verify the IUT Clears a Reset Indication packet received in state P5				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P5_PREAMBLE !RESET START TD +P5_INOPP +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		RST_0 (LCI)	(P) F F	1
Extended Comments:				
1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P5/INOOPORTUNE/P10				
Identifier: P8_310				
Purpose: Verify the IUT Clears a Reset Confirmation packet received in state P5				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) +P5_PREAMBLE !RESETC START TD +P5_INOPP +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		RSTC_0 (LCI)	(P) F F	1
Extended Comments :				
1) no response				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Packet Layer Group 9: State P6 DTE Clear Request

PLG 9 contains the test cases for the Setup and Clearing STATE p6, and does not include specific tests for optional facilities. STATE p6 is not applicable when testing Permanent Virtual Circuits or to IUTs which do not implement the CLEAR procedure.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P6/PROPER/P01				
Identifier: P9_101				
Purpose: Verify the IUT accepts a Clear with cause code '01'H received in state P6				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE !CLEAR START TD ?TIMEOUT TD +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		CLR_C01 (LCI)	(P) F	1
Extended Comments:				
1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P6/PROPER/P02				
Identifier: P9_102				
Purpose: Verify the IUT accepts a clear with cause code '05'H received in state P6				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE !CLEAR START TD ?TIMEOUT TD +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		CLR_C05 (LCI)	(P) F	1
Extended Comments:				
1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P6/PROPER/P03				
Identifier: P9_103				
Purpose: Verify the IUT accepts a clear with cause code '11'H received in state P6				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE !CLEAR START TD ?TIMEOUT TD +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		CLR_C11 (LCI)	(P) F	1
Extended Comments: 1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P6/PROPER/P04				
Identifier: P9_104				
Purpose: Verify the IUT accepts a clear with cause code '13'H received in state P6				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE !CLEAR START TD ?TIMEOUT TD +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		CLR_C13 (LCI)	(P) F	1
Extended Comments: 1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P6/PROPER/P05				
Identifier: P9_105				
Purpose: Verify the IUT accepts a clear with cause code '21' H received in state P6				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE !CLEAR START TD ?TIMEOUT TD +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		CLR_C21 (LCI)	(P) F	1
Extended Comments: 1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P6/PROPER/P06				
Identifier: P9_106				
Purpose: Verify the IUT accepts a valid Clear Confirmation received in state P6				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE !CLEARC START TD ?TIMEOUT TD +R1_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		CLRC_0 (LCI)	(P) F	1
Extended Comments: 1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P6/IMPROPER/P01				
Identifier: P9_201				
Purpose: Verify the IUT discards a too short packet (two octets) received in state P6				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE !ERROR START TD ?TIMEOUT TD +P6_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		ERR_SHT (LCI)	(P) F	1
Extended Comments: 1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P6/IMPROPER/P02				
Identifier: P9_202				
Purpose: Verify the IUT discards an unidentifiable packet received in state P6				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE !ERROR START TD ?TIMEOUT TD +P6_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		ERR_B (LCI)	(P) F	1
Extended Comments: 1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P6/IMPROPER/P03				
Identifier: P9_203				
Purpose: Verify the IUT discards Restart (LCI \diamond zero) received in state P6				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE !RESTART START TD ?TIMEOUT TD +P6_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		STRT_NZ (LCI)	(P) F	1
Extended Comments: 1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P6/IMPROPER/P04				
Identifier: P9_204				
Purpose: Verify the IUT discards a Restart Confirmation (LCI \diamond zero) received in state P6				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE !RESTARTC START TD ?TIMEOUT TD +P6_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		STRTC_NZ (LCI)	(P) F	1
Extended Comments: 1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P6/ IMPROPER/P05				
Identifier: P9_205				
Purpose: Verify the IUT discards a too short Incoming Call (no called address field) received in state P6				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE !CALL START TD ?TIMEOUT TD +P6_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		CALL_SHT (LCI)	(P) F	1
Extended Comments: 1) no response				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P6/IMPROPER/P06 Identifier: P9_206 Purpose: Verify the IUT discards a too long Incoming Call packet (user data field of 17 or 129 octets) received in state P6 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE(SVC) +P6_PREAMBLE [FAST_SELECT = TRUE] !CALL START TD # +SUBTREE [FAST_SELECT = FALSE] !CALL START TD +SUBTREE SUBTREE ?TIMEOUT TD +P6_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		 CALL_U129 (LCI) CALL_U17 (LCI)	 (P) F	 1 1 2
Extended Comments : 1) if Fast Select is supported and in use then send 129 octets of user data, otherwise send 17 octets. 2) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P6/IMPROPER/P07				
Identifier: P9_207				
Purpose: Verify the IUT discards a too long Call Connected packet (user data field of 1 or 129 octets) received in state P6.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE [FAST_SELECT = TRUE] !ACCEPT START TD # +SUBTREE [FAST_SELECT = FALSE] !ACCEPT START TD +SUBTREE SUBTREE		ANSR_OU129 (LCI)		1
?TIMEOUT TD +P6_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		ANSR_OU1 (LCI)	(P) F	1 2
Extended Comments:				
1) if Fast Select is supported and in use then send 129 octets of user data, otherwise send 1 octet of user data.				
2) no response				

STANDARDSISO.COM Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P6/IMPROPER/P08 Identifier: P9_208 Purpose: Verify the IUT Clears a too short Clear Indication packet (no cause code or diagnostic code fields) received in state P6. Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE !CLEAR START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG38)) OR CAUSE_EQ_128] CANCEL #TD +P6_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CLR_SHT (LCI) CLR_1 (LCI)	(P) F F	1 2
Extended Comments:				
1) no information, not allowed, too short				
2) no response				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P6/IMPROPER/P09				
Identifier: P9_209				
Purpose: Verify the IUT Clears a too long Clear Indication packet (user data field of 129 octets) received in state P6				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE !CLEAR START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG39 OR DIAG42)) OR #CAUSE_EQ_128] CANCEL +P6_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CLR_LNG (LCI) CLR_1 (LCI)	(P) F F	1
Extended Comments:				
1) no response				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P6/IMPROPER/P10				
Identifier: P9_210				
Purpose: Verify the IUT Clears a too long Clear Confirmation (110 octets appended to the end of the packet) received in state P6.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE [CCITT_80] !CLEARC START TD +SUBTREE [CCITT_84] !CLEARC START TD # +SUBTREE SUBTREE ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR DIAG16 #OR DIAG25 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL +P6_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CLRC_U1 (LCI)		1
		CLRC_U110 (LCI)		
		CLR_1 (LCI)	(P)	2
			F F	3
Extended Comments:				
1) Basic Format Clear Confirmation: 110 octets appended				
2) no information, packet type invalid, invalid for p6, not allowed, too long				
3) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P6/ INOPPORTUNE/P01				
Identifier: P9_301				
Purpose: Verify the IUT discards an Incoming Call packet received in state P6				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE !CALL START TD ?TIMEOUT TD +P6_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		CALL_0 (LCI)	(P) F	
Extended Comments :				

Test Case Dynamic Behaviour				
Reference: PACKET/P6/ INOPPORTUNE/P03				
Identifier: P9_303				
Purpose: Verify the IUT discards a Call Connected received in state P6				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE !ACCEPT START TD ?TIMEOUT TD +P6_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		ANSR_0 (LCI)	(P) F	
Extended Comments :				

Test Case Dynamic Behaviour				
Reference: PACKET/P6/ INOPPORTUNE/P04				
Identifier: P9_304				
Purpose: Verify the IUT discards a Data packet received in state P6				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE !DATA START TD ?TIMEOUT TD +P6_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		D_ONE (LCI)	(P) F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P6/ INOPPORTUNE/P05				
Identifier: P9_305				
Purpose: Verify the IUT discards an Interrupt packet received in state P6				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE !INT START TD ?TIMEOUT TD +P6_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		INT_0 (LCI)	(P) F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P6/INOOPORTUNE/P06				
Identifier: P9_306				
Purpose: Verify the IUT discards an Interrupt Confirm received in state P6				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE !INTC START TD ?TIMEOUT TD +P6_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		INTC_0 (LCI)	(P) F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P6/INOOPORTUNE/P07				
Identifier: P9_307				
Purpose: Verify the IUT discards an RR packet received in state P6				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE !RR START TD ?TIMEOUT TD +P6_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		RR_0 (LCI)	(P) F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P6/ INOPPORTUNE/P08				
Identifier: P9_308				
Purpose: Verify the IUT discards an RNR packet received in state P6				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE !RNR START TD ?TIMEOUT TD +P6_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		RNR_0 (LCI)	(P) F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P6/ INOPPORTUNE/P09				
Identifier: P9_309				
Purpose: Verify the IUT discards a Reset packet received in state P6				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE !RESET START TD ?TIMEOUT TD +P6_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		RST_0 (LCI)	(P) F	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/P6/ INOPPORTUNE/P10				
Identifier: P9_310				
Purpose: Verify the IUT discards a Reset Confirmation received in state P6				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) +P6_PREAMBLE !RESETC START TD ?TIMEOUT TD +P6_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		RSTC_0 (LCI)	(P)	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Packet Layer Group 10: State P7 DXE Clear Indication

PLG 10 contains the test cases for the Setup and Clearing STATE p7, and does not include specific tests for optional facilities. STATE p7 is a transient state and may not be observable. This packet layer test group is applicable only if the IUT implements the Packet Layer Protocol such that STATE p7 is observable. PLG 10 is not applicable when testing Permanent Virtual Circuit.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P7/IMPROPER/P01 Identifier: P10_201 Purpose: Verify the IUT Clears a too short packet (two octets) received in state P7 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) !CLEAR START TD_RESP ?TIMEOUT TD_RESP !ERROR START TD_RESP ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG33 OR DIAG38)) OR #CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [# (CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR DIAG33 #OR DIAG38)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P7_UNEXPECTED +P7_UNEXPECTED		CLR_0 (LCI) ERR_SHT (LCI) CLR_1 (LCI) STRT_1DTEA	(P) (P) F	1
Extended Comments:				
1) no information, not allowed, unidentifiable, too short				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P7/IMPROPER/P02				
Identifier: P10_202				
Purpose: Verify the IUT Clears an unidentifiable packet received in state P7				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) !CLEAR START TD_RESP ?TIMEOUT TD_RESP !ERROR START TD_RESP ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG33)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR #DIAG33)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P7_UNEXPECTED +P7_UNEXPECTED		CLR_0 (LCI) ERR_B (LCI) CLR_1 (LCI) STRT_1DTEA	(P) (P) F	1
Extended Comments:				
1) no information, not allowed, unidentifiable				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P7/IMPROPER/P03				
Identifier: P10_203				
Purpose: Verify the IUT Clears a Restart Indication (LCI <> zero) received in state P7				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) !CLEAR START TD_RESP ?TIMEOUT TD_RESP !RESTART START TD_RESP ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG41)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR #DIAG41)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P7_UNEXPECTED +P7_UNEXPECTED		CLR_0 (LCI) STRT_NZ (LCI) CLR_1 (LCI)	(P)	1
Extended Comments: 1) no information, not allowed, non-zero lci				

STANDARDSISO.COM :: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P7/IMPROPER/P04				
Identifier: P10_204				
Purpose: Verify the IUT Clears a Restart Confirmation (LCI < zero) received in state P7				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) !CLEAR START TD_RESP ?TIMEOUT TD_RESP !RESTARTC START TD_RESP ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG41)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR #DIAG41)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P7_UNEXPECTED +P7_UNEXPECTED		CLR_0 (LCI) STRTC_NZ (LCI) CLR_1 (LCI) STRT_IDTEA	(P) (P) F	1
Extended Comments:				
1) no information, not allowed, non-zero lci				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P7/IMPROPER/P05 Identifier: P10_205 Purpose: Verify the IUT in state P7 Clears a too short Incoming Call (no called address field) received in state P7 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (SVC) !CLEAR START TD_RESP ?TIMEOUT TD_RESP !CALL START TD_RESP ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG38)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR #DIAG38)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P7_UNEXPECTED +P7_UNEXPECTED </pre>		<pre> CLR_0 (LCI) CALL_SHT (LCI) CLR_1 (LCI) STRT_1DTEA </pre>	<pre> (P) (P) F </pre>	<pre> 1 </pre>
Extended Comments : 1) no information, not allowed, too short				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P7/IMPROPER/P06				
Identifier: P10_206				
Purpose: Verify the IUT Clears a too long Incoming Call (user data field of 17 or 129 octets) received in state P7				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) !CLEAR START TD_RESP ?TIMEOUT TD_RESP [FAST_SELECT = TRUE] !CALL START TD_RESP # +SUBTREE [FAST_SELECT = FALSE] !CALL START TD_RESP +SUBTREE +P7_UNEXPECTED SUBTREE ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 #OR DIAG39)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 AND # (DIAG0 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P7_UNEXPECTED		CLR_0 (LCI) CALL_U129 (LCI) CALL_U17 (LCI)		1 1 2 (P) (P) F
Extended Comments:				
1) if Fast Select is supported and in use then send 129 octets of user data, otherwise send 17 octets.				
2) no information, not allowed, too long				

Test Case Dynamic Behaviour				
Reference: PACKET/P7/IMPROPER/P07				
Identifier: P10_207				
Purpose: Verify the IUT Clears a too long Call Connected packet (user data field of 1 or 129 octets) received in state P7				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) !CLEAR START TD_RESP ?TIMEOUT TD_RESP [FAST_SELECT = TRUE] !ACCEPT START TD_RESP # +SUBTREE [FAST_SELECT = FALSE] !ACCEPT START TD_RESP +SUBTREE +P7_UNEXPECTED SUBTREE ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 #OR DIAG39)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 AND # (DIAG0 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P7_UNEXPECTED		CLR_0 (LCI) ANSR_0U129 (LCI) ANSR_0U1 (LCI)		1 1 2 (P) (P) F
Extended Comments:				
1) if Fast Select is supported and in use then send 129 octets of user data, otherwise send 1 octet of user data. 2) no information, not allowed, too long				

Test Case Dynamic Behaviour				
Reference: PACKET/P7/IMPROPER/P08				
Identifier: P10_208				
Purpose: Verify the IUT discards a too short Clear Indication packet (no cause or diagnostic fields) received in state P7.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) !CLEAR START TD_RESP, START TO_P7, START #TD ?TIMEOUT TD_RESP		CLR_0 (LCI)		
!CLEAR ?TIMEOUT TO_P7 ?CLEARC CANCEL		CLR_SHT (LCI) CLRC_1 (LCI)	(P)	
+R1_POSTAMBLE ?CLEAR CANCEL		CLR_1 (LCI)	(P)	
+R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] CANCEL		STRT_1DTEA	(P)	
+GEN2_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL			F F	
+P7_UNEXPECTED +P7_UNEXPECTED				
Extended Comments:				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P7/IMPROPER/P09				
Identifier: P10_209				
Purpose: Verify the IUT discards a too long Clear Indication packet. (user data field of 129 octets) received in state P7				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) !CLEAR START TD_RESP, START TO_P7, START #TD ?TIMEOUT TD_RESP !CLEAR ?TIMEOUT TO_P7 ?CLEARC CANCEL +R1_POSTAMBLE ?CLEAR CANCEL +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +P7_UNEXPECTED +P7_UNEXPECTED		CLR_0 (LCI) CLR_LNG (LCI) CLRC_1 (LCI) CLR_1 (LCI) STRT_1DTEA	 (P) (P) (P) F F	
Extended Comments:				

STANDARDSISO.COM · Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P7/IMPROPER/P10				
Identifier: P10_210				
Purpose: Verify the IUT Clears a too long Clear Confirmation packet (110 octets appended) received in state P7				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) !CLEAR START TD_RESP ?TIMEOUT TD_RESP !CLEARC START TD_RESP # ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG39)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR #DIAG39)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P7_UNEXPECTED +P7_UNEXPECTED		CLR_0 (LCI) CLRC_U110 (LCI) CLR_1 (LCI) STRT_1DTEA	(P) (P) F	1
Extended Comments:				
1) no information, not allowed, too long				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P7/INOOPORTUNE/P01				
Identifier: P10_301				
Purpose: Verify the IUT Clears an Incoming Call received in state P7				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) !CLEAR START TD_RESP ?TIMEOUT TD_RESP !CALL START TD_RESP ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG26)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG16 OR DIAG26)) OR CAUSE_EQ_128] #CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P7_UNEXPECTED +P7_UNEXPECTED		CLR_0 (LCI) CALL_0 (LCI) CLR_1 (LCI) STRT_IDTEA	(P) (P) F	1 no response
Extended Comments:				
1) no information, packet type invalid, invalid for p7				

Test Case Dynamic Behaviour				
Reference: PACKET/P7/INOOPORTUNE/P03				
Identifier: P10_303				
Purpose: Verify the IUT Clears a Call Connected packet received in state P7				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) !CLEAR START TD_RESP ?TIMEOUT TD_RESP !ACCEPT START TD_RESP ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG26)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG16 OR DIAG26)) OR CAUSE_EQ_128] #CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P7_UNEXPECTED +P7_UNEXPECTED		CLR_0(LCI) ANSR_0(LCI) CLR_1(LCI)	(P) (P)	1 2
Extended Comments:				
1) no information, packet type invalid, invalid for p7				
2) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P7/INOPPORTUNE/P04				
Identifier: P10_304				
Purpose: Verify the IUT discards a Clear Indication with cause '01'H received in state P7				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) !CLEAR START TD_RESP, START TO_P7, START #TD ?TIMEOUT TD_RESP !CLEAR ?TIMEOUT TO_P7 ?CLEARC CANCEL TD +R1_POSTAMBLE ?CLEAR CANCEL TD +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] CANCEL #TD +GEN2_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +P7_UNEXPECTED +P7_UNEXPECTED		CLR_0 (LCI) CLR_C01 (LCI) CLRC_1 (LCI) CLR_1 (LCI) STRT_1DTEA	 (P) (P) (P) F F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P7/INOOPORTUNE/P05				
Identifier: P10_305				
Purpose: Verify the IUT discards a Clear Indication with cause code '05'H received in state P7				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) !CLEAR START TD_RESP, START TO_P7, START #TD ?TIMEOUT TD_RESP !CLEAR ?TIMEOUT TO_P7 ?CLEARC CANCEL TD +R1_POSTAMBLE ?CLEAR CANCEL TD +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] CANCEL #TD +GEN2_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +P7_UNEXPECTED +P7_UNEXPECTED		CLR_0 (LCI) CLR_C05 (LCI) CLRC_1 (LCI) CLR_1 (LCI) STRT_1DTEA	 (P) (P) (P) F F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P7/INOPPORTUNE/P06				
Identifier: P10_306				
Purpose: Verify the IUT discards a Clear Indication with cause '11'H received in state P7				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) !CLEAR START TD_RESP, START TO_P7, START #TD ?TIMEOUT TD_RESP !CLEAR ?TIMEOUT TO_P7 ?CLEARC CANCEL TD +R1_POSTAMBLE ?CLEAR CANCEL TD +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] CANCEL #TD +GEN2_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +P7_UNEXPECTED +P7_UNEXPECTED		CLR_0 (LCI) CLR_C11 (LCI) CLRC_1 (LCI) CLR_1 (LCI) STRT_1DTEA	 (P) (P) (P) F F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P7/INOPPORTUNE/P07				
Identifier: P10_307				
Purpose: Verify the IUT discards a Clear Indication with cause '13'H received in state P7				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) !CLEAR START TD_RESP, START TO_P7, START #TD ?TIMEOUT TD_RESP !CLEAR ?TIMEOUT TO_P7 ?CLEARC CANCEL TD +R1_POSTAMBLE ?CLEAR CANCEL TD +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] CANCEL #TD +GEN2_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +P7_UNEXPECTED +P7_UNEXPECTED		CLR_0 (LCI) CLR_C13 (LCI) CLRC_1 (LCI) CLR_1 (LCI) STRT_1DTEA	 (P) (P) (P) F F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P7/INOOPORTUNE/P08				
Identifier: P10_308				
Purpose: Verify the IUT discards a Clear Indication with cause '21' H received in state P7				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) !CLEAR START TD_RESP, START TO_P7, START #TD ?TIMEOUT TD_RESP !CLEAR ?TIMEOUT TO_P7 ?CLEARC CANCEL TD +R1_POSTAMBLE ?CLEAR CANCEL TD +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] CANCEL #TD +GEN2_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL +P7_UNEXPECTED +P7_UNEXPECTED		CLR_0 (LCI) CLR_C21 (LCI) CLRC_1 (LCI) CLR_1 (LCI) STRT_1DTEA	 (P) (P) (P) F F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P7/INOOPORTUNE/P09				
Identifier: P10_309				
Purpose: Verify the IUT clears a Clear Confirm packet received in state P7				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) !CLEAR START TD_RESP ?TIMEOUT TD_RESP !CLEARC START TD_RESP ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16) OR DIAG26) OR CAUSE_EQ_128] CANCEL !CLEARC +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG16) OR #DIAG26) OR CAUSE_EQ_128] CANCEL !RESTARTC +R1_POSTAMBLE ?TIMEOUT TD_RESP +P7_UNEXPECTED +P7_UNEXPECTED		CLR_0 (LCI) CLRC_0 (LCI) CLR_1 (LCI) CLRC_0 (LCI) STRT_1DTEA STRTC	 (P) (P) F	1 2
Extended Comments:				
1) no information, packet type invalid, invalid for p7, setup/clearing				
2) no response				

STANDARDSISO.COM . Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P7/INOPPORTUNE/P10				
Identifier: P10_310				
Purpose: Verify that IUT clears a Data packet received in state P7				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (SVC) !CLEAR START TD_RESP ?TIMEOUT TD_RESP !DATA ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG26)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG16 OR #DIAG26)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P7_UNEXPECTED +P7_UNEXPECTED </pre>		<pre> CLR_0 (LCI) D_ONE (LCI) CLR_1 (LCI) SRRT_1DTEA </pre>	<pre> (P) (P) F </pre>	<pre> 1 </pre>
Extended Comments:				
1) no information, packet type invalid, invalid for p7				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P7/INOPPORTUNE/P11				
Identifier: P10_311				
Purpose: Verify the IUT clears an Interrupt packet received in state P7				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) !CLEAR START TD_RESP ?TIMEOUT TD_RESP !INT START TD_RESP ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG26 OR DIAG32 OR DIAG44)) OR #CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [#{CAUSE_EQ_0 AND (DIAG0 OR DIAG16 OR DIAG26 #OR DIAG32 OR DIAG44)) OR CAUSE_EQ_128] #CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P7_UNEXPECTED +P7_UNEXPECTED		CLR_0 (LCI) INT_0 (LCI) CLR_1 (LCI) STRT_1DTEA	(P) (P) F	1
Extended Comments:				
1) no information, packet type invalid, invalid for p7, not allowed, unauthorized interrupt				

STANDARDSISO.COM · Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P7/INOPPORTUNE/P12				
Identifier: P10_312				
Purpose: Verify the IUT clears an Interrupt Confirmation received in state P7				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (SVC) !CLEAR START TD_RESP ?TIMEOUT TD_RESP !INTC START TD_RESP ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG26 OR DIAG32 OR DIAG43)) OR #CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG16 OR DIAG26 #OR DIAG32 OR DIAG43)) OR CAUSE_EQ_128] #CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P7_UNEXPECTED +P7_UNEXPECTED </pre>		<pre> CLR_0 (LCI) INTC_0 (LCI) CLR_1 (LCI) STRT_1DTEA </pre>	<pre> (P) (P) F </pre>	1
Extended Comments:				
1) no information, packet type invalid, invalid for p7, not allowed, unauthorized interrupt confirmation				

STANDARDSISO.COM · Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P7/INOPPORTUNE/P13				
Identifier: P10_313				
Purpose: Verify the IUT clears an RR packet received in state P7				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) !CLEAR START TD_RESP ?TIMEOUT TD_RESP !RR START TD_RESP ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG26 OR DIAG32)) OR #CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG16 OR DIAG26 OR DIAG32)) OR #CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P7_UNEXPECTED +P7_UNEXPECTED		CLR_0 (LCI) RR_A (LCI) CLR_1 (LCI) STRT_1DTEA	(P) (P) F	1 no response
Extended Comments :				
1) no information, packet type invalid, invalid for p7, not allowed				

Test Case Dynamic Behaviour				
Reference: PACKET/P7/INOOPORTUNE/P14				
Identifier: P10_314				
Purpose: Verify the IUT clears RNR packet received in state P7				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) !CLEAR START TD_RESP ?TIMEOUT TD_RESP !RNR START TD_RESP ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG26 OR DIAG32)) OR #CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG16 OR DIAG26 OR DIAG32)) OR #CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P7_UNEXPECTED +P7_UNEXPECTED		CLR_0 (LCI) RNR_0 (LCI) CLR_1 (LCI)	(P) (P)	1 no response
Extended Comments:				
1) no information, packet type invalid, invalid for p7, not allowed				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/P7/INOOPPORTUNE/P15				
Identifier: P10_315				
Purpose: Verify the IUT clears a Reset packet received in state P7				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) !CLEAR START TD_RESP ?TIMEOUT TD_RESP !RESET ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG26 OR DIAG32)) OR #CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG16 OR DIAG26 OR DIAG32)) OR #CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P7_UNEXPECTED +P7_UNEXPECTED		CLR_0 (LCI) RST_0 (LCI) CLR_1 (LCI) STRT_1DTEA	(P) (P) F	1 2
Extended Comments:				
1) no information, packet type invalid, invalid for p7, not allowed				
2) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/P7/INOOPORTUNE/P16				
Identifier: P10_316				
Purpose: Verify the IUT clears a Reset Confirmation received in state P7				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (SVC) !CLEAR START TD_RESP ?TIMEOUT TD_RESP !RESETC START TD_RESP ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG26 OR DIAG32)) OR #CAUSE_EQ_128] CANCEL TO_P7 +GEN1_POSTAMBLE ?RESTART [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG16 OR DIAG26 OR DIAG32)) OR #CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD_RESP +P7_UNEXPECTED +P7_UNEXPECTED		CLR_0 (LCI) RSTC_0 (LCI) CLR_1 (LCI) STRT_IDTEA	(P) (P) F	1 2
Extended Comments :				
1) no information, packet type invalid, invalid for p7, not allowed.				
2) no response				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Packet Layer Group 11: State D1 Flow Control Ready

PLG 11 contains the test cases for the Reset STATE d1, and does not include specific tests for optional facilities. This packet layer test group is applicable to IUTs supporting Permanent Virtual Circuit and/or Virtual Call services.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/D1/PROPER/P01				
Identifier: P11_101				
Purpose: Verify the IUT accepts a Reset Indication received in state D1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RESET START TD ?RESETC CANCEL TD +D1_POSTAMBLE ?RESET CANCEL TD +D1_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] CANCEL TD +D_STATE_CLR ?RESTART [RST_ON_ERR_R] CANCEL TD +D_STATE_RES +D1_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD	L1	RST_0 (LCI) RSTC_1 (LCI) RST_1 (LCI) CLR_1 (LCI) STRT_1DTEA	(P) (P) (P) (P) F F	1
Extended Comments:				
1) no response				

STANDARDS ISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/D1/PROPER/P02				
Identifier: P11_102				
Purpose: Verify the IUT can accept Data in state D1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !DATA START TD ?RR CANCEL TD +D1_POSTAMBLE ?TIMEOUT TD +D1_POSTAMBLE +D1_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD	L1	D_ONE (LCI) RR_1A (LCI)	(P) F	
Extended Comments:				
This test case is only applicable to IUTs that support Reset.				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/D1/PROPER/P03				
Identifier: P11_103				
Purpose: Verify the IUT can accept Data after a Reset/Reset Confirmation exchange in state D1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE				
!DATA START TD ?RR CANCEL TD +SUBTREE	L1	D_ONE (LCI) RR_1A (LCI)		
?TIMEOUT TD +SUBTREE				
+D1_UNEXPECTED GOTO L1				
+CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD			F	
SUBTREE				
!RESET START TD ?RESETC CANCEL TD	L2	RST_0 (LCI) RSTC_1 (LCI)		
!DATA START TD ?RR CANCEL TD	L3	D_ONE (LCI) RR_1A (LCI)	(P)	
+D1_POSTAMBLE				
?TIMEOUT TD			(P)	
+D1_POSTAMBLE				
+D1_UNEXPECTED GOTO L3				
+CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD			F	

[4]
Continued on next page

..... Continued from previous page.
 [2]

Behaviour Description	Label	Constraints Reference	V	Comments
+D1_UNEXPECTED GOTO L2				
+CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD			F F	
Extended Comments:				
This test case is only applicable to IUTs that support Reset.				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/D1/IMPROPER/P01				
Identifier: P11_201				
Purpose: Verify the IUT Resets a too short packet (two octets) received in state D1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !ERROR START TD ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG33 OR DIAG38)) OR #CAUSE_EQ_128] CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG33 OR DIAG38)) #OR CAUSE_EQ_128] CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG33 OR DIAG38)) #OR CAUSE_EQ_128] CANCEL +D_STATE_RES +D1C_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>	L1	ERR_SHT (LCI) RST_1 (LCI)	(P)	1
		CLR_1 (LCI)	(P)	
		STRT_1DTEA	(P)	
			F	no response
			F	
Extended Comments:				
1) no information, not allowed, unidentifiable packet, too short				

Test Case Dynamic Behaviour				
Reference: PACKET/D1/IMPROPER/P02				
Identifier: P11_202				
Purpose: Verify the IUT Resets an unidentifiable packet (PTI field equals '0D'H) received in state D1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !ERROR START TD ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG33)) OR CAUSE_EQ_128] CANCEL #TD +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG33)) OR #CAUSE_EQ_128] CANCEL TD +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG33)) OR #CAUSE_EQ_128] CANCEL TD +D_STATE_RES +D1C_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>	L1	<pre> ERR_B (LCI) RST_1 (LCI) CLR_1 (LCI) STRT_1DTEA </pre>	<pre> (F) (P) (P) F F </pre>	1
Extended Comments:				
1) no information, not allowed, unidentifiable				

Test Case Dynamic Behaviour				
Reference: PACKET/D1/IMPROPER/P03				
Identifier: P11_203				
Purpose: Verify the IUT Resets a Restart Indication with an assigned LCI not equal to zero received in state D1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RESTART START TD ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG41)) OR CAUSE_EQ_128] CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG41)) OR #CAUSE_EQ_128] CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG41)) OR #CAUSE_EQ_128] CANCEL +D_STATE_RES +D1_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>	L1	STRT_NZ (LCI) RST_1 (LCI)	(P)	1
		CLR_1 (LCI)	(P)	
		STRT_1DTEA	(P)	
			F	no response
			F	
Extended Comments:				
1) no information, not allowed, non-zero lci				

Test Case Dynamic Behaviour				
Reference: PACKET/D1/IMPROPER/104				
Identifier: P11_204				
Purpose: Verify the IUT Resets a Restart Confirmation packet with an assigned LCI not equal to zero received in state D1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RESTARTC START TD ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG41)) OR CAUSE_EQ_128] CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG41)) OR #CAUSE_EQ_128] CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG41)) OR #CAUSE_EQ_128] CANCEL +D_STATE_RES +D1_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>	L1	STRTC_NZ (LCI) RST_1 (LCI)	(P)	1
		CLR_1 (LCI)	(P)	
		STRT_1DTEA	(P)	
			F	no response
			F	
Extended Comments:				
1) no information, not allowed, non-zero lci				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/D1/IMPROPER/P05 Identifier: P11_205 Purpose: Verify the IUT Resets a too short Reset Indication (Diagnostic field is NIL) received in state D1 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RESET START TD ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG38)) OR CAUSE_EQ_128] CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG38)) OR #CAUSE_EQ_128] CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG38)) OR #CAUSE_EQ_128] CANCEL +D_STATE_RES +D1_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>	L1	RST_SHT (LCI) RST_1 (LCI) CLR_1 (LCI) STRT_1DTEA	(P) (P) (P) F F	1
Extended Comments:				
1) no information, not allowed, too short				

STANDARDS.PDF.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/D1/IMPROPER/P07				
Identifier: P11_207				
Purpose: Verify the IUT Resets a too long Reset Confirmation packet (one octet appended) received in state D1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RESETC START TD ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG27 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG16 OR DIAG27 OR DIAG32 #OR DIAG39)) OR CAUSE_EQ_128] CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG16 OR DIAG27 OR DIAG32 #OR DIAG39)) OR CAUSE_EQ_128] CANCEL +D_STATE_RES +D1_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>	L1	RSTC_L(LCI) RST_1(LCI)	(P)	1
		CLR_1(LCI)	(P)	
		STRT_1DTEA	(P)	
			F	no response
			F	
Extended Comments:				
1) no information, not allowed, too long				

Test Case Dynamic Behaviour				
Reference: PACKET/D1/INOOPORTUNE/P01				
Identifier: P11_301				
Purpose: Verify the IUT resets a Reset Confirmation received in state D1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +D1_PVC_PREAMBLE !RESETC START TD ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG16 OR DIAG27)) OR CAUSE_EQ_128] CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG16 OR DIAG27)) OR #CAUSE_EQ_128] CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG16 OR DIAG27)) OR #CAUSE_EQ_128] CANCEL +D_STATE_RES +D1_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>	L1	<pre> RSTC_0 (LCI) RST_1 (LCI) CLR_1 (LCI) STRT_1DTEA </pre>	<pre> (P) 1 (P) (P) F F </pre>	<pre> no response </pre>
Extended Comments:				
1) no information, packet type invalid, invalid for d1				

Test Case Dynamic Behaviour				
Reference: PACKET/D1/INOPPORTUNE/P02				
Identifier: P11_302				
Purpose: Verify the IUT Resets an Incoming Call packet received on a PVC in state D1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+D1_PVC_PREAMBLE	L1	CALL_0 (LCI)	(P)	
!CALL START TD ?RESET CANCEL TD		RST_1 (LCI)		
+D2_POSTAMBLE				
?RESTART [RST_ON_ERR_R_PVC] CANCEL TD		STRT_1DTEA	(P)	
+D_STATE_RES				
+D1_UNEXPECTED GOTO L1				
+RSTRT_UNEXPECTED				
?TIMEOUT TD			F	1
?OTHERWISE CANCEL TD			F	
Extended Comments:				
1) no response				
This test case is only applicable to IUTs supporting PVCs.				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/D1/INOPPORTUNE/P03				
Identifier: P11_303				
Purpose: Verify the IUT Resets a Clear Indication received on a PVC in state D1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+D1_PVC_PREAMBLE !CLEAR START TD ?RESET CANCEL TD +D2_POSTAMBLE ?RESTART [RST_ON_ERR_R_PVC] CANCEL TD +D_STATE_RES +D1_UNEXPECTED GOTO L1 +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD	L1	CLR_0 (LCI) RST_1 (LCI) STRT_1DTEA	(P) (P) F F	1
Extended Comments:				
1) no response				
This test case is only applicable to IUTs supporting PVCs.				

Packet Layer Group 12: State D2 DTE Reset Request

PLG 12 contains the test cases for the Reset STATE d2, and does not include specific tests for optional facilities. This packet layer test group is applicable to IUTs supporting Permanent Virtual Circuit and/or Virtual Call services.

For IUTs supporting Clears or Restarts in response to errors, state D2 is not attainable.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/D2/PROPER/P01				
Identifier: P12_101				
Purpose: Verify the IUT changes to state D1 when a Reset Indication is received in state D2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE +D2_PREAMBLE !RESET START TD ?TIMEOUT TD +D1_POSTAMBLE +D1C_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD	L1	RST_0 (LCI)	(P) F	

Test Case Dynamic Behaviour				
Reference: PACKET/D2/PROPER/P02				
Identifier: P12_102				
Purpose: Verify the IUT is in state D1 after receiving a Reset Confirmation while in state D2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE +D2_PREAMBLE !RESETC CANCEL TD ?TIMEOUT TD +D1_POSTAMBLE +D1C_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD	L1	RSTC_0 (LCI)	(P) F	

Test Case Dynamic Behaviour				
Reference: PACKET/D2/IMPROPER/P01				
Identifier: P12_201				
Purpose: Verify the IUT discards a too short packet (two octets) received in state D2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE +D2_PREAMBLE !ERROR START TD ?TIMEOUT TD +D2_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		ERR_SHT (LCI)	(P) F	

Test Case Dynamic Behaviour				
Reference: PACKET/D2/IMPROPER/P02				
Identifier: P12_202				
Purpose: Verify the IUT discards an unidentifiable packet (PTI = '0D'H) received in state D2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE +D2_PREAMBLE !ERROR START TD ?TIMEOUT TD +D2_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		ERR_B (LCI)	(P) F	

Test Case Dynamic Behaviour				
Reference: PACKET/D2/IMPROPER/P03				
Identifier: P12_203				
Purpose: Verify the IUT discards a Restart with an assigned LCI not equal to zero received in state D2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE +D2_PREAMBLE !RESTART START TD ?TIMEOUT TD +D2_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		STRT_NZ (LCI)	(P)	
			F	

Test Case Dynamic Behaviour				
Reference: PACKET/D2/IMPROPER/P04				
Identifier: P12_204				
Purpose: Verify the IUT discards a Restart Confirmation with an assigned LCI not equal to zero received in state D2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE +D2_PREAMBLE !RESTARTC START TD ?TIMEOUT TD +D2_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		STRTC_NZ (LCI)	(P)	
			F	

Test Case Dynamic Behaviour				
Reference: PACKET/D2/IMPROPER/P05				
Identifier: P12_205				
Purpose: Verify the IUT Resets a too short Reset Indication received in state D2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE +D2_PREAMBLE !RESET START TD ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG38)) OR CAUSE_EQ_128] CANCEL +D2_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		RST_SHT (LCI) RST_1 (LCI)	(E) F F	1 no response
Extended Comments: 1) no information, not allowed, too short				

Test Case Dynamic Behaviour				
Reference: PACKET/D2/IMPROPER/P06				
Identifier: P12_206				
Purpose: Verify the IUT Resets a too long Reset Indication (one octet appended) received in state D2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE +D2_PREAMBLE !RESET START TD ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG39)) OR CAUSE_EQ_128] CANCEL +D2_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		RST_L (LCI) RST_1 (LCI)	(P) F F	1 no response
Extended Comments: 1) no information, not allowed, too long				

Test Case Dynamic Behaviour				
Reference: PACKET/D2/IMPROPER/P07				
Identifier: P12_207				
Purpose: Verify the IUT Resets long Reset Confirmation packet (one octet appended) received in state D2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE +D2_PREAMBLE !RESETC START TD ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG39)) OR CAUSE_EQ_128] CANCEL +D2_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		RSTC_L(LCI) RST_1(LCI)	(P)	1
			F F	2
Extended Comments: 1) no information, not allowed, too long 2) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/D2/INOOPORTUNE/P01				
Identifier: P12_301				
Purpose: Verify the IUT discards an Interrupt packet received in state D2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE +D2_PREAMBLE !INT START TD ?TIMEOUT TD +D2_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		INT_0(LCI)	(P)	1
			F	
Extended Comments: 1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/D2/ INOPPORTUNE/P02				
Identifier: P12_302				
Purpose: Verify the IUT discards an Interrupt Confirmation packet received in state D2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE +D2_PREAMBLE !INTC START TD ?TIMEOUT TD +D2_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		INTC_0 (LCI)	(P) F	1
Extended Comments: 1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/D2/ INOPPORTUNE/P03				
Identifier: P12_303				
Purpose: Verify the IUT discards a Data packet received in D2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE +D2_PREAMBLE !DATA START TD ?TIMEOUT TD +D2_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		D_ONE (LCI)	(P) F	1
Extended Comments: 1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/D2/ INOPPORTUNE/P04				
Identifier: P12_304				
Purpose: Verify the IUT discards an RR packet received in D2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE +D2_PREAMBLE !RR START TD ?TIMEOUT TD +D2_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		RR_0 (LCI)	(P)	1
Extended Comments: 1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/D2/ INOPPORTUNE/P05				
Identifier: P12_305				
Purpose: Verify the IUT discards an RNR packet received in D2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE +D2_PREAMBLE !RNR START TD ?TIMEOUT TD +D2_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		RNR_0 (LCI)	(P)	no response
Extended Comments: 1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/D2/INOOPORTUNE/P06				
Identifier: P12_306				
Purpose: Verify the IUT discards an Incoming Call packet received on a PVC in state D2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (PVC) +P4D1_PREAMBLE +D2_PREAMBLE !CALL START TD ?TIMEOUT TD +D2_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		CALL_0 (LCI)	(P) F	no response
Extended Comments: This test case is only applicable to IUTs supporting PVCs.				

Test Case Dynamic Behaviour				
Reference: PACKET/D2/INOOPORTUNE/P07				
Identifier: P12_307				
Purpose: Verify the IUT discards a Clear Indication packet received on a PVC in state D2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+D1_PVC_PREAMBLE +D2_PREAMBLE !CLEAR START TD ?TIMEOUT TD +D2_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD		CLR_0 (LCI)	(P) F	1
Extended Comments:				
1) no response				
This test case is only applicable to IUTs supporting PVCs.				

Packet Layer Group 13: State D3 DXE Reset Indication

PLG 13 contains the test cases for the Reset STATE d3, and does not include specific tests for optional facilities. STATE d3 is a transient state and may not be observable. This packet layer test group is applicable to IUTs supporting Permanent Virtual Circuit and/or Virtual Call services which implement the Packet Layer Protocol such that STATE d3 is observable.

For IUTs supporting Clears or Restarts in response to errors, state D3 is not attainable.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/D3/IMPROPER/P01				
Identifier: P13_201				
Purpose: Verify the IUT Resets a too short packet (two octets) received in state D3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RESET START TD_RESP ?TIMEOUT TD_RESP !ERROR START TD_RESP ?RESET [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG32 OR DIAG33 OR DIAG38)) OR #CAUSE_EQ_128] CANCEL +D2_POSTAMBLE +D1C_UNEXPECTED GOTO L2 ?TIMEOUT TD_RESP +D3_UNEXPECTED +D1C_UNEXPECTED GOTO L1 +D3_UNEXPECTED </pre>	<p>L1</p> <p>L2</p>	<p>RST_0 (LCI)</p> <p>ERR_SHT (LCI) RST_1 (LCI)</p>	<p>(P)</p> <p>F</p>	<p>1</p>
Extended Comments:				
1) no information, not allowed, too short				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour

Reference: PACKET/D3/IMPROPER/P02

Identifier: P13_202

Purpose: Verify the IUT Resets or Discards an unidentifiable packet (PTI field equals '0D'H) received in state D3

Default:

Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RESET START TD_RESP, START TO_D3, #START TD ?TIMEOUT TD_RESP	L1	RST_0 (LCI)		
!ERROR [ISO] START TD_RESP, CANCEL TO_D3, #CANCEL TD ?RESET [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG32 OR DIAG33 OR DIAG35)) OR #CAUSE_EQ_128] CANCEL	L2	RST_1 (LCI)	(P)	1, 2
+D1_POSTAMBLE +D1C_UNEXPECTED GOTO L2 ?TIMEOUT TD_RESP +D3_UNEXPECTED			F	
[CCITT_80 OR CCITT_84] ?TIMEOUT TO_D3 ?RESETC CANCEL	L3	RSTC_1 (LCI)	(P)	
+D1_POSTAMBLE ?RESET CANCEL		RST_1 (LCI)	(P)	
+D1_POSTAMBLE +D1C_UNEXPECTED GOTO L3 +D3_UNEXPECTED +D3_UNEXPECTED				

[7]

Continued on next page

Test Case Dynamic Behaviour				
Reference: PACKET/D3/IMPROPER/P04 Identifier: P13_204 Purpose: Verify the IUT Resets a Restart Confirmation on an assigned LCI not equal to zero received in state D3 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RESET START TD_RESP ?TIMEOUT TD_RESP !RESTARTC START TD_RESP ?RESET [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG32 OR DIAG41)) OR CAUSE_EQ_128] #CANCEL +D2_POSTAMBLE +D1C_UNEXPECTED GOTO L2 ?TIMEOUT TD_RESP +D3_UNEXPECTED +D1C_UNEXPECTED GOTO L1 +D3_UNEXPECTED	 L1 L2	 RST_0 (LCI) STRTC_NZ (LCI) RST_1 (LCI)	 (P) F	 1
Extended Comments : 1) no information, not allowed, non-zero lci				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/D3/IMPROPER/P05				
Identifier: P13_205				
Purpose: Verify the IUT Resets a too short Reset Indication (Cause field is NIL, Diagnostic field is NIL) received in state D3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RESET START TD_RESP ?TIMEOUT TD_RESP !RESET START TD_RESP ?RESET [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG32 OR DIAG38)) OR CAUSE_EQ_128] #CANCEL +D2_POSTAMBLE +D1C_UNEXPECTED GOTO L2 ?TIMEOUT TD_RESP +D3_UNEXPECTED +D1C_UNEXPECTED GOTO L1 +D3_UNEXPECTED </pre>	<p>L1</p> <p>L2</p>	<p>RST_0 (LCI)</p> <p>RST_SHT (LCI) RST_1 (LCI)</p>	<p>(P)</p> <p>F</p>	<p>1</p>
Extended Comments:				
1) no information, not allowed, too short				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/D3/IMPROPER/P06				
Identifier: P13_206				
Purpose: Verify the IUT Resets a too long Reset Indication (one octet appended) received in state D3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RESET START TD_RESP ?TIMEOUT TD_RESP	L1	RST_0 (LCI)		
!RESET START TD_RESP ?RESET [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG32 OR DIAG39)) OR CAUSE_EQ_128] #CANCEL	L2	RST_L (LCI) RST_1 (LCI)	(P)	1
+D2_POSTAMBLE				
+D1C_UNEXPECTED GOTO L2				
?TIMEOUT TD_RESP +D3_UNEXPECTED			F	
+D1C_UNEXPECTED GOTO L1				
+D3_UNEXPECTED				
Extended Comments:				
1) no information, not allowed, too long				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/D3/IMPROPER/P07				
Identifier: P13_207				
Purpose: Verify the IUT Resets a too long Reset Confirmation (one octet appended) received in state D3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RESET START TD_RESP ?TIMEOUT TD_RESP !RESETC START TD_RESP ?RESET [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG32 OR DIAG39)) OR CAUSE_EQ_128] #CANCEL +D2_POSTAMBLE +D1C_UNEXPECTED GOTO L2 ?TIMEOUT TD_RESP +D3_UNEXPECTED +D1C_UNEXPECTED GOTO L1 +D3_UNEXPECTED </pre>	<p>L1</p> <p>L2</p>	<p>RST_0 (LCI)</p> <p>RSTC_L (LCI) RST_1 (LCI)</p>	<p>(P)</p> <p>F</p>	<p>1</p>
Extended Comments:				
1) no information, not allowed, too long				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/D3/INOOPORTUNE/P01				
Identifier: P13_301				
Purpose: Verify the IUT discards a Reset Indication received in state D3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RESET START TD_RESP, START TO_D3, #START TD ?TIMEOUT TD_RESP	L1	RST_0 (LCI)		
!RESET ?TIMEOUT TO_D3 ?RESETC CANCEL	L2	RST_0 (LCI) RSTC_1 (LCI)	(P)	
+D1_POSTAMBLE +D1C_UNEXPECTED GOTO L2				
?TIMEOUT TD +D3_UNEXPECTED			F	
+D3_UNEXPECTED +D1C_UNEXPECTED GOTO L1				
+D3_UNEXPECTED				
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/D3/INOOPORTUNE/P02				
Identifier: P13_302				
Purpose: Verify the IUT Resets a Reset Confirmation received in state D3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RESET START TD_RESP ?TIMEOUT TD_RESP !RESETC START TD_RESP ?RESET [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG16 OR DIAG29)) OR CAUSE_EQ_128] #CANCEL +D2_POSTAMBLE +D1C_UNEXPECTED GOTO L2 ?TIMEOUT TD_RESP +D3_UNEXPECTED +D1C_UNEXPECTED GOTO L1 +D3_UNEXPECTED </pre>	<p>L1</p> <p>L2</p>	<p>RST_0 (LCI)</p> <p>RSTC_0 (LCI) RST_1 (LCI)</p>	<p>(P)</p> <p>F</p>	<p>1</p>
Extended Comments:				
1) no information, packet invalid, invalid for D3				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/D3/INOOPORTUNE/P03				
Identifier: P13_303				
Purpose: Verify the IUT Resets an Interrupt packet received in state D3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RESET START TD_RESP ?TIMEOUT TD_RESP	L1	RST_0 (LCI)		
!INT START TD_RESP ?RESET [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG16 OR DIAG29)) OR CAUSE_EQ_128] #CANCEL	L2	INT_1 (LCI) RST_1 (LCI)	(P)	1
+D2_POSTAMBLE				
+D1C_UNEXPECTED GOTO L2				
?TIMEOUT TD_RESP +D3_UNEXPECTED			F	
+D1C_UNEXPECTED GOTO L1				
+D3_UNEXPECTED				
Extended Comments:				
1) no information, packet type invalid, invalid for D3				

STANDARDSISO.COM Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/D3/INOOPORTUNE/P04				
Identifier: P13_304				
Purpose: Verify the IUT Resets an Interrupt Confirmation received in state D3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RESET START TD_RESP ?TIMEOUT TD_RESP !INTC START TD_RESP ?RESET [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG16 OR DIAG29)) OR CAUSE_EQ_128] #CANCEL +D2_POSTAMBLE +D1C_UNEXPECTED GOTO L2 ?TIMEOUT TD_RESP +D3_UNEXPECTED +D1C_UNEXPECTED GOTO L1 +D3_UNEXPECTED </pre>	<p>L1</p> <p>L2</p>	<p>RST_0 (LCI)</p> <p>INTC_0 (LCI) RST_1 (LCI)</p>	<p>(P)</p> <p>F</p>	<p>1</p>
Extended Comments:				
1) no information, packet.type invalid, invalid for D3				

STANDARDSISO.COM - Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/D3/INOPPORTUNE/P08				
Identifier: P13_308				
Purpose: Verify the IUT Resets an Incoming Call packet received on a PVC in state D3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +D1_PVC_PREAMBLE !RESET START TD_RESP ?TIMEOUT TD_RESP !CALL START TD_RESP ?RESET [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG16 OR DIAG29 OR DIAG32 OR DIAG35)) #OR CAUSE_EQ_128] CANCEL +D2_POSTAMBLE ?RESTART [RST_ON_ERR_R_PVC] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG16 OR #DIAG29)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE +D1C_UNEXPECTED GOTO L2 ?TIMEOUT TD_RESP +D3_UNEXPECTED +D1C_UNEXPECTED GOTO L1 +D3_UNEXPECTED </pre>	<p>L1</p> <p>L2</p>	<p>RST_0 (LCI)</p> <p>CALL_0 (LCI) RST_1 (LCI)</p> <p>STRT_1DTEA</p>	<p>(P)</p> <p>(P)</p> <p>F</p>	<p>1</p>
Extended Comments:				
1) no information, packet type invalid, invalid for D3				

STANDARD.SISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/D3/INOOPPORTUNE/P09				
Identifier: P13_309				
Purpose: Verify the IUT Resets a Clear Indication received on a PVC in state D3				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +D1_PVC_PREAMBLE !RESET START TD_RESP ?TIMEOUT TD_RESP !RNR START TD_RESP ?RESET [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG16 OR DIAG29 OR DIAG32 OR DIAG35)) #OR CAUSE_EQ_128] CANCEL +D2_POSTAMBLE ?RESTART [RST_ON_ERR_R_PVC] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG16 OR #DIAG29)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE +D1C_UNEXPECTED GOTO L2 ?TIMEOUT TD_RESP +D3_UNEXPECTED +D1C_UNEXPECTED GOTO L1 +D3_UNEXPECTED </pre>	<p>L1</p> <p>L2</p>	<p>RST_0 (LCI)</p> <p>RNR_0 (LCI) RST_1 (LCI)</p> <p>STR1_1DTEA</p>	<p>(P)</p> <p>(P)</p> <p>F</p>	<p>1</p>
Extended Comments:				
1) no information, packet type invalid, invalid for D3				

STANDARDS160.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Packet Layer Group 14: State I1 DTE Interrupt Ready

PLG 14 contains the test cases for the Interrupt STATE i1. This packet layer test group is applicable to IUTs supporting Permanent Virtual Circuit and/or Virtual Call services.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/I1/IMPROPER/P01				
Identifier: P14_201				
Purpose: Verify the IUT Resets a too long Interrupt Confirmation (one octet appended) packet received in state I1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !INTC START TD ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG39 OR DIAG43)) OR #CAUSE_EQ_128] CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG39 OR DIAG43)) #OR CAUSE_EQ_128] CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG39 OR DIAG43)) #OR CAUSE_EQ_128] CANCEL +D_STATE_RES +D1_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>	L1	<pre> INTC_L(LCI) RST_1(LCI) CLR_1(LCI) STRT_1DTEA </pre>	<pre> (P) (P) (P) F F </pre>	1
Extended Comments:				
1) no information, not allowed, too long, unauthorized Interrupt Confirmation				

Test Case Dynamic Behaviour				
Reference: PACKET/I1/INOPPORTUNE/P01				
Identifier: P14_301				
Purpose: Verify the IUT Resets an Interrupt Confirmation received in state I1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !INTC START TD ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG43)) OR CAUSE_EQ_128] CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG43)) OR #CAUSE_EQ_128] CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG43)) OR #CAUSE_EQ_128] CANCEL +D_STATE_RES +D1_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>	L1	INTC_0(LCI) RST_1(LCI)	(P)	1
		CLR_1(LCI)	(P)	
		STRT_1DTEA	(P)	
			F	
			F	
Extended Comments:				
1) no information, not allowed, unauthorized Interrupt Confirmation				

STANDARD.SISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Packet Layer Group 15: State I2 DTE Interrupt Sent

PLG 15 contains the test cases for the Interrupt STATE i2. This packet layer test group is applicable to IUTs supporting Permanent Virtual Circuit and/or Virtual Call services.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/I2/PROPER/P01				
Identifier: P15_101				
Purpose: Verify the IUT moves from state I2 to I1 when an Interrupt Confirmation is received in state I2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC)				
+P4D1_PREAMBLE				
<IUT!INT>		INT_1 (LCI)		
START TD				
?INT CANCEL TD	L1	INT_1 (LCI)		
!INTC START TD		INTC_0 (LCI)		
?TIMEOUT TD	L2		(P)	
+D1_POSTAMBLE				
+D1B_UNEXPECTED				
GOTO L2				
+RSTRT_UNEXPECTED				
?OTHERWISE CANCEL TD			F	
+D1B_UNEXPECTED				
GOTO L1				
+CLR_UNEXPECTED				
+RSTRT_UNEXPECTED				
?TIMEOUT TD			F	
?OTHERWISE CANCEL TD			F	
Extended Comments :				

STANDARDSISO.COM Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/I2/IMPROPER/P01				
Identifier: P15_201				
Purpose: Verify the IUT Resets a too long Interrupt Confirmation packet received in state I2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE <IUT!INT> START TD ?INT CANCEL TD !INTC START TD ?RESET [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG39 OR DIAG43)) OR CAUSE_EQ_128] #CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG39 OR #DIAG43)) OR CAUSE_EQ_128] CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG39 OR #DIAG43)) OR CAUSE_EQ_128] CANCEL +D_STATE_RES +D1B_UNEXPECTED GOTO L2 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD +D1B_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED </pre>	<p>L1</p> <p>L2</p>	<p>INT_1 (LCI)</p> <p>INT_1 (LCI)</p> <p>INTC_L (LCI) RST_1 (LCI)</p> <p>CLR_1 (LCI)</p> <p>STRT_1DTEA</p>	<p>(P)</p> <p>(P)</p> <p>(P)</p> <p>F</p> <p>F</p>	<p>1</p> <p>no response</p>

[5]

Continued on next page

..... Continued from previous page.

[5]

Behaviour Description	Label	Constraints Reference	V	Comments
?TIMEOUT TD			F	
?OTHERWISE CANCEL TD			F	
Extended Comments:				
1) no information, packet too long, unauthorized Interrupt Confirmation				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Packet Layer Group 16: State J1 DXE Interrupt Ready

PLG 16 contains the test cases for the Interrupt STATE j1. This packet layer test group is applicable to IUTs supporting Permanent Virtual Circuit and/or Virtual Call services.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/J1/PROPER/P01				
Identifier: P16_101				
Purpose: Verify the IUT confirms an Interrupt received in state J1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE				
!INT START TD ?INTC CANCEL TD	L1	INT_0 (LCI) INTC_1 (LCI)	(P)	
+D1_POSTAMBLE				
+D1_UNEXPECTED GOTO L1				
+RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD			F F	no response
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/J1/ IMPROPER/P01				
Identifier: P16_201				
Purpose: Verify the IUT Resets a too short Interrupt packet in state J1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !INT START TD ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG38 OR DIAG44)) OR #CAUSE_EQ_128] CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG38 OR DIAG44) #) OR CAUSE_EQ_128] CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG38 OR DIAG44) #) OR CAUSE_EQ_128] CANCEL +D_STATE_RES +D1_UNEXPECTED GOTO L1 +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>	L1	<pre> INT_SHT (LCI) RST_1 (LCI) CLR_1 (LCI) STRT_1DTEA </pre>	<p>(P)</p> <p>(P)</p> <p>(P)</p> <p>F</p> <p>F</p>	<p>1</p> <p>no response</p>
Extended Comments:				
1) no information, not allowed, too short, unauthorized Interrupt				

STANDARD.SISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Packet Layer Group 17: State J2 DXE Interrupt Sent

PLG 17 contains the test cases for the Interrupt STATE j2. STATE j2 is a transient state and may not be observable. This packet layer test group is applicable only if the IUT implements the Packet Layer Protocol such that STATE j2 is observable. PLG 17 is applicable to IUTs supporting Permanent Virtual Circuits and/or Virtual Call services.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/J2/IMPROPER/P01				
Identifier: P17_201				
Purpose: Verify the IUT Resets a too short Interrupt received in state J2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !INT START TD_RESP ?TIMEOUT TD_RESP !INT START TD_RESP ?RESET [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG32 OR DIAG38 OR DIAG44)) OR #CAUSE_EQ_128] CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR DIAG38 #OR DIAG44)) OR CAUSE_EQ_128] CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR DIAG38 #OR DIAG44)) OR CAUSE_EQ_128] CANCEL +D_STATE_RES +D1_UNEXPECTED GOTO L1 ?TIMEOUT TD_RESP +J2_UNEXPECTED +J2_UNEXPECTED </pre>	L1	<pre> INT_1 (LCI) INT_SHT (LCI) RST_1 (LCI) CLR_1 (LCI) STRT_1DTEA </pre>	(P)	1
Extended Comments:				
1) no information, not allowed, too short, unauthorized Interrupt				

Test Case Dynamic Behaviour				
Reference: PACKET/J2/IMPROPER/P02				
Identifier: P17_202				
Purpose: Verify the IUT Resets a too long Interrupt packet (1 or 32 octets appended) received in state J2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !INT START TD_RESP ?TIMEOUT TD_RESP !INT [CCITT_80] START TD_RESP +SUBTREE !INT [CCITT_84 OR ISO] START #TD_RESP +SUBTREE +J2_UNEXPECTED SUBTREE ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 #OR DIAG39 OR DIAG44)) OR CAUSE_EQ_128] #CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG32 OR DIAG39 OR DIAG44)) OR #CAUSE_EQ_128] CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG32 OR DIAG39 OR DIAG44)) OR #CAUSE_EQ_128] CANCEL +D_STATE_RES +D1_UNEXPECTED GOTO L1 ?TIMEOUT TD_RESP +J2_UNEXPECTED </pre>	L1	INT_0 (LCI) INT_L1 (LCI) INT_L32 (LCI) RST_1 (LCI) CLR_1 (LCI) STRT_1DTEA	(P)	1
			F	
Extended Comments :				
1) no information, not allowed, too short, unauthorized Interrupt				

Test Case Dynamic Behaviour				
Reference: PACKET/J2/INOPPORTUNE/P01				
Identifier: P17_301				
Purpose: Verify the IUT Resets an Interrupt packet received in state J2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !INT START TD_RESP ?TIMEOUT TD_RESP !INT START TD_RESP ?RESET [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG32 OR DIAG44)) OR CAUSE_EQ_128] #CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR #DIAG44)) OR CAUSE_EQ_128] CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR #DIAG44)) OR CAUSE_EQ_128] CANCEL +D_STATE_RES +D1_UNEXPECTED GOTO L1 ?TIMEOUT TD_RESP +J2_UNEXPECTED +J2_UNEXPECTED </pre>	L1	<p>INT_1 (LCI)</p> <p>INT_1 (LCI) RST_1 (LCI)</p> <p>CLR_1 (LCI)</p> <p>STRT_1DTEA</p>	<p>(P)</p> <p>(P)</p> <p>F</p>	1
Extended Comments:				
1) no information, not allowed, unauthorized Interrupt				

Packet Layer Group 18: State F1 DXE Receive Ready

PLG 18 contains the test cases for the Flow Control STATE f1. STATE f1 is applicable only if the IUT supports the receipt of DATA packets. PLG 18 is applicable to IUTs supporting Permanent Virtual Circuits and/or Virtual Call services.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/F1/PROPER/P01				
Identifier: P18_101				
Purpose: Verify the IUT will accept a window of DATA packets received in state F1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE REPEAT EXCH_DAT (COUNT) UNTIL [COUNT = #DEF_WIN_SZ] [COUNT = DEF_WIN_SZ] +D1_POSTAMBLE			(P)	1
Extended Comments: 1) send a window full of Data packets to the IUT				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/F1/PROPER/P02				
Identifier: P18_102				
Purpose: Verify the IUT accepts an RNR packet after receiving a window of Data packets in state F1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE REPEAT EXCH_DAT (COUNT) UNTIL [COUNT = #DEF_WIN_SZ] !RNR (RNR.PR := PR) START TD ?TIMEOUT TD !RR (RR.PR := PR) +D1_POSTAMBLE ?DATA CANCEL TD +D1C_UNEXPECTED GOTO L1 +RSET_UNEXPECTED +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD </pre>	L1	RNR_A (LCI) RR_A (LCI) DAT_1 (LCI)	(P) F F	1
Extended Comments:				
1) send a window full of Data packets to the IUT				

Test Case Dynamic Behaviour				
Reference: PACKET/F1/IMPROPER/P01				
Identifier: P18_201				
Purpose: Verify the IUT Resets or discards a too long RR packet (one octet appended) received in state F1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RR START TD ?TIMEOUT TD +D1_POSTAMBLE ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG39)) OR CAUSE_EQ_128] CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL +D_STATE_RES +D1C_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD	L1	RR_L(LCI)	(P)	no response
		RST_1(LCI)	(P)	
		CLR_1(LCI)	(P)	1
		STRT_1DTEA	(P)	
			F	
Extended Comments:				
1) no information, not allowed, too long				

Test Case Dynamic Behaviour				
Reference: PACKET/F1/IMPROPER/P02				
Identifier: P18_202				
Purpose: Verify the IUT Resets or discards too long RNR packet received in state F1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RNR START TD ?TIMEOUT TD +D1_POSTAMBLE ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG39)) OR CAUSE_EQ_128] CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL +D_STATE_RES +D1C_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE_CANCEL TD </pre>	L1	RNR_L(LCI)	(P)	no response
		RST_1(LCI)	(P)	
		CLR_1(LCI)	(P)	1
		STRT_1DTEA	(P)	
			F	
Extended Comments:				
1) no information, not allowed, too long				

Test Case Dynamic Behaviour				
Reference: PACKET/F1/INOPPORTUNE/P01				
Identifier: P18_301				
Purpose: Verify the IUT Resets an RR with an invalid P(R) received in state F1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RR START TD ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG2)) OR CAUSE_EQ_128] CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG2)) OR CAUSE_EQ_128] #CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG2)) AND CAUSE_EQ_128] #CANCEL +D_STATE_RES +D1C_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>	L1	RR_7(LCI) RST_1(LCI)	(P)	1
		CLR_1(LCI)	(P)	2
		STRT_1DTEA	(P)	
			F F	3
Extended Comments: 1) p(r) = 7 2) no information, invalid p(r) 3) no response				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/F1/INOOPORTUNE/P02				
Identifier: P18_302				
Purpose: Verify the IUT Resets an RNR with invalid P(R) received in state F1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RNR START TD ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG2)) OR CAUSE_EQ_128] CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG2)) OR CAUSE_EQ_128] #CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG2)) OR CAUSE_EQ_128] #CANCEL +D_STATE_RES +D1C_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>	L1	RNR_7(LCI) RST_1(LCI)	(P)	1
		CLR_1(LCI)	(P)	2
		STRT_1DTEA	(P)	
			F F	3
Extended Comments:				
<ol style="list-style-type: none"> 1) p(r) = 7 2) no information, invalid p(r) 3) no response 				

Packet Layer Group 19: State F2 DXE Receive Not Ready

PLG 19 contains the test cases for the Flow Control STATE f2. STATE f2 is applicable only if the IUT supports the transmission of DATA packets. PLG 19 is applicable to IUTs supporting Permanent Virtual Circuit and/or Virtual Call services.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/F2/PROPER/P01				
Identifier: P19_101				
Purpose: Verify the IUT accepts a RR packet received in state F2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RNR START TD ?TIMEOUT TD	L1	RNR_0 (LCI)		
!RR START TD ?TIMEOUT TD	L2	RR_0 (LCI)	(P)	
+D1_POSTAMBLE				
+D1C_UNEXPECTED GOTO L2				
+CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD			F	
+D1C_UNEXPECTED GOTO L1				
+CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL			F	
Extended Comments :				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/F2/IMPROPER/P01				
Identifier: P19_201				
Purpose: Verify the IUT Resets or discards a too long RR packet (one octet appended) received in state F2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RNR START TD ?TIMEOUT TD !RR START TD ?TIMEOUT TD +D1_POSTAMBLE ?RESET [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG32 OR DIAG39)) OR CAUSE_EQ_128] #CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [# (CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR #DIAG39)) OR CAUSE_EQ_128] CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [# (CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR #DIAG39)) OR CAUSE_EQ_128] CANCEL +D_STATE_RES +D1C_UNEXPECTED GOTO L2 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD +D1C_UNEXPECTED GOTO L1	L1	RNR_0 (LCI)		
	L2	RR_L (LCI)	(P)	2
		RST_1 (LCI)	(P)	1
		CLR_1 (LCI)	(P)	
		STRT_1DTEA	(P)	
			F	

[5]

Continued on next page

..... Continued from previous page.
 [4]

Behaviour Description	Label	Constraints Reference	V	Comments
+CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD			F	
Extended Comments: 1) no information, not allowed, too long 2) no response				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/F2/IMPROPER/P02				
Identifier: P19_202				
Purpose: Verify the IUT Resets or discards a too long RNR packet (one octet appended) received in state F2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RNR START TD ?TIMEOUT TD !RNR START TD ?TIMEOUT TD +D1_POSTAMBLE ?RESET [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG32 OR DIAG39)) OR CAUSE_EQ_128] #CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [# (CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR #DIAG39)) OR CAUSE_EQ_128] CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [# (CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR #DIAG39)) OR CAUSE_EQ_128] CANCEL +D_STATE_RES +D1C_UNEXPECTED GOTO L2 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD +D1C_UNEXPECTED GOTO L1	L1	RNR_0 (LCI)		
	L2	RNR_L (LCI)	(P)	2
		RST_1 (LCI)	(P)	1
		CLR_1 (LCI)	(P)	1
		STRT_1DTEA	(P)	
			F	

[5]

Continued on next page

..... Continued from previous page.
 [4]

Behaviour Description	Label	Constraints Reference	V	Comments
+CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD			F	
Extended Comments : 1) no information, not allowed, too long 2) no response				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/F2/INOOPORTUNE/P01				
Identifier: P19_301				
Purpose: Verify the IUT Resets an RR with an invalid P (R) received in state F2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RNR START TD ?TIMEOUT TD !RR START TD ?RESET [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG2)) OR CAUSE_EQ_128] CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG2)) OR #CAUSE_EQ_128] CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG2)) OR #CAUSE_EQ_128] CANCEL +D_STATE_RES +D1C_UNEXPECTED GOTO L2 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD +D1C_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD </pre>	<p>L1</p> <p>L2</p>	<p>RNR_0 (LCI)</p> <p>RR_7 (LCI) RST_1 (LCI)</p> <p>CLR_1 (LCI)</p> <p>STRT_1DTEA</p>	<p>(P)</p> <p>(P)</p> <p>(P)</p> <p>F F</p> <p>F</p>	<p>p(r) = 7</p> <p>2</p> <p>1</p>
Extended Comments:				
<p>1) no response</p> <p>2) p(r) invalid</p>				

Test Case Dynamic Behaviour				
Reference: PACKET/F2/INOOPORTUNE/P02				
Identifier: P19_302				
Purpose: Verify the IUT Resets an RNR with an invalid P(R) received in state F2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !RNR START TD ?TIMEOUT TD	L1	RNR_0 (LCI)		
!RNR START TD ?RESET [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG2)) OR CAUSE_EQ_128] CANCEL	L2	RNR_7 (LCI) RST_1 (LCI)	(P)	p(r) = 7
+D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG2)) OR #CAUSE_EQ_128] CANCEL		CLR_1 (LCI)	(P)	2
+D_STATE_CLR ?RESTART [RST_ON_ERR_R] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG2)) OR #CAUSE_EQ_128] CANCEL		STRT_1DTEA	(P)	
+D_STATE_RES +D1C_UNEXPECTED GOTO L2				
+CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD			F F	1
+D1C_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD			F	
Extended Comments:				
1) no response				
2) p(r) invalid				

Packet Layer Group 20: State G1 DTE Receive Ready

PLG 20 contains the test cases for the Flow Control STATE g1. STATE g1 is applicable only if the IUT supports the transmission of and receipt of DATA packets. PLG 20 is applicable to IUTs supporting Permanent Virtual Circuit and/or Virtual Call services.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/G1/PROPER/P01				
Identifier: P20_101				
Purpose: Verify the IUT is capable of receiving both values of the Q-bit received in state G1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE REPEAT EXCH_DAT_QBIT_A (COUNT) UNTIL #[COUNT > 8] [COUNT > 8] +D1_POSTAMBLE			(P)	
Extended Comments:				
NOTE see PIXIT question 2.15				

Test Case Dynamic Behaviour				
Reference: PACKET/G1/PROPER/P02				
Identifier: P20_102				
Purpose: Verify the IUT can accept a Data packet with no user data received in state G1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE REPEAT EXCH_DAT_EMPTY (COUNT) UNTIL #[COUNT > 8] !DATA # +RX_DATA +D1_POSTAMBLE		D_EMPTY (LCI, PS, PR)	(P)	
Extended Comments:				
NOTE see PIXIT question 2.16				

Test Case Dynamic Behaviour				
Reference: PACKET/G1/IMPROPER/P03				
Identifier: P20_203				
Purpose: Verify the IUT discards, Reject or Resets a too long Data packet with the M-bit set, received in state G1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !DATA START TD ?TIMEOUT TD [CCITT_80 OR CCITT_84] [ISO] +D1_POSTAMBLE ?REJ [REJ_SUPP] CANCEL TD !DATA +D1_POSTAMBLE ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG39)) OR CAUSE_EQ_128] CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG39)) OR #CAUSE_EQ_128] CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_F] [# (CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR #DIAG39)) OR CAUSE_EQ_128] CANCEL +D_STATE_RES +D1_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD	L1	D_ML (LCI) REJ_1A (LCI) D_ONE (LCI) RST_1 (LCI) CLR_1 (LCI) STRT_1DTEA	F (P) (P) (P) (P) (P) F	1
Extended Comments:				
1) no information, not allowed, too long				

Test Case Dynamic Behaviour				
Reference: PACKET/G1/INOPPORTUNE/P01				
Identifier: P20_301				
Purpose: Verify the IUT Resets a Data packet with bad P(R) received in state G1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !DATA START TD ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG2)) OR CAUSE_EQ_128] CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG2)) OR CAUSE_EQ_128] #CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG2)) OR CAUSE_EQ_128] #CANCEL +D_STATE_RES +D1C_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>	L1	<p>D_PR7(LCI) RST_1(LCI)</p> <p>CLR_1(LCI)</p> <p>STRT_1DTEA</p>	<p>(P)</p> <p>(P)</p> <p>(P)</p> <p>F</p> <p>F</p>	<p>1</p> <p>2</p> <p>no response</p>
Extended Comments				
<p>1) p(r)=7 p(s)=0</p> <p>2) no information, invalid p(r)</p>				

Test Case Dynamic Behaviour				
Reference: PACKET/G1/INOPPORTUNE/P02				
Identifier: P20_302				
Purpose: Verify the IUT Resets, Rejects, or discards a Data packet with bad P(S) received in state G1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !DATA START TD ?TIMEOUT TD [CCITT_80 OR CCITT_84] +D1_POSTAMBLE [ISO] ?REJ [REJ_SUPP] CANCEL TD !DATA +D1_POSTAMBLE ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG1)) OR CAUSE_EQ_128] CANCEL !RESETC +D1_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG1)) OR CAUSE_EQ_128] #CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG1)) OR CAUSE_EQ_128] #CANCEL +D_STATE_RES +D1C_UNEXPECTED GOTO L1 +CLR_UNEXPECTED	L1	D_PS7 (LCI) REJ_1 (LCI) D_ONE (LCI) RST_1 (LCI) RSTC_0 (LCI) CLR_1 (LCI) STRT_1DTEA	(P) (P) (P) (P)	no response 1 2

[4]

Continued on next page

..... Continued from previous page.

[4]

Behaviour Description	Label	Constraints Reference	V	Comments
+RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD			F	
Extended Comments: 1) see ISO 8208 clause 11.3b 2) no information, invalid p(r)				

Test Case Dynamic Behaviour				
Reference: PACKET/G1/ INOPPORTUNE/P08 Identifier: P20_308 Purpose: Verify the IUT Resets a Data packet with D-bit set, when Delivery Confirmation is not used in state G1 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE_A !DATA START TD ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG160 OR DIAG166)) OR CAUSE_EQ_128] #CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [-(CAUSE_EQ_0 #AND (DIAG0 OR DIAG160 OR DIAG166)) OR #CAUSE_EQ_128] CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0)) OR CAUSE_EQ_128] CANCEL +D_STATE_RES +D1_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD	L1	D_DBIT (LCI) RST_1 (LCI)	(P)	1
		CLR_1 (LCI)	(P)	1
		STRT_1DTEA	(P)	
			F F	
Extended Comments: 1) no information, DTE-Specific Signals, D-bit procedure not supported NOTE: only valid if the IUT supports Delivery Confirmation negotiation				

Packet Layer Group 21: State G2 DTE Receive Not Ready

No tests are possible because the establishment and removal of the busy condition cannot be controlled.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

**Packet Layer Group 22:
Window Filling and Rotation, Remote Busy, M-bit Tests**

PLG 22 contains DATA TRANSFER test cases. PLG 22 is applicable to IUTs supporting Permanent Virtual Circuits and/or Virtual Call services. This packet layer test group is applicable to IUTs which are able to send and receive DATA packets or send only IUTs. Window Filling and Remote Busy tests for those IUTs which are unable to send DATA packets (receive-only IUTs) are included in PLG 18 and PLG 19. There is no Valid M-bit test for IUTs which are unable to receive DATA packets (send only IUTs).

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/WINDOW/PROPER/P01				
Identifier: P22_101				
Purpose: Verify the IUT can transmit a full window of Data packets and observe the maximum window size				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE				
REPEAT EXCH_DAT_NOACK (COUNT) UNTIL #[COUNT = DEF_WIN_SZ]				
<IUT!DATA> START TD		DAT_1 (LCI)		1
?TIMEOUT TD	L1			2
!RR (RR.PR:=PR) START TD		RR_A (LCI)		open window
##(2*TD_RESPONSE)				
?DATA PR_VERIFY PR_UPDATE	L2	DAT_1A (LCI, PR)	(P)	
##PT_UPDATE1				
+D1_POSTAMBLE				
?RR PT_UPDATE2 GOTO L2		RR_1 (LCI)		
+RX_INTERRUPT !INTC GOTO L2		INTC_0 (LCI)		
?RNR PT_UPDATE3 CANCEL		RNR_1 (LCI)	I	
?REJ [REJ_SUPP] PT_UPDATE4		REJ_1A (LCI)	I	
##CANCEL				
+RSET_UNEXPECTED +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD			F	4
?OTHERWISE CANCEL			F	
?DATA CANCEL		DAT_1A (LCI, PR)	F	3
##				
+D1C_UNEXPECTED				

[7]

Continued on next page

..... Continued from previous page.

[6]

Behaviour Description	Label	Constraints Reference	V	Comments
GOTO L1 +RSET_UNEXPECTED +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD			F	
Extended Comments : 1) Request the IUT to send a Data packet when its transmit window is closed. 2) receiver queues data from implicit send above. 3) received a data packet outside the window when the window was closed 4) the IUT did not send the requested Data packet after the Testers receive window was opened NOTE: the Tester and IUT will use the same window size derived from PIXIT 1.9a				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/WINDOW/PROPER/P02				
Identifier: P22_102				
Purpose: Verify the IUT will not send Data packets when the receiver (Tester) is in the Busy condition (RNR)				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE REPEAT EXCH_DAT (COUNT) UNTIL [COUNT = #DEF_WIN_SZ] !RNR (RNR.PR:=PR) <IUT!DATA> START TD ?DATA ?TIMEOUT TD !RR (RR.PR:= PR) +RX_DATA +D1_POSTAMBLE +D1C_UNEXPECTED GOTO L1 +RSET_UNEXPECTED +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD </pre>	L1	<pre> RNR_0 (LCI) DAT_1 (LCI) DAT_1 (LCI) RR_0 (LCI) </pre>	<pre> F (P) F </pre>	<pre> 3 1 iut in dl 2 </pre>
Extended Comments:				
<p>1) after the RNR has been sent to the IUT, attempt to send a Data packet from the IUT to the Tester. The IUT should not transmit the Data packet because it is in the Remote Busy state.</p> <p>2) after the busy condition is removed the queued Data packet should be sent to the Tester</p> <p>3) put IUT in the remote busy state.</p> <p>NOTE: the Tester and IUT will use the same window size derived from PIXIT 1.9a</p>				

Test Case Dynamic Behaviour				
Reference: PACKET/WINDOW/PROPER/P05				
Identifier: P22_105				
Purpose: Verify the IUT properly processes the sequence number modulo				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE REPEAT EXCH_DAT (COUNT) UNTIL [COUNT = #(SEQ_MODULO + 3)] [PR = COUNT MOD SEQ_MODULO] +D1_POSTAMBLE [PR <> COUNT MOD SEQ_MODULO]				1 2
Extended Comments :				
1) exchange SEQ_MODULO of Data packets + 3				
2) check that a full window of Data packets has been received from the IUT, the Tester's P(R) value is the total number of Data packets transmitted to the Tester modulo the Sequence Modulo (8 or 128)				
NOTE: the Tester and IUT will use the same window size derived from PIXIT 1.9a				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/WINDOW/PROPER/P06				
Identifier: P22_106				
Purpose: Verify the IUT supports Data packets with the M-bit set.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE REPEAT EXCH_DAT_MBIT (COUNT) UNTIL # [COUNT >= 9] [PR = (COUNT MOD SEQ_MODULO)] +D1_POSTAMBLE [PR <> (COUNT MOD SEQ_MODULO)]				1 2
Extended Comments : 1) send all the packets specified in PIXIT 2.15 2) verify the IUT has acknowledged all the transmitted packets NOTE: see PIXIT 2.15 question for user supplied Data packets.				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/WINDOW/IMPROPER/P02				
Identifier: P22_202				
Purpose: Verify the IUT Resets a Data packet with an M-bit violation received in state D1				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE(ANY_VC) +P4D1_PREAMBLE !DATA START TD ?RESET [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG160 OR DIAG165)) OR CAUSE_EQ_128] #CANCEL TD !RESETC +D1_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0)) OR CAUSE_EQ_128] CANCEL TD +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [(CAUSE_EQ_0 #AND (DIAG0)) OR CAUSE_EQ_128] CANCEL TD +D_STATE_RES +D1C_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>	L1	D_M4(LCI) RST_1(LCI)		< full
		RSTC_0(LCI)	(P)	
		CLR_1(LCI)	(P)	no info
		STRT_1DTEA	(P)	
			F	
			F	
Extended Comments:				
NOTE: This test case is only applicable to ISO 8208 IUTs.				
NOTE: see PIXIT question 2.16.				

Test Case Dynamic Behaviour				
Reference: PACKET/WINDOW/IMPROPER/P03				
Identifier: P22_203				
Purpose: Verify the IUT resets a Data packet with a changing Q bit				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE +EXCH_DAT_QBIT (COUNT) [COUNT <= 8] START TD ?RESET [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG80 OR DIAG83)) OR CAUSE_EQ_128] #CANCEL +D2_POSTAMBLE +D1C_UNEXPECTED GOTO L1 ?CLEAR [CLR_ON_ERR_R] [#(CAUSE_EQ_0 AND (DIAG0)) OR CAUSE_EQ_128] #CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [#(CAUSE_EQ_0 AND (DIAG0)) OR CAUSE_EQ_128] #CANCEL +D_STATE_RES +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD GOTO L2 ?OTHERWISE CANCEL TD [COUNT > 8] </pre>	<p>L2</p> <p>L1</p>	<p>RST_1 (LCI)</p> <p>CLR_1 (LCI)</p> <p>STRT_1DTEA</p>	<p>(P)</p> <p>(P)</p> <p>(P)</p> <p>F</p> <p>F</p>	<p>continue</p> <p>1</p>
Extended Comments:				
<p>1) If the tester has not received a Reset, Clear or Restart after the transmission of nine data packets as specified in PIXIT 2.12 the Fail verdict is assigned</p>				

Packet Layer Group 23: Timer Tests

PLG 23 contains the test cases that verify the functions of the IUT Time-Outs. The tests that verify T25, T27, and T28 are not required when their associated optional procedures are not used. PLG 23 is applicable to IUTs supporting Permanent Virtual Circuit and/or Virtual Call services.

There is no test for timer T24 because an IUT is permitted to transmit RR, RNR, Data and REJECT packets at any time while T24 is running. These packets cause the IUT to restart time T24. Thus there is no assurance that T24 will expire.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/TIMER/PROPER/P01				
Identifier: P23_101				
Purpose: Verify T20 timer operation				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) +R2_PREAMBLE START TT20 (T20 - TDELTA) ?TIMEOUT TT20 START TDEL (TDELTA * 2) ?RESTART [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG16 OR DIAG17 OR DIAG48 OR DIAG52)) #OR CAUSE_EQ_128] CANCEL TDEL +GEN2_POSTAMBLE ?TIMEOUT TDEL [CCITT_80 OR CCITT_84] +GEN2_POSTAMBLE [ISO] ?OTHERWISE CANCEL TDEL +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TT20		STRT_1DTEA	(P)	1
				2
			(P)	
			F	
			F	
			F	
Extended Comments :				
1) no information, invalid packet type, invalid for state r1, timer expired, timer expired or retransmission count surpassed for Restart Request				
2) for CCITT X.25 1980 and 1984 the IUT may take no action				

Test Case Dynamic Behaviour				
Reference: PACKET/TIMER/PROPER/P03				
Identifier: P23_103				
Purpose: Verify T22 timer operation for both VCs and PVCs				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE +D2_PREAMBLE START TT22 (T22 - TDELTA) ?TIMEOUT TT22 START TDEL (TDELTA * 2) ?RESET [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG2 OR DIAG48 OR DIAG51)) OR #CAUSE_EQ_128] CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG48 OR #DIAG51)) OR CAUSE_EQ_128] CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG48 OR #DIAG51)) OR CAUSE_EQ_128] CANCEL +D_STATE_RES ?TIMEOUT TDEL [CCITT_80 OR CCITT_84] [(LC >= LPV) AND (LC <= #HPV)] +D2_POSTAMBLE [LC <> LPV] [ISO] +RSTRT_UNEXPECTED ?OTHERWISE CANCEL </pre>		<pre> RST_1 (LCI) CLR_1 (LCI) STRT_1DTEA </pre>	<pre> (P) (P) (P) (P) (F) (F) (F) </pre>	<pre> 1 2 </pre>

[7]

Continued on next page

Test Case Dynamic Behaviour				
Reference: PACKET/TIMER/PROPER/P07				
Identifier: P23_107				
Purpose: Verify T25 timer operation for VCs and PVCs				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE REPEAT EXCH_DAT_NOACK (COUNT) UNTIL #[COUNT = DEF_WIN_SZ] START TT25 (T25 - TDELTA) ?TIMEOUT TT25 START TDEL (TDELTA * 2) (COUNT := 0) ?DATA # (COUNT := COUNT+1) [COUNT MOD SEQ_MODULO = #PR] +D1_POSTAMBLE [COUNT MOD SEQ_MODULO < #PR] GOTO L1 ?DATA ?RESET +D1C_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TDEL ?OTHERWISE CANCEL +D1C_UNEXPECTED GOTO L2 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TT25 ?OTHERWISE CANCEL </pre>	<pre> L2 L1 </pre>	<pre> DAT_1A (LCI, COUNT) DAT_1 (LCI) RST_1 (LCI) </pre>	<pre> (P) F F F F F F </pre>	
<p>Extended Comments :</p> <p>NOTE: This test case is only applicable when the DTE implements ISO 8208 timers T24, T25, T27 and/or T28. CCITT X.25 1980 and 1984 do not specify timers T24 through T27. ISO 8208 does not specify T26 as optional, whereas T24, T25, T27, and T28 are specified as optional.</p>				

Test Case Dynamic Behaviour				
Reference: PACKET/TIMER/PROPER/P08				
Identifier: P23_108				
Purpose: Verify T26 timer operation for VCs and PVCs				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE <IUT!INT> START TD ?INT CANCEL TD START TT26 (T26 - TDELTA) ?TIMEOUT TT26 START TDEL (TDELTA * 2) ?RESET [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG144 OR DIAG145)) OR #CAUSE_EQ_128] CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [#(CAUSE_EQ_0 AND (DIAG0)) OR CAUSE_EQ_128] #CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [#(CAUSE_EQ_0 AND (DIAG0)) OR CAUSE_EQ_128] #CANCEL +D_STATE_RES ?TIMEOUT TDEL ?OTHERWISE CANCEL +RSET_UNEXPECTED +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TT26 ?OTHERWISE CANCEL TT26 </pre>		<pre> INT_1 (LCI) INT_1 (LCI) RST_1 (LCI) CLR_1 (LCI) STRT_1DTEA </pre>	<pre> (P) (P) (P) (P) (P) F F F F </pre>	
Extended Comments:				
<p>NOTE: This test case is only applicable when the DTE implements ISO 8208 timers T24, T25, T27 and/or T28. CCITT X.25 1980 and 1984 do not specify timers T24 through T27. ISO 8208 does not specify T26 as optional, whereas T24, T25, T27, and T28 are specified as optional.</p>				

Test Case Dynamic Behaviour				
Reference: PACKET/TIMER/PROPER/P09				
Identifier: P23_109				
Purpose: Verify T27 timer operation for VCs and PVCs				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !DATA (DATA.PS:=1,DATA.PR:=0) START TD ?REJ CANCEL TD START TT27 (T27 - TDELTA) ?TIMEOUT TT27 START TDEL (T27 - TDELTA) ?REJ CANCEL !DATA (DATA.PS:=0, DATA.PR:=0) +D1_POSTAMBLE ?RESET [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG1 OR DIAG144 OR DIAG147)) OR #CAUSE_EQ_128] CANCEL +D2_POSTAMBLE ?CLEAR [CLR_ON_ERR_R] [#(CAUSE_EQ_0 AND (DIAG0)) OR CAUSE_EQ_128] #CANCEL +D_STATE_CLR ?RESTART [RST_ON_ERR_R] [#(CAUSE_EQ_0 AND (DIAG0)) OR CAUSE_EQ_128] #CANCEL +D_STATE_RES +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TDEL ?OTHERWISE CANCEL TD +CLR_UNEXPECTED +RSTRT_UNEXPECTED </pre>		<pre> D_ONE (LCI) REJ_1 (LCI) REJ_1 (LCI) D_ONE (LCI) RST_1 (LCI) CLR_1 (LCI) STRT_1DTEA </pre>	<pre> (P) (P) (P) (P) (P) (P) F F </pre>	<pre> 1 </pre>

[6]
Continued on next page

..... Continued from previous page.
[6]

Behaviour Description	Label	Constraints Reference	V	Comments
?TIMEOUT TT27			F	
?OTHERWISE CANCEL TT27			F	
Extended Comments: 1) no information, invalid p(s), timer expired or retransmission count surpassed for Reject				
NOTE: This test case is only applicable when the DTE implements ISO 8208 timers T24, T25, T27 and/or T28. CCITT X.25 1980 and 1984 do not specify timers T24 through T27. ISO 8208 does not specify T26 as optional, whereas T24, T25, T27 and T28 are optional.				
NOTE: This test case is only applicable to IUTs that implement the reset procedure.				

Test Case Dynamic Behaviour				
Reference: PACKET/TIMER/PROPER/P10				
Identifier: P23_110				
Purpose: Verify T28 timer operation for VCs and PVCs				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) <IUT!REG> START TD ?REG CANCEL TD START TT28 (T28 - TDELTA) ?TIMEOUT TT28 START TDEL (TDELTA * 2) ?REG CANCEL !REGC +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TDEL ?OTHERWISE CANCEL +RSTRT_UNEXPECTED ?TIMEOUT TT28 ?OTHERWISE CANCEL TT28		REG_1 REG_1 REG_1 REGC_0	(P) F F F F	1
Extended Comments:				
1) no diagnostic code for timer T28 Expired in ISO 8208				
NOTE: This test case is only applicable when the DTE implements ISO 8208 timers T24, T25, T27 and/or T28. CCITT X.25 1980 and 1984 do not specify timers T24 through T27. ISO 8208 does not specify T26 as optional, whereas T24, T25, T27 and T28 are optional.				

Packet Layer Group 24: Address Tests

PLG 24 contains test cases for ADDRESS TESTS. PLG 24 is applicable to IUTs supporting Incoming Virtual Calls.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/ADDRESS/PROPER/P01				
Identifier: P24_101				
Purpose: Verify the IUT accepts an Incoming Call with maximum called address length				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD ?ACCEPT CANCEL TD +P4_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CALL_M(LCI) ANSR_1M(LCI)	(P) F F	1
Extended Comments: 1) no response				

Test Case Dynamic Behaviour				
Reference: PACKET/ADDRESS/PROPER/P02				
Identifier: P24_102				
Purpose: Verify the IUT accepts an Incoming Call with a valid calling and called address				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD ?ACCEPT CANCEL TD +P4_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CALL_0(LCI) ANSR_1(LCI)	(P) F F	no response

Test Case Dynamic Behaviour				
Reference: PACKET/ADDRESS/IMPROPER/P02				
Identifier: P24_202				
Purpose: Verify the IUT Clears an Incoming call packet with invalid called address				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (TVC_OR_IVC) !CALL START TD # ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG64 OR DIAG67)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG64 OR DIAG67)) OR #CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>		<pre> CALL_DINV (LCI) CLR_1(LCI) STRT_IDTEA </pre>	<pre> (P) (P) F F </pre>	<pre> 1 </pre>
<p>Extended Comments:</p> <p>1) no information, setup problem, invalid called</p> <p>NOTE: invalid addresses are considered to be those that are in conflict with the addresses supported by the IUT as stated in the PIXIT 2.2 and 2.3</p> <p>NOTE: this test case is only applicable to IUTs that verify addresses</p>				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/ADDRESS/IMPROPER/P03				
Identifier: P24_203				
Purpose: Verify the IUT Clears an Incoming Call packet with an invalid calling address				
Default :				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD # ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG64 OR DIAG68)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG64 OR DIAG68)) OR #CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CALL_GINV (LCI) CLR_1 (LCI) STRT_1DTEA	(P) F F	1 2
Extended Comments :				
1) the invalid address used is given in PIXIT question 2.1b				
2) no information, setup problem, invalid calling				

Packet Layer Group 25: Facility Tests

PLG 25 contains the test cases for facility tests. PLG 25 is applicable only to IUTs implementing some optional facilities. All facilities are tested individually without other facilities being present.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/FACILITY/PROPER/P01				
Identifier: P25_101				
Purpose: Verify the IUT supports fast select acceptance with no restriction on response				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD # ?CLEAR [(CAUSE_EQ_0 AND (DIAG<>64) OR #(DIAG<>65)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?ACCEPT CANCEL TD +P4_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CALL_0FST (LCI) CLR_1 (LCI) ANSR_1A (LCI)	(P) F F	1 no response
Extended Comments: 1) any diagnostic code except; Registration Problem, facility/registration code not allowed				

Test Case Dynamic Behaviour				
Reference: PACKET/FACILITY/PROPER/P02				
Identifier: P25_102				
Purpose: Verify the IUT supports fast select acceptance with restriction on response				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD # ?CLEAR [(CAUSE_EQ_0 OR (DIAG<>64) OR #(DIAG<>65)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CALL_0FSTR (LCI) CLR_1 (LCI)	(P) F F	1 no response
Extended Comments: 1) any diagnostic except; Registration Problem, facility/registration code not allowed				

Test Case Dynamic Behaviour

Reference: PACKET/FACILITY/PROPER/P03

Identifier: P25_103

Purpose: Verify the IUT accepts a Call Accept with user data, no restriction on response

Default:

Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (NO_LC) <IUT!CALL> START TD ?CALL (LCGN:=CALL.LCGN,LCN: #=CALL.LCN) CANCEL (LC := GET_LCI (LCGN, LCN)) [((LC >= LTC) AND (LC <= HTC)) #OR ((LC >= LOC) AND (LC <= HOC))] !ACCEPT START TD ?TIMEOUT TD +P4_POSTAMBLE ?CLEAR CANCEL TD !CLEARC +D1C_UNEXPECTED GOTO L1 +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD [(LC < LTC) OR (LC > HOC)] +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>	L1	<p>CALL_1FST</p> <p>CALL_1FST</p> <p>ANSR_0UD (LCI)</p> <p>CLR_1 (LCI)</p> <p>CLRC_0 (LCI)</p>	<p>(P)</p> <p>F</p> <p>F</p> <p>F</p> <p>F</p>	<p>no response</p>

Extended Comments:

STANDARD ISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/FACILITY/PROPER/P05				
Identifier: P25_105				
Purpose: Verify the IUT can handle a Call Request and Clear Request exchange with user data, restriction on response is supported				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC) <IUT!CALL> START TD ?CALL (LCGN:=CALL.LCGN,LCN: #=CALL.LCN) CANCEL (LC := GET_LCI (LCGN,LCN)) [((LC >= LTC) AND (LC <= HTC)) #OR ((LC >= LOC) AND (LC <= HOC))] !CLEAR START TD ?CLEARC CANCEL TD +R1_POSTAMBLE ?CLEAR CANCEL TD +R1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD [(LC < LTC) OR (LC > HOC)] +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CALL_1FSTR CALL_1FSTR CLR_U0 (LCI) CLRC_1 (LCI) CLR_1 (LCI)	(P) F F F F F	
Extended Comments:				

Test Case Dynamic Behaviour

Reference: PACKET/FACILITY/PROPER/P06

Identifier: P25_106

Purpose: Verify the IUT Clears a Call Connected packet with user data when restriction on response is in effect

Default:

Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (NO_LC) <IUT!CALL> START TD ?CALL (LCGN:=CALL.LCGN,LCN: #CALL.LCN) CANCEL (LC := GET_LCI (LCGN,LCN)) [((LC >= LTC) AND (LC <= HTC)) #OR ((LC >= LOC) AND (LC <= HOC))] !ACCEPT START TD ?CLEAR [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG32 OR DIAG42 OR DIAG64)) OR #CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD [(LC < LTC) OR (LC > HOC)] +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>		<pre> CALL_1FSTR CALL_1FSTR ANSR_0U1(LCI) CLR_1(LCI) </pre>	<pre> (P) F F F F F </pre>	<pre> 1 2 no response no response </pre>
<p>Extended Comments:</p> <ol style="list-style-type: none"> 1) one octet of user data 2) no information, not allowed, bad facility, clearing problem 				

STANDARD ISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/FACILITY/PROPER/P07				
Identifier: P25_107				
Purpose: Verify the IUT supports an Incoming Call with default throughput class				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC)				
!CALL START TD		CALL_0DTHR (LCI)		
#		ANSR_1A (LCI)	(P)	
?ACCEPT CANCEL TD				
+P4_POSTAMBLE				
?ACCEPT CANCEL TD		ANSR_1DTHR (LCI)	(P)	
#				
+P4_POSTAMBLE				
+CLR_UNEXPECTED				
+RSTRT_UNEXPECTED				
?TIMEOUT TD			F	
?OTHERWISE CANCEL TD			F	no response
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/FACILITY/PROPER/P09				
Identifier: P25_109				
Purpose: Verify the IUT supports an Incoming Call with default packet size				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC)				
!CALL START TD		CALL_PSZD (LCI)		
#		ANSR_1PAC (LCI)		
?ACCEPT (I := ACCEPT.F_PARM1) CANCEL				
#				
[I = 7] CANCEL			(P)	
+P4_POSTAMBLE				
[I <> 7] CANCEL			F	
?ACCEPT CANCEL		ANSR_1A (LCI)	(P)	
+P4_POSTAMBLE				
+RSTRT_UNEXPECTED				
?TIMEOUT TD			F	no response
?OTHERWISE CANCEL TD			F	
Extended Comments:				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/FACILITY/PROPER/P10				
Identifier: P25_110				
Purpose: Verify the IUT supports an Incoming Call with default window size				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC)				
!CALL START TD		CALL_DWIN (LCI)		
#		ANSR_1WIN (LCI)		
?ACCEPT (I := ACCEPT.F_PARM1) CANCEL				
#				
[I = 2] CANCEL			(P)	
+P4_POSTAMBLE				
[I <> 2] CANCEL			F	
?ACCEPT CANCEL		ANSR_1A (LCI)	(P)	no facilities
#				
+P4_POSTAMBLE				
+RSTRT_UNEXPECTED				
?TIMEOUT TD			F	
?OTHERWISE CANCEL TD			F	

Test Case Dynamic Behaviour				
Reference: PACKET/FACILITY/PROPER/P11				
Identifier: P25_111				
Purpose: Verify IUT supports an Incoming Call with Transit Delay indication				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC)				
!CALL START TD		CALL_TRD (LCI)		
?ACCEPT CANCEL TD		ANSR_1A (LCI)	(P)	
+P4_POSTAMBLE				
+RSTRT_UNEXPECTED				
?TIMEOUT TD			F	no response
?OTHERWISE CANCEL TD			F	

Test Case Dynamic Behaviour				
Reference: PACKET/FACILITY/PROPER/P12				
Identifier: P25_112				
Purpose: Verify IUT accepts an Incoming Call with Closed User Group < 100				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) [BCUG_NUM < 100] !CALL START TD # ?ACCEPT CANCEL TD +P4_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CALL_0CUG (LCI) ANSR_1A (LCI)	(P) F F	1
Extended Comments: 1) Basic format CUG				

Test Case Dynamic Behaviour				
Reference: PACKET/FACILITY/PROPER/P13				
Identifier: P25_113				
Purpose: Verify the IUT accepts an Incoming Call with CUG > 99 and CUG < 10000				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC OR_IVC) [(ECUG_NUM > 99) AND (ECUG_NUM < 10000)] !CALL START TD # ?ACCEPT CANCEL TD +P4_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CALL_ECUG (LCI) ANSR_1A (LCI)	(P) F F	1
Extended Comments: 1) extended format CUG				

Test Case Dynamic Behaviour				
Reference: PACKET/FACILITY/PROPER/P14				
Identifier: P25_114				
Purpose: Verify the IUT accepts a Call with Bilateral CUG				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD # ?ACCEPT CANCEL TD +P4_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CALL_BICUG (LCI) ANSR_1A (LCI)	(P)	
Extended Comments:				

Test Case Dynamic Behaviour				
Reference: PACKET/FACILITY/PROPER/P15				
Identifier: P25_115				
Purpose: Verify the IUT accepts a call with Reverse Charging facility				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD ?ACCEPT CANCEL TD +P4_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CALL_RC (LCI) ANSR_1A (LCI)	(P)	
			F	
			F	

Test Case Dynamic Behaviour				
Reference: PACKET/FACILITY/PROPER/P16				
Identifier: P25_116				
Purpose: Verify the IUT accepts a call using the CCITT-Specified DTE Calling and Called Address Extension Facility				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC)				
!CALL START TD		CALL_AEF (LCI)		
?ACCEPT CANCEL		ANSR_1A (LCI)	(P)	
+P4_POSTAMBLE				
?ACCEPT CANCEL		ANSR_1AEF (LCI)	(P)	
#				
+P4_POSTAMBLE				
+RSTRT_UNEXPECTED				
?TIMEOUT TD			F	
?OTHERWISE CANCEL			F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/FACILITY/IMPROPER/P01				
Identifier: P25_201				
Purpose: Verify the IUT Clears an Incoming Call packet with facility length greater than 109.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD # ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG39 OR DIAG64 OR DIAG69)) OR #CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG39 OR DIAG64 #OR DIAG69)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CALL_F110 (LCI) CLR_1(LCI)	(P)	1
		STRT_1DTEA	(P)	
			F	
			F	
Extended Comments:				
1) no information, not allowed, too long, setup problem, invalid length				

Test Case Dynamic Behaviour				
Reference: PACKET/FACILITY/IMPROPER/P02				
Identifier: P25_202				
Purpose: Verify the IUT Clears an Incoming Call packet with no facility field				
Default: ,				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (TVC_OR_IVC) !CALL START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG38 OR DIAG64 OR DIAG69)) OR #CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG38 OR DIAG64 #OR DIAG69)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>		<pre> CALL_F0 (LCI) CLR_1 (LCI) STRT_IDTEA </pre>	<pre> (P) (P) F F </pre>	<pre> 1 </pre>
Extended Comments:				
1) no information, not allowed, too short, Call Setup problem, invalid facility length				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/FACILITY/IMPROPER/P03				
Identifier: P25_203				
Purpose: Verify the IUT Clears an Incoming Call packet with facility parameter not allowed				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG64 OR DIAG66)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG64 OR DIAG66)) OR #CAUSE_EQ_128] CANCEL TD +GEN2_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CALL_FNA(LCI) CLR_1(LCI) STRT_1DTEA	(P) (P) F F	1
Extended Comments:				
1) no information, Call Setup problem, facility parameter not allowed				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/FACILITY/IMPROPER/P04				
Identifier: P25_204				
Purpose: Verify the IUT Clears an Incoming Call packet with call duration				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (TVC_OR_IVC) !CALL START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG42 OR DIAG64 OR DIAG65)) OR #CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG42 OR DIAG64 #OR DIAG65)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>		<pre> CALL_DUR(LCI) CLR_1(LCI) STRT_IDTEA </pre>	<pre> (P) (P) F F </pre>	<pre> 1 </pre>
Extended Comments:				
1) no information, Packet Not Allowed, packet type not compatible with facility, Call Setup problem, facility code not allowed				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/FACILITY/IMPROPER/P05				
Identifier: P25_205				
Purpose: Verify the IUT Clears a Call Connected packet containing Closed User Group (CUG)				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (NO_LC) <IUT!CALL> START TD ?CALL (LCGN:=CALL.LCGN, LCN: #=CALL.LCN) CANCEL (LC := GET_LCI (LCGN, LCN)) [((LC >= LTC) AND (LC <= HTC)) #OR ((LC >= LOC) AND (LC <= HOC))] !ACCEPT START TD # ?CLEAR [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG32 OR DIAG42 OR DIAG64 OR #DIAG65)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR DIAG42 #OR DIAG64 OR DIAG65)) OR CAUSE_EQ_128] #CANCEL +GEN2_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD [(LC < LTC) OR (LC > HTC)] +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>		<pre> CALL_1CUG CALL_1CUG ANSR_0CUG (LCI) CLR_1 (LCI) STRT_1DTEA </pre>	<pre> (P) (P) F F F F F </pre>	<pre> 1 </pre>
Extended Comments :				
1) no information, Packet Not Allowed, packet type not compatible with facility, Call Setup problem, facility code not allowed				

Test Case Dynamic Behaviour				
Reference: PACKET/FACILITY/IMPROPER/P06				
Identifier: P25_206				
Purpose: Verify the IUT Clears a Clear Indication containing flow control parameter negotiation				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE !CLEAR START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG42 OR DIAG64 OR DIAG69)) OR #CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG32 OR DIAG42 OR DIAG64 #OR DIAG69)) OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>		<pre> CLR_DWIN (LCI) CLR_1 (LCI) STRT_1DTEA </pre>	<pre> (P) (P) F F </pre>	<pre> 1 </pre>
Extended Comments:				
<p>1) no information, Packet Not Allowed, packet type not compatible with facility, Call Setup problem, invalid facility length</p>				

STANDARDSISO.COM Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour					
Reference: PACKET/FACILITY/IMPROPER/P07 Identifier: P25_207 Purpose: Verify the IUT Clears an Incoming Call packet with facilities length shorter than specified, answer initial Clear with a Clear Confirm with Reverse Charging facility. Default:					
Behaviour Description	Label	Constraints Reference	V	Comments	
<pre> +P1_PREAMBLE (TVC_OR_IVC) !CALL START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG38 OR DIAG64 OR DIAG69)) OR #CAUSE_EQ_128] START TD !CLEARC ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG32 OR DIAG42 OR DIAG64 OR DIAG65)) OR #CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [#(CAUSE_EQ_0 AND (DIAG0 OR DIAG32 OR DIAG42 #OR DIAG64 OR DIAG65)) OR CAUSE_EQ_128] #CANCEL +GEN2_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>		CALL_FSH(LCI) CLR_1(LCI)		3	
			CLRC_R(LCI) CLR_1(LCI)	(P)	2 1
			STRT_1DTEA	(P)	1
				F	
				F	
				F	
Extended Comments: <ol style="list-style-type: none"> 1) no information, packet not allowed, packet type not compatible with facility, call setup problem, facility code not allowed 2) a Clear Confirm with Reverse Charging 3) no information, Packet Not Allowed, packet too short, Call Setup problem, invalid facility length 					

Test Case Dynamic Behaviour				
Reference: PACKET/FACILITY/IMPROPER/P08				
Identifier: P25_208				
Purpose: Verify the IUT Clears an Incoming Call with facility code 'FE' H				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (TVC_OR_IVC) !CALL START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG64 OR DIAG65)) OR CAUSE_EQ_128] CANCEL #TD +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #AND (DIAG0 OR DIAG64 OR DIAG65)) OR #CAUSE_EQ_128] CANCEL TD +GEN2_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>		<pre> CALL_FCB(LCI) CLR_1(LCI) STRT_LDTEA </pre>	<pre> (P) (P) F F </pre>	<pre> 1 </pre>
Extended Comments :				
1) no information, Call setup, facility code not allowed				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/FACILITY/IMPROPER/P09				
Identifier: P25_209				
Purpose: Verify the IUT clears a Clear Indication with facility code 'FE' H				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD ?ACCEPT CANCEL TD !CLEAR START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG64 OR DIAG65)) OR CAUSE_EQ_128] CANCEL #TD +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [# (CAUSE_EQ_0 AND (DIAG0 OR DIAG64 OR #DIAG65)) OR CAUSE_EQ_128] CANCEL TD +GEN2_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CALL_0 (LCI) ANSR_1 (LCI) CLR_FCB (LCI) CLR_1 (LCI) STRT_1DTEA	(P) F F F F	1
Extended Comments:				
1) no information, Call setup, facility code not allowed				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Packet Layer Group 26: Registration Tests

PLG 26 contains the test cases for the Registration Tests. This packet layer test group is applicable if the IUT supports the REGISTRATION procedure.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/REG/PROPER/P01				
Identifier: P26_101				
Purpose: Verify the IUT registers D-BIT modification				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (ANY_VC) <IUT!REG> START TD ?REG CANCEL TD !REGC !CALL START TD ?ACCEPT [ACCEPT.DBIT = '1'B] #CANCEL +P4_POSTAMBLE +RSTRT_UNEXPECTED ?OTHERWISE CANCEL +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>		<pre> REG_1D REG_1D REGC_0D CALL_0D (LCI) ANSR_1D (LCI) </pre>	<pre> (P) F F F </pre>	<pre> 1 </pre>
Extended Comments:				
1) Verify the IUT accepts Calls with Delivery Confirmation after a Registration Request for Delivery Confirmation has been accepted.				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/REG/PROPER/P03				
Identifier: P26_103				
Purpose: Verify the IUT registers Extended Packet sequence numbering				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) <IUT!REG> START TD ?REG CANCEL TD !REGC !CALL START TD ?ACCEPT CANCEL TD REPEAT EXCH_DAT (COUNT) UNTIL #[PS > 8] [PS > 8] +D1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		REG_1X REG_1X REGC_0X CALL_X(LCI) ANSR_X(LCI)	(P) (P) F F F F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/REG/PROPER/P04				
Identifier: P26_104				
Purpose: Verify the IUT supports the Charging Information Facility (Per-Interface basis)				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) <IUT!REG> START TD ?REG CANCEL TD !REGC +P4D1_PREAMBLE !CLEAR START TD ?CLEARC CANCEL TD +R1_POSTAMBLE +D1C_UNEXPECTED GOTO L1 +RSET_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD	L1	REG_1CH REG_1CH REGC_0CH CLR_CHRG (LCI) CLRC_1 (LCI)	(P)	1
Extended Comments:				
1) send a Clear with Charging Information: Call Duration of 1 second.				

STANDARDSISO.COM - Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/REG/PROPER/P05				
Identifier: P26_105				
Purpose: Verify the IUT registers Throughput class negotiation				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) <IUT!REG> START TD ?REG CANCEL TD !REGC !CALL START TD ?ACCEPT CANCEL TD # +P4_POSTAMBLE ?ACCEPT CANCEL +P4_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		REG_1TH REG_1TH REGC_0TH CALL_THR(LCI) ANSR_1THR (LCI)	(P) (P) F F F F	1
Extended Comments:				
1) Call Accepted may include different throughput values according to rules of negotiation				

Test Case Dynamic Behaviour				
Reference: PACKET/REG/PROPER/P06				
Identifier: P26_106				
Purpose: Verify the IUT registers Flow Control negotiation				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC)				
<IUT!REG>		REG_1F		
START TD				
?REG CANCEL TD		REG_1F		
!REGC		REGC_0F		
!CALL START TD		CALL_PSZM		1
# (LCI)				
?ACCEPT CANCEL TD		ANSR_1PAC	(P)	2
# (LCI)				
+P4_POSTAMBLE				
?ACCEPT CANCEL		ANSR_1 (LCI)	(P)	
+P4_POSTAMBLE				
+CLR_UNEXPECTED				
+RSTRT_UNEXPECTED				
?TIMEOUT TD			F	
?OTHERWISE CANCEL TD			F	
+RSTRT_UNEXPECTED				
?TIMEOUT TD			F	
?OTHERWISE CANCEL TD			F	
Extended Comments :				
1) send a Call Request with packet size negotiation facility present				
2) Call Accepted may include different packet and/or window values according to rules of negotiation				

STANDARD.SISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/REG/PROPER/P07				
Identifier: P26_107				
Purpose: Verify the IUT registers Reverse Charging facility				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (ANY_VC) <IUT!REG> START TD ?REG CANCEL TD !REGC !CALL START TD ?ACCEPT CANCEL TD +P4_POSTAMBLE ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG65)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE +D1C_UNEXPECTED GOTO L1 +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>	L1	<pre> REG_1RC REG_1RC REGC_0RC CALL_RC (LCI) ANSR_1 (LCI) CLR_1 (LCI) </pre>	<pre> (P) (P) (P) (P) F F F F </pre>	1
Extended Comments:				
1) Call Request with reverse charging				

Test Case Dynamic Behaviour				
Reference: PACKET/REG/PROPER/P08				
Identifier: P26_108				
Purpose: Verify the IUT registers Fast Select acceptance				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) <IUT!REG> START TD ?REG CANCEL TD !REGC !CALL START TD # ?ACCEPT CANCEL TD +P4_POSTAMBLE ?CLEAR [(CAUSE_EQ_0 OR (DIAG0 #OR DIAG65)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD.		REG_1FST REG_1FST REGC_0FST CALL_0FST (LCI) ANSR_1 (LCI) CLR_1 (LCI)	(P) F F F F	1
Extended Comments:				
1) send a Call Request with Fast Select				

STANDARDSISO.COM Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/REG/PROPER/P09				
Identifier: P26_109				
Purpose: Verify the IUT registers outgoing calls barred facility				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC)				
<IUT!REG> START TD		REG_10CB		
?REG CANCEL TD		REG_10CB		
!REGC		REGC_00CB		
<IUT!CALL> START TD		CALL_1		
?TIMEOUT TD			(P)	2
+R1_POSTAMBLE				
+RSTRT_UNEXPECTED			F	1
?OTHERWISE CANCEL TD				
+RSTRT_UNEXPECTED			F	
?TIMEOUT TD			F	
?OTHERWISE CANCEL TD			F	
Extended Comments:				
1) When outgoing calls are barred the IUT should not send a Call Request				
2) no response				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/REG/PROPER/P10				
Identifier: P26_110				
Purpose: Verify the IUT registers Incoming Calls Barred				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (ANY_VC) <IUT!REG> START TD ?REG CANCEL TD !REGC !CALL START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 #OR DIAG65)) OR CAUSE_EQ_128] CANCEL TD +GEN1_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>		<pre> REG_1ICB REG_1ICB REGC_0ICB CALL_0 (LCI) CLR_1 (LCI) </pre>	<pre> (P) F F F F </pre>	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/REG/PROPER/P11				
Identifier: P26_111				
Purpose: Verify the IUT registers Default Throughput Class				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+R1_PREAMBLE (ANY_VC) <IUT!REG> START TD ?REG CANCEL TD !REGC !CALL START TD ?ACCEPT CANCEL TD +P4_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		REG_1DEF REG_1DEF REGC_0DEF CALL_0 (LCI) ANSR_1 (LCI)	(P) F F F F	
Extended Comments:				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/REG/PROPER/P12				
Identifier: P26_112				
Purpose: Verify the IUT registers Non-standard Default Packet Size				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (ANY_VC) <IUT!REG> START TD ?REG CANCEL TD !REGC !CALL START TD ?ACCEPT CANCEL TD !DATA +RX_DATA +P4_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>		<pre> REG_1PSZ REG_1PSZ REGC_0PSZ CALL_0 (LCI) ANSR_1 (LCI) D_NSSZ (LCI) </pre>	<pre> (P) F F F F </pre>	<pre> 1 </pre>
Extended Comments :				
1) Transmit a Data packet of non-standard size				

STANDARDSISO.COM Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/REG/PROPER/P13				
Identifier: P26_113				
Purpose: Verify the IUT registers Nonstandard Default Window size				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (ANY_VC) <IUT!REG> START TD ?REG CANCEL TD !REGC !CALL START TD ?ACCEPT CANCEL TD REPEAT EXCH_DAT_NOACK (COUNT) #UNTIL [COUNT = NS_DEF_WIN_SZ_NUM] [COUNT = #NS_DEF_WIN_SZ_NUM] +P4_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>		<pre> REG_1WSZ REG_1WSZ REGC_0WSZ CALL_0 (LCI) ANSR_1 (LCI) </pre>	<p>(P)</p> <p>F</p> <p>F</p> <p>F</p> <p>F</p>	
Extended Comments :				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Packet Layer Group 27: Multiple LCI Assignment Tests

PLG 27 contains the test cases for Logical Channel Identifier Assignment. PLG 27 is applicable only to IUTs supporting Virtual Calls. The number of LCIs tested is dependant on answers given in the PIXIT and may be only one.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/LCI/PROPER/P01				
Identifier: P27_101				
Purpose: Verify the IUT can set up simultaneous calls.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +INITDTE REPEAT CALLSETUP UNTIL [COUNT = #SIM_CALL_OUT] !RESTART START TD ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL TD +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL TD CALLSETUP <IUT!CALL> START TD ?CALL (LCGN:=CALL.LCGN,LCN:=CALL.LCN) #CANCEL (LC := GET_LCI (LCGN,LCN)) [((LC >= LTC) AND (LC <= HTC)) OR #((LC >= LOC) AND (LC <= HOC))] +LC_VERFIY(LC) !ACCEPT START TD ?TIMEOUT TD (COUNT := COUNT + 1) +D1C_UNEXPECTED GOTO L1 </pre>	L1	<pre> STRT_DCE STRTC_1 STRT_1DTEA CALL_1 CALL_1 ANSR_0(LCI) </pre>	<pre> (P) (P) F F </pre>	<pre> count = 0 1 </pre>

[9]

Continued on next page

..... Continued from previous page.

[8]

Behaviour Description	Label	Constraints Reference	V	Comments
+CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD [(LC < LTC) OR (LC > HOC)]			F F	
+CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD			F F	
Extended Comments :				
1) Verify the Logical Channel is not already in use by a previous call.				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/LCI/PROPER/P02				
Identifier: P27_102				
Purpose: Verify the IUT can set up and clear simultaneous calls				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +INITDTE REPEAT CALLSETUP UNTIL [COUNT = #SIM_CALL_OUT] (LC := HOC) REPEAT CALLDISC UNTIL [LC < LOC] (LC := HTC) REPEAT CALLDISC UNTIL [LC < LTC] [LC < LTC] CALLSETUP <IUT!CALL> START TD ?CALL (LCGN:=CALL.LCGN, LCN:=CALL.LCN) #CANCEL (LC:=GET_LCI(LCGN, LCN)) [((LC >= LTC) AND (LC <= HTC)) OR #((LC >= LOC) AND (LC <= HOC))] +LC_VERIFY(LC) !ACCEPT START TD ?TIMEOUT TD (COUNT := COUNT + 1) +DLC_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE.CANCEL TD </pre>	L1	<p>CALL_1</p> <p>CALL_1</p> <p>ANSR_0 (LCI)</p>	<p></p> <p>P</p> <p></p> <p>F</p>	<p>count = 0</p> <p>1</p> <p>2</p>

STANDARDSP60.COM. Click to view the full PDF of ISO/IEC 8882-3:1991

[8]

Continued on next page

..... Continued from previous page.

[5]

Behaviour Description	Label	Constraints Reference	V	Comments
<p>[(LC < LTC) OR (LC > HOC)]</p> <p>+CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD</p> <p>CALLDISC</p> <p>(LCGN := GET_LCGN(LC)) (LCN := GET_LCN(LC))</p> <p>+P4_POSTAMBLE</p> <p>(LC := LC - 1)</p>			F F F	3
<p>Extended Comments:</p> <p>1) disconnect all the call on Outgoing Logical channels from the Highest Outgoing LC to Lowest Outgoing LC</p> <p>2) disconnect all the calls on Two-Way Logical channels from the Highest Two-way LC to the Lowest Two-way LC</p> <p>3) clear each call</p>				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/LCI/PROPER/P03				
Identifier: P27_103				
Purpose: Verify the IUT can accept simultaneous calls				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +R1_PREAMBLE (NO_LC) (LC := LTC) REPEAT CALLSETUP UNTIL [(COUNT = #SIM_CALL_IN) OR (LC > HTC)] (LC := LOC) REPEAT CALLSETUP UNTIL [(COUNT = #SIM_CALL_IN) OR (LC > HOC)] !RESTART START TD ?RESTARTC CANCEL TD +R1_POSTAMBLE ?RESTART CANCEL TD +R1_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL TD CALLSETUP !CALL START TD ?ACCEPT START TD ?TIMEOUT TD (LC := LC + 1) (COUNT := COUNT + 1) +D1C_UNEXPECTED GOTO L1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>	L1	<pre> STRT_DCE STRTC_1 STRT_1DTEA CALL_0(LCI) ANSR_1(LCI) </pre>	<pre> (P) (P) F F F F </pre>	<pre> count = 0 </pre>

Packet Layer Group 28: DTE to DTE Tests

PLG 28 contains the test cases for DTE/DTE tests. PLG 28 is applicable for all IUTs. However, there are some tests within this PLG which are only applicable if the IUT supports that capability.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/DTE/PROPER/P01				
Identifier: P28_101				
Purpose: Verify the IUT acts as a DTE during call collision				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (TVC) !RESTART START TD ?RESTARTC CANCEL TD +SUBTREE ?RESTART CANCEL TD +SUBTREE SUBTREE <IUT!CALL> START TD ?CALL (LCGN:=CALL.LCGN, LCN:=CALL.LCN) #CANCEL (LC := GET_LCI (LCGN, LCN)) [((LC >= LTC) AND (LC <= HTC)) OR #((LC >= LOC) AND (LC <= HOC))] !CALL START TD ?TIMEOUT TD !ACCEPT +P4_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL TD [[(LC < LTC) OR (LC > HOC)] ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>		<pre> STRT_DCE STRTC_1 STRT_1DTEA CALL_1 CALL_1 CALL_0 (LCI) ANSR_0 (LCI) </pre>	<pre> (P) F F F F </pre>	
Extended Comments:				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/DTE/PROPER/P02				
Identifier: P28_102				
Purpose: Verify the IUT acts as a DCE when sent a Restart with Cause Code DTE originated				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE (NO_LC) !RESTART START TD ?RESTARTC CANCEL TD +SUBTREE ?RESTART CANCEL TD +SUBTREE ?TIMEOUT TD ?OTHERWISE CANCEL TD SUBTREE <IUT!CALL> START TD ?CALL (LCGN:=CALL.LCGN,LCN:=CALL.LCN) #CANCEL (LC := GET_LCI (LCGN,LCN)) [((LC >= LIC) AND (LC <= HIC)) OR #((LC >= LTC) AND (LC <= HTC))] +ASSIGN_DTE (TVC_OR_OVC) !CALL START TD ?ACCEPT +P4_POSTAMBLE +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD [(LC < LIC) OR (LC > HTC)] ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>		<pre> STRT_DTE STRTC_1 STRT_1DCEA CALL_1 CALL_1 CALL_0 (LCI) ANSR_1 (LCI) </pre>	<pre> F F (P) F F F F F </pre>	

Test Case Dynamic Behaviour				
Reference: PACKET/DTE/PROPER/P04				
Identifier: P28_104				
Purpose: Verify the IUT acting as a DTE Clears a Call packet with a facility code not applicable to DTE/DTE operation				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_IVC) !CALL START TD ?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG64 OR DIAG65)) OR CAUSE_EQ_128] CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 #OR (DIAG0 OR DIAG64 OR DIAG65)) OR #CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		CALL_NUI(LCI) CLR_1(LCI)	(P)	1 2
		STRT_1DTEA	(P)	
			F	
			F	
Extended Comments:				
1) CALL_NUI uses the facility Network User Identification				
2) no information, setup problem invalid facility				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/DTE/PROPER/P05				
Identifier: P28_105				
Purpose: Verify the IUT acting as a DTE accepts a Registration Request and issues a Restart Request				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +P1_PREAMBLE(NO_LC) +P4D1_PREAMBLE !REG START TD ?REGC [(CAUSE_EQ_0 AND (DIAG0 OR #DIAG160 OR DIAG167)) OR CAUSE_EQ_128] #CANCEL START TD ?RESTART [(CAUSE_EQ_0 AND DIAG0) #OR CAUSE_EQ_128] CANCEL +GEN2_POSTAMBLE ?TIMEOUT TD ?OTHERWISE CANCEL TD ?TIMEOUT TD ?OTHERWISE CANCEL TD </pre>		<pre> REG_0 REGC_1 STRT_1DTEA </pre>	<pre> (P) F F F F </pre>	<pre> 1 </pre>
Extended Comments: 1) wait for Restart				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/DTE/PROPER/P06				
Identifier: P28_106				
Purpose: Verify the IUT acting as a DTE handles Registration Request collision				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (NO_LC)				
<IUT!REG>		REG_1		
START TD				
?REG CANCEL TD		REG_1		
!REG START TD		REG_0		
?TIMEOUT TD			(P)	
+R1_POSTAMBLE				
?REG CANCEL TD		REG_1	(P)	
!REGC		REGC_0		
+R1_POSTAMBLE				
+RSTRT_UNEXPECTED				
?OTHERWISE CANCEL TD			F	
+RSTRT_UNEXPECTED				
?TIMEOUT TD			F	
?OTHERWISE CANCEL TD			F	
Extended Comments:				
see clause 13.1.1.2 of ISO 8208				

STANDARDSISO.COM Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/DTE/PROPER/P07				
Identifier: P28_107				
Purpose: Verify the IUT retransmits a Data packet upon receipt of a Reject Request				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (ANY_VC) +P4D1_PREAMBLE				
<IUT!DATA> START TD		D_ONE (LCI)		
?DATA CANCEL TD	L1	D_ONE (LCI)		
!REJ [REJ_SUPP] START TD		REJ_0 (LCI)		
?DATA CANCEL TD	L2	D_ONE (LCI)	(P)	
+D1_POSTAMBLE				
+D1C_UNEXPECTED GOTO L2				
+CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD			F F	
+D1C_UNEXPECTED GOTO L1				
+CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD			F F	
Extended Comments:				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Case Dynamic Behaviour				
Reference: PACKET/DTE/PROPER/P08				
Identifier: P28_108				
Purpose: Verify the IUT acting as a DCE accepts a Clear with cause code DTE originated				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+P1_PREAMBLE (TVC_OR_OVC) !RESTART START TD ?RESTARTC CANCEL +SUBTREE ?RESTART CANCEL +SUBTREE ?TIMEOUT TD SUBTREE !CLEAR START TD ?CLEARC CANCEL TD +R1_POSTAMBLE ?CLEAR [CAUSE_NOT_0 AND CAUSE_NOT_128] #CANCEL +GEN1_POSTAMBLE ?RESTART [RST_ON_ERR_C] [CAUSE_NOT_0 OR #CAUSE_NOT_128] CANCEL +GEN2_POSTAMBLE +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL TD		STRT_DTE STRTC_1 STRT_1DCEA CLR_0 (LCI) CLRC_1 (LCI) CLR_1 (LCI) STRT_1DTEA	F (P) (P) (P) F F	

STANDARD ISO.COM · Click to view the full PDF of ISO/IEC 8882-3:1991

Test Step Dynamic Behaviour				
Reference: PACKET/ASSIGN_DCE Identifier: ASSIGN_DCE (TYPE : INTEGER) Objective: Assign a value to the test case variables LC, LCGN, LCN based on the requested Logical Channel TYPE. Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
(LC := NULL) [TYPE = NO_LC] [LCI_UNDER_TEST <> NULL] +ASSIGNMENT (LCI_UNDER_TEST) [TYPE = TVC] +ASSIGNMENT (LTC) [TYPE = PVC] +ASSIGNMENT (LPV) [TYPE = IVC] +ASSIGNMENT (LIC) [TYPE = UVC] +ASSIGNMENT (LUC) [TYPE = ANY_VC] [LIC <> NULL] +ASSIGNMENT (LIC) [LTC <> NULL] +ASSIGNMENT (LTC) [LOC <> NULL] +ASSIGNMENT (LOC) [LPV <> NULL] +ASSIGNMENT (LPV) [LC = NULL] [TYPE = TVC_OR_IVC] [LIC <> NULL]			F	

[3]

Continued on next page

..... Continued from previous page.

[4]

Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +ASSIGNMENT (LIC) [LTC <> NULL] +ASSIGNMENT (LTC) [LC = NULL] [TYPE = SVC] [LIC <> NULL] +ASSIGNMENT (LIC) [LTC <> NULL] +ASSIGNMENT (LTC) [LC = NULL] [LC = NULL] ASSIGNMENT (LOGICAL_CHANNEL : INTEGER) (LCGN := GET_LCGN (LOGICAL_CHANNEL)) (LCN := GET_LCN (LOGICAL_CHANNEL)) (LC := LOGICAL_CHANNEL) </pre>			<p>F</p> <p>F</p> <p>F</p>	
<p>Extended Comments :</p> <p>NOTE: The return parameter is set to a value for the Logical Channel Number which will be used by the calling test case. The assignment of LCN depends on the ability of the IUT to support the requested channel TYPE. For example, if the test requires an LCN for call setup either an SVC or IVC channel is assigned, depending on which one is specified in the PICS.</p> <p>NOTE: All LCN ranges are made from the IUT perspective. As an example all LCNs which are configured as Incoming Only may be used by the Tester to transmit Call Requests to the IUT. The IUT may only received Incoming Calls on such a Logical Channel. The assignment of logical channels is as if the Tester was acting as a DCE.</p>				

STANDARD ISO.COM. Click to view the full PDF of ISO/IEC 8882-3:1991

Test Step Dynamic Behaviour				
Reference: PACKET/ASSIGN_DTE Identifier: ASSIGN_DTE (TYPE : INTEGER) Objective: Assign a value to the test case variables LC, LCGN, LCN based on the requested Logical Channel TYPE. Assignment is done as if the tester were acting as a DTE. Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
(LC := NULL) [TYPE = NO_LC] [TYPE = TVC] +ASSIGNMENT (HTC) [TYPE = PVC] +ASSIGNMENT (HPV) [TYPE = OVC] +ASSIGNMENT (HOC) [TYPE = UVC] +ASSIGNMENT (LUC) [TYPE = ANY_VC] [HOC <> NULL] +ASSIGNMENT (HOC) [HTC <> NULL] +ASSIGNMENT (HTC) [HIC <> NULL] +ASSIGNMENT (HIC) [HPV <> NULL] +ASSIGNMENT (HPV) [LC = NULL] [TYPE = TVC_OR_OVC] [HOC <> NULL] +ASSIGNMENT (HOC)			F	

[4]
Continued on next page

..... Continued from previous page.

[3]

Behaviour Description	Label	Constraints Reference	V	Comments
[HTC <> NULL] +ASSIGNMENT (HTC)				
[LC = NULL]			F	
[TYPE = SVC]				
[HOC <> NULL] +ASSIGNMENT (HOC)				
[HTC <> NULL] +ASSIGNMENT (HTC)				
[LC = NULL]			F	
[LC = NULL]			F	
ASSIGNMENT (LOGICAL_CHANNEL : INTEGER)				
(LCGN := GET_LCGN (LOGICAL_CHANNEL))				
(LCN := GET_LCN (LOGICAL_CHANNEL))				
(LC := LOGICAL_CHANNEL)				
Extended Comments :				

Test Step Dynamic Behaviour				
Reference:PACKET/CLR_UNEXPECTED				
Identifier:CLR_UNEXPECTED				
Objective:Handle an unexpected Clear packet				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
?CLEAR CANCEL !CLEARC		CLR_1 (LCI) CLRC_0 (LCI)	I	

Test Step Dynamic Behaviour				
Reference: PACKET/D_STATE_CLR				
Identifier: D_STATE_CLR				
Objective: When a Clear is received from an IUT in a D state (D1, D2, D3, I1, I2, J1, J2, F1, F2) the verification step must use R1_POSTAMBLE.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
!CLEARC +R1_POSTAMBLE		CLRC_0 (LCI)		
Extended Comments:				
1) a Clear is not a valid packet on a PVC				

Test Step Dynamic Behaviour				
Reference: PACKET/D_STATE_RES				
Identifier: D_STATE_RES				
Objective: When a Restart is received from an IUT in a D state (D1, D2, D3, I1, I2, J1, J2, F1, F2) the verification step uses R1_POSTAMBLE if the Logical Channel is a VC or D1_POSTAMBLE if the Logical Channel is a PVC.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
!RESTARTC [(LC >= LPV) AND (LC <= HPV)] +D1_POSTAMBLE [LC > HPV] +R1_POSTAMBLE		STRTC		

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Step Dynamic Behaviour				
Reference: PACKET/D1_UNEXPECTED				
Identifier: D1_UNEXPECTED				
Objective: Handle any acceptable but unexpected packets received from the IUT while in state D1, (Reset and Reject excluded).				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
?DATA PR_VERIFY PR_UPDATE PT_UPDATE1 # ?RR PT_UPDATE2 ?RNR PT_UPDATE3 +RX_INTERRUPT		DAT_1A(LCI, PR) RR_1(LCI) RNR_1(LCI)		1
Extended Comments: 1) unexpected but valid packet				

Test Step Dynamic Behaviour				
Reference: PACKET/D1A_UNEXPECTED				
Identifier: D1A_UNEXPECTED				
Objective: Handle any acceptable but unexpected packets received from the IUT while in Data Transfer (D1).				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
?DATA PR_VERIFY PR_UPDATE PT_UPDATE1 # ?RR PT_UPDATE2 ?RNR PT_UPDATE3 ?REJ [REJ_SUPP] PT_UPDATE4 ?RESET +RX_INTERRUPT		DAT_1A(LCI, PR) RR_1(LCI) RNR_1(LCI) REJ_1A(LCI) RST_1(LCI)		1
Extended Comments: 1) verify the P(S) contained in the Data packet is equal to the next expected packet by the Tester. Verify the P(R) contained in the received Data packet acknowledges only packets that have been previously transmitted. Update the Testers' next expected packet counter PR.				

STANDARD5550.COM .Click to view the full PDF of ISO/IEC 8882-3:1991

Test Step Dynamic Behaviour				
Reference:PACKET/D1B_UNEXPECTED Identifier:D1B_UNEXPECTED Objective:Handle any acceptable but unexpected packets received from the IUT while in Data Transfer (D1), (Interrupt excluded) Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
?RR ?DATA PR_VERIFY PR_UPDATE PT_UPDATE1 # ?RNR ?REJ [REJ_SUPP]		RR_1(LCI) DAT_1A(LCI, PR) RNR_1(LCI) REJ_1A(LCI)		1
Extended Comments: 1) verify the P(S) contained in the Data packet is equal to the next expected packet by the Tester. Verify the P(R) contained in the received Data packet acknowledges only packets that have been previously transmitted. Update the Testers next expected packet counter PR, and the trailing window edge counter PT				

Test Step Dynamic Behaviour				
Reference:PACKET/D1C_UNEXPECTED Identifier:D1C_UNEXPECTED Objective:Handle any acceptable but unexpected packets received while the IUT is in Data Transfer (D1), (Reset excluded). Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
?DATA PR_VERIFY PR_UPDATE PT_UPDATE1 # ?RR PT_UPDATE2 ?RNR PT_UPDATE3 ?REJ [REJ_SUPP] PT_UPDATE4 +RX_INTERRUPT		DAT_1A(LCI, PR) RR_1(LCI) RNR_1(LCI) REJ_1A(LCI)		1
Extended Comments: 1) verify the P(S) contained in the Data packet is equal to the next expected packet by the Tester. Verify the P(R) contained in the received Data packet acknowledges only packets that have been previously transmitted. Update the Testers next expected packet counter PR.				

Test Step Dynamic Behaviour				
Reference: PACKET/D1_PVC_PREAMBLE				
Identifier: D1_PVC_PREAMBLE				
Objective: Put the IUT into state D1, only used for PVC logical channels.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +ASSIGN_DCE (PVC) [NOT FIRST_TEST] !RESET START TD ?RESETC CANCEL +SUBTREE ?RESET CANCEL +SUBTREE ?RESTART [RST_ON_ERR_R_PVC] CANCEL !RESTARTC START TR ?TIMEOUT TR ?OTHERWISE GOTO DPVPR2 ?TIMEOUT TD +INITDTE ?OTHERWISE GOTO DPVPR1 [FIRST_TEST] +INITDTE (FIRST_TEST := FALSE) SUBTREE START TS ?TIMEOUT TS ?OTHERWISE GOTO DPVPR3 </pre>	<p>DPVPR1</p> <p>DPVPR2</p> <p>DPVPR3</p>	<p>RST_0 (LCI) RSTC_1 (LCI)</p> <p>RST_1 (LCI)</p> <p>STRT_1DTEA STRTC</p>		<p>iut in d1</p> <p>iut in d1</p>
Extended Comments:				

STANDARD ISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Step Dynamic Behaviour				
Reference: PACKET/D2_POSTAMBLE				
Identifier: D2_POSTAMBLE				
Objective: Verify the IUT is in state D2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
!RESETC START TD ?TIMEOUT TD +D1C_UNEXPECTED GOTO D2POL1 +RSET_UNEXPECTED +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL	D2POL1	RSTC_0 (LCI)	F	

Test Step Dynamic Behaviour				
Reference: PACKET/D2_PREAMBLE				
Identifier: D2_PREAMBLE				
Objective: Put the IUT into state D2 DTE Reset Request.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
!DATA START TD ?RESET CANCEL +D1C_UNEXPECTED GOTO D2PRL1 +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL	D2PRL1	D_PR7 (LCI) RST_1D2 (LCI)	F F	1 2
Extended Comments:				
1) Data packet with P(R)=7 P(S)=0				
2) Diagnostic code is '02'H: invalid P(R)				
NOTE This subtree assumes the IUT is in state D1 Flow Control Ready when attached.				

Test Step Dynamic Behaviour				
Reference: PACKET/D3_UNEXPECTED Identifier: D3_UNEXPECTED Objective: Handles any unexpected responses from the IUT immediately after the IUT has been put into state D3. State D3 DXE Reset Request is a transient state. Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
?RESET CANCEL ?CLEAR CANCEL !CLEARC ?RESTART CANCEL !RESTARTC ?RESETC CANCEL ?OTHERWISE CANCEL		RST_1 (LCI) CLR_1 (LCI) CLRC_0 (LCI) STRT_1DTEA STRTC RSTC_1 (LCI)	I I I F F	1
Extended Comments: 1) Receipt of a Reset Confirm results in a FAIL verdict since the IUT did not remain in state D3 for the specified minimum time.				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Step Dynamic Behaviour				
Reference: PACKET/EXCH_DAT_EMPTY				
Identifier: EXCH_DAT_EMPTY (COUNT : INTEGER)				
Objective: Send the IUT the sequence of Data packets defined in PIXIT question 2.14 in order to test for the handling of an empty Data packet.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
[IUT_TX AND IUT_RX] [FIRST_DATA_FROM_IUT] +IUT_TX_DATA +TX_DATA_EMPTY (COUNT) +RX_DATA (COUNT := COUNT + 1) [NOT FIRST_DATA_FROM_IUT] +TX_DATA_EMPTY (COUNT) +RX_DATA +IUT_TX_DATA (COUNT := COUNT + 1) [IUT_RX] +TX_DATA_EMPTY (COUNT) +RX_DATA (COUNT := COUNT + 1)				

STANDARDS160.COM :: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Step Dynamic Behaviour				
Reference: PACKET/EXCH_DAT Identifier: EXCH_DAT (COUNT : INTEGER) Objective: If the IUT can receive and transmit data then send one data packet to the IUT and request the IUT to send one data packet. If the IUT is a send only IUT then request the IUT to send one data packet. If the IUT is a receive only IUT then send the IUT one data packet. Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
[IUT_TX AND IUT_RX] [FIRST_DATA_FROM_IUT] +IUT_TX_DATA +TX_DATA (COUNT) +RX_DATA (COUNT := COUNT + 1) [NOT FIRST_DATA_FROM_IUT] +TX_DATA (COUNT) +RX_DATA +IUT_TX_DATA (COUNT := COUNT + 1) [IUT_TX] +IUT_TX_DATA (COUNT := COUNT + 1) [IUT_RX] +TX_DATA (COUNT) (COUNT := COUNT + 1)				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Step Dynamic Behaviour				
Reference: PACKET/EXCH_DAT_MBIT				
Identifier: EXCH_DAT_MBIT (COUNT : INTEGER)				
Objective: Send the IUT the sequence of Data packets defined in PIXIT question 2.15 in order to test for support of the M-bit.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> [IUT_TX AND IUT_RX] [FIRST_DATA_FROM_IUT] +IUT_TX_DATA +TX_DATA_MBIT (COUNT) +RX_DATA (COUNT := COUNT + 1) [NOT FIRST_DATA_FROM_IUT] +TX_DATA_MBIT (COUNT) +RX_DATA +IUT_TX_DATA (COUNT := COUNT + 1) [IUT_RX] +TX_DATA_MBIT (COUNT) +RX_DATA (COUNT := COUNT + 1) </pre>				

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Step Dynamic Behaviour				
Reference: PACKET/EXCH_DAT_NOACK Identifier: EXCH_DAT_NOACK (COUNT : INTEGER) Objective: If the IUT can receive and transmit data then send one data packet to the IUT and request the IUT to send one data packet. If the IUT is a send only IUT then request the IUT to send one data packet. Do not acknowledge receipt of Data packets from the IUT. Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
[IUT_TX AND IUT_RX] [FIRST_DATA_FROM_IUT] +IUT_TX_DATA +TX_DATA_NOACK (COUNT) +RX_DATA (COUNT := COUNT + 1) [NOT FIRST_DATA_FROM_IUT] +TX_DATA_NOACK (COUNT) +RX_DATA +IUT_TX_DATA (COUNT := COUNT + 1) [IUT_TX] +IUT_TX_DATA (COUNT := COUNT + 1)				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Step Dynamic Behaviour				
Reference: PACKET/EXCH_DAT_QBIT				
Identifier: EXCH_DAT_QBIT (COUNT : INTEGER)				
Objective: Send the IUT the sequence of Data packets defined in PIXIT question 2.12 in order to test for correct error handling of a changing Q-bit.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
[IUT_TX AND IUT_RX] [FIRST_DATA_FROM_IUT] +IUT_TX_DATA +TX_DATA_QBIT (COUNT) +RX_DATA (COUNT := COUNT + 1) [NOT FIRST_DATA_FROM_IUT] +TX_DATA_QBIT (COUNT) +RX_DATA +IUT_TX_DATA (COUNT := COUNT + 1)				1
[IUT_RX] +TX_DATA_QBIT (COUNT) +RX_DATA (COUNT := COUNT + 1)				2
Extended Comments:				
1) IUT is capable of receiving and sending Data packets				
2) IUT can only received Data packets				

Test Step Dynamic Behaviour				
Reference: PACKET/EXCH_DAT_QBIT_A Identifier: EXCH_DAT_QBIT_A (COUNT : INTEGER) Objective: Send the IUT the sequence of Data packets defined in PIXIT question 2.13 in order to test for support of the Q-bit. Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
[IUT_TX AND IUT_RX] [FIRST_DATA_FROM_IUT] +IUT_TX_DATA +TX_DATA_QBIT_A (COUNT) +RX_DATA (COUNT := COUNT + 1) [NOT FIRST_DATA_FROM_IUT] +TX_DATA_QBIT_A (COUNT) +RX_DATA +IUT_TX_DATA (COUNT := COUNT + 1) [IUT_RX] +TX_DATA_QBIT_A (COUNT) +RX_DATA (COUNT := COUNT + 1)				

Test Step Dynamic Behaviour				
Reference: PACKET/GEN1_POSTAMBLE Identifier: GEN1_POSTAMBLE Objective: General postamble used after receipt of a CLEAR from the IUT. Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
!CLEARC +R1_POSTAMBLE		CLRC_0 (LCI)		
Extended Comments: NOTE: Since this sequence occurs frequently throughout the test suite it has been made into a subtree to abbreviate the test cases.				

Test Step Dynamic Behaviour				
Reference: PACKET/GEN2_POSTAMBLE Identifier: GEN2_POSTAMBLE Objective: General postamble used after the receipt of a RESTART from the IUT. Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
!RESTARTC +R1_POSTAMBLE		STRTC		
Extended Comments: NOTE: Since this sequence occurs frequently throughout the test suite it has been made into a subtree to abbreviate the test cases.				

Test Step Dynamic Behaviour				
Reference: PACKET/INITDTE Identifier: INITDTE Objective: Put the IUT into state R1 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
!RESTART START TD ?RESTARTC CANCEL START TR ?TIMEOUT TR ?RESTART CANCEL START TR ?TIMEOUT TR ?TIMEOUT TD ?OTHERWISE CANCEL		STRT_DCE STRTC_1 STRT_1DTEA	 F F	 2 1
Extended Comments: 1) Unable to initialize the IUT. No answer from IUT. 2) A Restart Collision NOTE: Based on the actions of the underlying layer other initialization sequences may be necessary to ensure that the IUT is in state R1.				

Test Step Dynamic Behaviour				
Reference: PACKET/IUT_TX_DATA Identifier: IUT_TX_DATA Objective: Request the IUT to transmit one Data packet. Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<IUT!DATA> +RX_DATA		DAT_1 (LCI)		

Test Step Dynamic Behaviour				
Reference: PACKET/J2_UNEXPECTED Identifier: J2_UNEXPECTED Objective: Handle unexpected packets from the IUT while in state J2. Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
+CLR_UNEXPECTED +RSTRT_UNEXPECTED ?INTC_CANCEL ?OTHERWISE_CANCEL		INTC_1 (LCI)	F F	1
Extended Comments: 1) Receipt of an Interrupt Confirmation results in a FAIL verdict since the IUT did not remain in state J2 for the specified minimum time.				

Test Step Dynamic Behaviour				
Reference: PACKET/LC_VERIFY Identifier: LC_VERIFY (LC : INTEGER) Objective: Verify that the received logical channel is not already in use. Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
(COUNT1 := 1) [LCI_ACTIVE{COUNT1} = LC] [LCI_ACTIVE{COUNT1} = 0] (LCI_ACTIVE{COUNT1} := LC) (COUNT1 := COUNT1 + 1) GOTO LCVR1	LCVR1		F	1 2 3 4
Extended Comments: 1) check if array position COUNT1 has a value assigned that is equal to LC 2) if array position COUNT1 has a value 0 then LC is not in use 3) assign LC to array position COUNT1, return to test case 4) if array position COUNT1 is not 0 and is not equal to LC then increment COUNT1 and check next position NOTE: Used in Multiple Logical Channel tests PLG 27. NOTE: the syntax for arrays used here is not defined in DIS 9646-3. The syntax is array_name { array_position }. The array LCI_ACTIVE is defined in the Test Case Variables table and all entries are initialized to zero.				

Test Step Dynamic Behaviour				
Reference: PACKET/P1_INOPP Identifier: P1_INOPP Objective: Handles the response to INOPPORTUNE packets sent to the IUT while in state P1. Used in test cases 4_301 through 4_310 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR DIAG16 OR #DIAG20)) OR CAUSE_EQ_128] CANCEL !CLEARC ?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG16 OR DIAG20)) OR CAUSE_EQ_128] #CANCEL !RESTARTC		CLR_1 (LCI) CLRC_0 (LCI) STRT_1DTEA STRTC		

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Step Dynamic Behaviour				
Reference: PACKET/P2_INOPP				
Identifier: P2_INOPP				
Objective: Handles the response to inopportune packets sent to the IUT while in state P2.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR DIAG16 OR #DIAG21)) OR CAUSE_EQ_128] CANCEL !CLEARC		CLR_1 (LCI)		
?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG16 OR DIAG21)) OR CAUSE_EQ_128] #CANCEL !RESTARTC		CLRC_0 (LCI) STRT_1DTEA STRTC		
Extended Comments:				
NOTE: Used in test cases 5_301 through 5_308.				

Test Step Dynamic Behaviour				
Reference: PACKET/P2_POSTAMBLE				
Identifier: P2_POSTAMBLE				
Objective: Verify the IUT is in state P2				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
!ACCEPT START TD ?TIMEOUT TD +D1A_UNEXPECTED GOTO P2POL1 +RSTRT_UNEXPECTED ?OTHERWISE CANCEL	P2POL1	ANSR_0 (LCI)	F	

Test Step Dynamic Behaviour				
Reference: PACKET/P2_PREAMBLE Identifier: P2_PREAMBLE Objective: Put the specified channel in DTE Call Request state P2 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<IUT!CALL> START TD ?CALL (LCGN:=CALL.LCGN,LCN:=CALL.LCN) #CANCEL (LC := GET_LCI (LCGN,LCN)) [LC = 0] [(LC >= LTC) AND (LC <= HTC)] [(LC >= LOC) AND (LC <= HOC)] [(LC < LTC) OR (LC > HOC)] ?TIMEOUT TD ?OTHERWISE CANCEL		CALL_1 CALL_1	 2 F F F F	1 3
Extended Comments : 1) the IUT sends a Call Request 2) upon receipt of the Call Request from the IUT, the IUT is assumed to be in state P2 (DTE Call Request), LC is assigned the logical channel contained in the received Call Request 3) verify the logical channel is within the configured range				

Test Step Dynamic Behaviour				
Reference: PACKET/P3_UNEXPECTED				
Identifier: P3_UNEXPECTED				
Objective: Handle unexpected packets received from the IUT while in state P3. Cancel all running timers.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
?RESTART CANCEL !RESTARTC ?ACCEPT CANCEL ?OTHERWISE CANCEL		STRT_1DTEA STRTC ANSR_1 (LCI)	I F F	
Extended Comments:				
1) Receipt of an ACCEPT from the IUT results in a FAIL verdict since the IUT did not remain in state P3 for the specified minimum time.				

Test Step Dynamic Behaviour				
Reference: PACKET/P4_POSTAMBLE				
Identifier: P4_POSTAMBLE				
Objective: Verify the IUT is in state P4. P4_POSTAMBLE leaves the IUT in state R1.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
!CLEAR START TD ?CLEARC CANCEL +R1_POSTAMBLE ?CLEAR CANCEL +R1_POSTAMBLE ?RESTART [RST_ON_ERR_C] CANCEL +GEN2_POSTAMBLE +D1A_UNEXPECTED GOTO P4POL1 +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL	P4POL1	CLR_0 (LCI) CLRC_1 (LCI) CLR_1 (LCI) STRT_1DTEA	 F F	

Test Step Dynamic Behaviour				
Reference: PACKET/P4D1_PREAMBLE				
Identifier: P4D1_PREAMBLE				
Objective: Put the Logical Channel in to the Data Transfer state P4 (D1)				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
[(LC=LTC) OR (LC=LIC)]				
!CLEAR START TD ?CLEARC CANCEL +SUBTREE1		CLR_0 (LCI) CLRC_1 (LCI)		
?CLEAR CANCEL +SUBTREE1		CLR_1 (LCI)		
?RESTART [RST_ON_ERR_C] CANCEL !RESTARTC +SUBTREE1		STRT_1DTEA STRTC		
?TIMEOUT TD ?OTHERWISE CANCEL			F F	
[LC = LOC]				
!CLEAR START TD ?CLEARC CANCEL +SUBTREE2		CLR_0 (LCI) CLRC_1 (LCI)		
?CLEAR CANCEL +SUBTREE2		CLR_1 (LCI)		
?RESTART [RST_ON_ERR_C] CANCEL !RESTARTC +SUBTREE2		STRT_1DTEA STRTC		
?TIMEOUT TD ?OTHERWISE CANCEL			F F	
[LC = LPV]				
!RESET START TD ?RESETC CANCEL ?RESET CANCEL ?RESTART [RST_ON_ERR_R] CANCEL !RESTARTC	P4D1PR	RST_0 (LCI) RSTC_1 (LCI) RST_1 (LCI) STRT_1DTEA STRTC		

[4]

Continued on next page

..... Continued from previous page.

[3]

Behaviour Description	Label	Constraints Reference	V	Comments
<pre> +D1_UNEXPECTED GOTO P4D1PR ?TIMEOUT TD ?OTHERWISE CANCEL SUBTREE1 [D_BIT_SUPP = TRUE] !CALL START TD ?ACCEPT (TEMP := D) CANCEL [TEMP = '1'B] (D_BIT_IN_USE := TRUE) [TEMP = '0'B] ?TIMEOUT TD ?OTHERWISE CANCEL [D_BIT_SUPP = FALSE] !CALL START TD ?ACCEPT (TEMP := D) CANCEL [TEMP = '1'B] (D_BIT_IN_USE := TRUE) [TEMP = '0'B] ?TIMEOUT TD ?OTHERWISE CANCEL SUBTREE2 <IUT!CALL> START TD ?CALL (LCGN:=CALL.LCGN, LCN:=CALL.LCN, TEMP #:=D) CANCEL (LC := GET_LCI (LCGN, LCN)) [((LC >= LTC) AND (LC <= HTC)) OR (#(LC >= LOC) AND (LC <= HOC))] [TEMP = '1'B] </pre>		<pre> CALL_0D (LCI) ANSR_1D (LCI) CALL_0 (LCI) ANSR_1D (LCI) CALL_1 CALL_1 </pre>	<pre> F F F F F F F F </pre>	<pre> 2 </pre>

[7]

Continued on next page

..... Continued from previous page.
[8]

Behaviour Description	Label	Constraints Reference	V	Comments
!ACCEPT (D_BIT_IN_USE:=TRUE)		ANSR_0D(LCI)		2
[TEMP = '0'B]				
!ACCEPT		ANSR_0(LCI)		
[(LC < LTC) OR (LC > HOC)]			F	1
?TIMEOUT TD			F	
?OTHERWISE CANCEL			F	
Extended Comments:				
1) the logical channel is not within the configured range as specified in the PIXIT question 1.2				
2) IUT is in state P4				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Step Dynamic Behaviour				
Reference: PACKET/P4D1_PREAMBLE_A				
Identifier: P4D1_PREAMBLE_A				
Objective: Put the Logical Channel in to the Data Transfer state P4 (D1), but do not negotiate use of Delivery Confirmation				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
[(LC=LTC) OR (LC=LIC)]				
!CLEAR START TD ?CLEARC CANCEL +SUBTREE1		CLR_0 (LCI) CLRC_1 (LCI)		
?CLEAR CANCEL +SUBTREE1		CLR_1 (LCI)		
?RESTART [RST_ON_ERR_C] CANCEL !RESTARTC +SUBTREE1		STRT_1DTEA STRTC		
?TIMEOUT TD ?OTHERWISE CANCEL			F F	
[LC = LOC]				
!CLEAR START TD ?CLEARC CANCEL +SUBTREE2		CLR_0 (LCI) CLRC_1 (LCI)		
?CLEAR CANCEL +SUBTREE2		CLR_1 (LCI)		
?RESTART [RST_ON_ERR_C] CANCEL !RESTARTC +SUBTREE2		STRT_1DTEA STRTC		
?TIMEOUT TD ?OTHERWISE CANCEL			F F	
[LC = LPV]				
!RESET START TD ?RESETC CANCEL	P4D1PR A	RST_0 (LCI) RSTC_1 (LCI)		
# ?RESET CANCEL		RST_1 (LCI)		

[3]

Continued on next page

..... Continued from previous page.

[4]

Behaviour Description	Label	Constraints Reference	V	Comments
<pre>?RESTART [RST_ON_ERR_R] CANCEL !RESTARTC +D1_UNEXPECTED GOTO P4D1PRA ?TIMEOUT TD ?OTHERWISE CANCEL SUBTREE1 !CALL START TD ?ACCEPT (TEMP := D) CANCEL [TEMP = '1'B] (D_BIT_IN_USE := TRUE) [TEMP = '0'B] ?TIMEOUT TD ?OTHERWISE CANCEL SUBTREE2 <IUT!CALL> START TD ?CALL (LCGN:=CALL.LCGN,LCN:=CALL.LCN) #CANCEL (LC := GET_LCI (LCGN,LCN)) [((LC>=LTC) AND (LC<=HTC)) OR (#(LC>=LOC) AND (LC<= HOC))] !ACCEPT [(LC < LTC) OR (LC > HOC)] ?TIMEOUT TD ?OTHERWISE CANCEL</pre>		<pre>STRT_1DTEA STRTC CALL_0(LCI) ANSR_1D(LCI) CALL_1 CALL_1 ANSR_0(LCI)</pre>	<pre>F F F F F F F F F F</pre>	

STANDARDS50.COM Click to view the full PDF of ISO/IEC 8882-3:1991

Test Step Dynamic Behaviour				
Reference: PACKET/P5_INOPP				
Identifier: P5_INOPP				
Objective: Handles the response to inopportune packets sent to the IUT while in state P5.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
?CLEAR [(CAUSE_EQ_0 AND (DIAG0 OR DIAG16 OR #DIAG24)) OR CAUSE_EQ_128] CANCEL !CLEARC		CLR_1 (LCI) CLRC_0 (LCI)		1
?RESTART [RST_ON_ERR_C] [(CAUSE_EQ_0 AND #(DIAG0 OR DIAG16 OR DIAG24)) OR CAUSE_EQ_128] #CANCEL !RESTARTC		STRT_1DTEA STRTC		
Extended Comments:				
1) no information, packet type invalid, invalid for P5				
NOTE: Used in test cases P8_301 through P8_310.				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Step Dynamic Behaviour				
Reference: PACKET/P5_PREAMBLE Identifier: P5_PREAMBLE Objective: Put the IUT in the Call Collision state P5 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
<pre> <IUT!CALL> START TD ?CALL (LCGN:=CALL.LCGN, LCN:=CALL.LCN) #CANCEL (LC := GET_LCI (LCGN, LCN)) [LC = 0] [((LC>=LTC) AND (LC<=HTC)) OR (#(LC>=LOC) AND (LC<=HOC))] !CALL START TD_RESP ?TIMEOUT TD_RESP +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?OTHERWISE CANCEL [(LC < LTC) OR (LC > HOC)] +CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL </pre>		<p>CALL_1</p> <p>CALL_1</p> <p>CALL_0 (LCI)</p>	<p>F</p> <p>F</p> <p>F</p> <p>F</p>	<p>1</p> <p>2</p>
Extended Comments : 1) no response, assume the IUT is now in state P5, continue 2) LCN out of range				

Test Step Dynamic Behaviour				
Reference: PACKET/P6_POSTAMBLE				
Identifier: P6_POSTAMBLE				
Objective: Verify the IUT is in state P6 after the test body has successfully completed				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
!CLEARC START TD ?TIMEOUT TD ?CLEAR GOTO P6POL1 ?OTHERWISE CANCEL	P6POL1	CLRC_0 (LCI) CLR_1 (LCI)	 F	1 2
Extended Comments:				
1) no response is okay				
2) CLEAR may arrive due to the expiry of the T21 timer in the IUT				

Test Step Dynamic Behaviour				
Reference: PACKET/P6_PREAMBLE				
Identifier: P6_PREAMBLE				
Objective: Put the channel (LCI) in state P6 DTE Clear Request				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
!CLEARC START TD ?CLEAR CANCEL +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL		CLRC_0 (LCI) CLR_1 (LCI)	 F F	1
Extended Comments:				
1) IUT is now in state P6 DTE Clear Request				

Test Step Dynamic Behaviour				
Reference: PACKET/P7_UNEXPECTED				
Identifier: P7_UNEXPECTED				
Objective: Handles any unexpected responses from the IUT immediately after the IUT has been put in state P7.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
?CLEAR CANCEL		CLR_1 (LCI)	I	
?RESTART CANCEL !RESTARTC		STRT_1DTEA STRTC	I	
?CLEARC CANCEL ?OTHERWISE CANCEL		CLRC_1 (LCI)	F F	
Extended Comments :				
1) Receipt of a Clear Confirmation results in a FAIL verdict since the IUT did not remain in state P7 for the specified minumum time.				

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

..... Continued from previous page.
[6]

Behaviour Description	Label	Constraints Reference	V	Comments
?TIMEOUT TR ?OTHERWISE GOTO R1POL5	R1POL5			
+D1A_UNEXPECTED GOTO R1POL6				
?TIMEOUT TD ?OTHERWISE CANCEL			F F	

Test Step Dynamic Behaviour				
Reference: PACKET/R1_PREAMBLE				
Identifier: R1_PREAMBLE (TYPE : INTEGER)				
Objective: Put the IUT into state R1 Ready and assign a logical channel to the Test Case variable LC based on the type of logical channel requested in the "type" parameter.				
Default :				
Behaviour Description	Label	Constraints Reference	V	Comments
(FIRST_TEST := FALSE) +INITDTE +ASSIGN_DCE (TYPE)				1
Extended Comments :				
1) The subtree INITDTE is executed once at the start of a series of test cases, or when a test case is to be executed in isolation. INITDTE shall also be executed at the start of a test case where the previous test case resulted in a fail verdict. INITDTE shall be executed with every test case contained in Packet Level Groups 1, 2, 3 and 26.				

Test Step Dynamic Behaviour				
Reference: PACKET/R2_POSTAMBLE Identifier: R2_POSTAMBLE Objective: For test cases that leave the IUT in state R2 after the test body has completed R2_POSTAMBLE, will move the IUT to the stable state R1 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
!RESTARTC START TD ?TIMEOUT TD		STRTC		
?RESTART !RESTARTC		STRT_1DTEA STRTC	I F	
?OTHERWISE CANCEL				

Test Step Dynamic Behaviour				
Reference: PACKET/R2_PREAMBLE Identifier: R2_PREAMBLE Objective: Put the IUT into state R2 Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
!RESTARTC START TD ?RESTART CANCEL ?TIMEOUT TD ?OTHERWISE CANCEL		STRTC STRT_1DTEA	F F	continue

Test Step Dynamic Behaviour				
Reference: PACKET/R3_UNEXPECTED Identifier: R3_UNEXPECTED Objective: Handle unexpected packets from the IUT received while the IUT is in state R3 (DXE Restart Request). Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
?RESTART CANCEL		STRT_1DTEA	I	
?RESTARTC CANCEL ?OTHERWISE CANCEL		STRTC_1	F F	

Test Step Dynamic Behaviour				
Reference: PACKET/RSET_UNEXPECTED Identifier: RSET_UNEXPECTED Objective: Handle an unexpected Reset packet Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
?RESET !RESETC		RST_1 (LCI) RSTC_0 (LCI)	I	

Test Step Dynamic Behaviour				
Reference: PACKET/RSTRT_UNEXPECTED Identifier: RSTRT_UNEXPECTED Objective: An unexpected Restart Request will be responded to with a Restart Confirmation and the test case will give an Inconclusive verdict Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
?RESTART CANCEL !RESTARTC		STRT_1DTEA STRTC	I	

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Step Dynamic Behaviour				
Reference: PACKET/RX_DATA				
Identifier: RX_DATA				
Objective: Wait for one or more Data packets to arrive from the IUT or the expiration of timer TD, discard any RR's received before the Data packet arrives				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
START TD (2*TD_RESPONSE)				
?DATA PR_VERIFY PR_UPDATE PT_UPDATE1 # GOTO RXDAL1	RXDAL1	DAT_1A(LCI, PR)		2
?RR PT_UPDATE2 GOTO RXDAL1		RR_1(LCI)		2
+RX_INTERRUPT !INTC GOTO RXDAL1		INTC_0(LCI)		
?RNR PT_UPDATE3 CANCEL		RNR_1(LCI)	I	1
?REJ [REJ_SUPP] PT_UPDATE4 CANCEL		REJ_1A(LCI)	I	1
?RESET CANCEL !RESETC		RST_1(LCI) RSTC_0(LCI)	I	1
+CLR_UNEXPECTED +RSTRT_UNEXPECTED ?TIMEOUT TD ?OTHERWISE CANCEL				3
Extended Comments:				
1) unexpected but valid packets				
2) verify that the IUT is acknowledging only packets transmitted				
3) continue				

Test Step Dynamic Behaviour				
Reference: PACKET/RX_INTERRUPT				
Identifier: RX_INTERRUPT				
Objective: Receive an Interrupt packet of length 1 to 32 octets based on type of IUT				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
?INT		INT_A1 (LCI)		
?INT		INT_A2 (LCI)		
[CCITT_80]			F	
?INT		INT_A3 (LCI)		
[CCITT_80]			F	
?INT		INT_A4 (LCI)		
[CCITT_80]			F	
?INT		INT_A5 (LCI)		
[CCITT_80]			F	
?INT		INT_A6 (LCI)		
[CCITT_80]			F	
?INT		INT_A7 (LCI)		
[CCITT_80]			F	
?INT		INT_A8 (LCI)		
[CCITT_80]			F	
?INT		INT_A9 (LCI)		
[CCITT_80]			F	
?INT		INT_A10 (LCI)		
[CCITT_80]			F	
?INT		INT_A11 (LCI)		
[CCITT_80]			F	
?INT		INT_A12 (LCI)		
[CCITT_80]			F	
?INT		INT_A13 (LCI)		
[CCITT_80]			F	
?INT		INT_A14 (LCI)		
[CCITT_80]			F	
?INT		INT_A15 (LCI)		
[CCITT_80]			F	
?INT		INT_A16 (LCI)		
[CCITT_80]			F	
?INT		INT_A17 (LCI)		
[CCITT_80]			F	
?INT		INT_A18 (LCI)		
[CCITT_80]			F	
?INT		INT_A19 (LCI)		
[CCITT_80]			F	

[2]

Continued on next page

..... Continued from previous page. [1]

Behaviour Description	Label	Constraints Reference	V	Comments
?INT [CCITT_80]		INT_A20 (LCI)	F	
?INT [CCITT_80]		INT_A21 (LCI)	F	
?INT [CCITT_80]		INT_A22 (LCI)	F	
?INT [CCITT_80]		INT_A23 (LCI)	F	
?INT [CCITT_80]		INT_A24 (LCI)	F	
?INT [CCITT_80]		INT_A25 (LCI)	F	
?INT [CCITT_80]		INT_A26 (LCI)	F	
?INT [CCITT_80]		INT_A27 (LCI)	F	
?INT [CCITT_80]		INT_A28 (LCI)	F	
?INT [CCITT_80]		INT_A29 (LCI)	F	
?INT [CCITT_80]		INT_A30 (LCI)	F	
?INT [CCITT_80]		INT_A31 (LCI)	F	
?INT [CCITT_80]		INT_A32 (LCI)	F	

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Test Step Dynamic Behaviour				
Reference: PACKET/TX_DATA				
Identifier: TX_DATA (I : INTEGER)				
Objective: Transmit a Data packet to the IUT				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
[I = 0] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		D_0 (LCI)		
[I = 1] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		D_1 (LCI)		
[I = 2] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		D_2 (LCI)		
[I = 3] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		D_3 (LCI)		
[I = 4] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		D_4 (LCI)		
[I = 5] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		D_5 (LCI)		
[I = 6] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		D_6 (LCI)		
[I = 7] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		D_7 (LCI)		
[I = 8] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		D_8 (LCI)		
[I > 8] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		D_U (LCI)		

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Step Dynamic Behaviour				
Reference: PACKET/TX_DATA_EMPTY				
Identifier: TX_DATA_EMPTY (I : INTEGER)				
Objective: Transmit a Data packet to the IUT				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
[I = 0] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DE0 (LCI)		
[I = 1] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DE1 (LCI)		
[I = 2] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DE2 (LCI)		
[I = 3] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DE3 (LCI)		
[I = 4] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DE4 (LCI)		
[I = 5] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DE5 (LCI)		
[I = 6] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DE6 (LCI)		
[I = 7] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DE7 (LCI)		
[I = 8] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DE8 (LCI)		
[I > 8] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		D_U (LCI)		

STANDARDSISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Step Dynamic Behaviour				
Reference: PACKET/TX_DATA_MBIT				
Identifier: TX_DATA_MBIT (I : INTEGER)				
Objective: Transmit a Data packet to the IUT from the user supplied Data packets for testing M-bit support; PIXIT question 2.15				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
[I = 0] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DM_0 (LCI)		
[I = 1] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DM_1 (LCI)		
[I = 2] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DM_2 (LCI)		
[I = 3] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DM_3 (LCI)		
[I = 4] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DM_4 (LCI)		
[I = 5] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DM_5 (LCI)		
[I = 6] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DM_6 (LCI)		
[I = 7] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DM_7 (LCI)		
[I = 8] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DM_8 (LCI)		
[I > 8] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		D_U (LCI)		

Test Step Dynamic Behaviour				
Reference: PACKET/TX_DATA_NOACK				
Identifier: TX_DATA_NOACK (I : INTEGER)				
Objective: Transmit a Data packet to the IUT but do not acknowledge any received data packets.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
[I = 0] !DATA (DATA.PS:=PS, DATA.PR:=0) PS_UPDATE		D_0 (LCI)		
[I = 1] !DATA (DATA.PS:=PS, DATA.PR:=0) PS_UPDATE		D_1 (LCI)		
[I = 2] !DATA (DATA.PS:=PS, DATA.PR:=0) PS_UPDATE		D_2 (LCI)		
[I = 3] !DATA (DATA.PS:=PS, DATA.PR:=0) PS_UPDATE		D_3 (LCI)		
[I = 4] !DATA (DATA.PS:=PS, DATA.PR:=0) PS_UPDATE		D_4 (LCI)		
[I = 5] !DATA (DATA.PS:=PS, DATA.PR:=0) PS_UPDATE		D_5 (LCI)		
[I = 6] !DATA (DATA.PS:=PS, DATA.PR:=0) PS_UPDATE		D_6 (LCI)		
[I = 7] !DATA (DATA.PS:=PS, DATA.PR:=0) PS_UPDATE		D_7 (LCI)		
[I = 8] !DATA (DATA.PS:=PS, DATA.PR:=0) PS_UPDATE		D_8 (LCI)		
[I > 8] !DATA (DATA.PS:=PS, DATA.PR:=0) PS_UPDATE		D_U (LCI)		
Extended Comments: Used in test case P22_101				

STANDARD ISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Step Dynamic Behaviour				
Reference: PACKET/TX_DATA_QBIT				
Identifier: TX_DATA_QBIT (I : INTEGER)				
Objective: Transmit a Data packet to the IUT from the user supplied Data packets for testing Q-bit error handling.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
[I = 0] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DQ_0 (LCI)		
[I = 1] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DQ_1 (LCI)		
[I = 2] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DQ_2 (LCI)		
[I = 3] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DQ_3 (LCI)		
[I = 4] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DQ_4 (LCI)		
[I = 5] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DQ_5 (LCI)		
[I = 6] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DQ_6 (LCI)		
[I = 7] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DQ_7 (LCI)		
[I = 8] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DQ_8 (LCI)		
[I > 8] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		D_U (LCI)		
Extended Comments: See PIXIT 2.15				

STANDARDSPISO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

Test Step Dynamic Behaviour				
Reference: PACKET/TX_DATA_QBIT_A				
Identifier: TX_DATA_QBIT_A (I : INTEGER)				
Objective: Transmit a Data packet to the IUT from the user supplied Data packets for testing Q-bit support.				
Default:				
Behaviour Description	Label	Constraints Reference	V	Comments
[I = 0] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DQ_0A (LCI)		
[I = 1] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DQ_1A (LCI)		
[I = 2] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DQ_2A (LCI)		
[I = 3] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DQ_3A (LCI)		
[I = 4] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DQ_4A (LCI)		
[I = 5] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DQ_5A (LCI)		
[I = 6] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DQ_6A (LCI)		
[I = 7] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DQ_7A (LCI)		
[I = 8] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		DQ_8A (LCI)		
[I > 8] !DATA (DATA.PS:=PS, DATA.PR:=PR) PS_UPDATE		D_U (LCI)		
Extended Comments: See PIXIT question 2.15 .				

STANDARDSPSO.COM: Click to view the full PDF of ISO/IEC 8882-3:1991

8 Use of the PICS and PIXIT based abstract test selection rules

The cross reference table defines the relationship between each test case and the PICS and PIXIT items. Only the optional PICS/PIXIT items which have a relation to at least one test case are referenced in the table. The cross reference table is used in conjunction with a completed PICS and PIXIT to determine a set of test cases that will be run against an IUT. The first column of the cross reference table contains the text or an abbreviation of the text of the corresponding PICS or PIXIT item from ISO/IEC 8208/Amd. 3 or 6.11, table 2. The second column contains the number of the PICS or PIXIT item. The third column contains the status of the PICS item. The fourth column indicates if the PICS or PIXIT item is applicable for CCITT X.25 1980 (X.25 '80), CCITT X.25 1984 (X.25 '84), ISO 8208 (ISO 8208) or all DTE packet layer standards (ALL). The fifth column indicates if the PICS or PIXIT item is applicable to IUTs providing VC service (VC) or IUTs providing PVC service (PVC) or all IUTs (VC/PVC).

The relationship between a test case and an item is shown by a "-", "+", "k" or blank at the intersection of the row and column. These symbols are defined as meaning

- the test case will not be selected if an IUT supports this item. (e.g. PVC: no address or facility tests will be performed);
- + the test case will not be selected if an IUT does not support this item. (e.g. the tests of PLG 3 are not executable if the IUT does not support "State r3 observable");
- k the test case will not be selected if none of the corresponding PICS and PIXIT items will be supported by the IUT. The k's which belong together are identified by the same number k(n) to ease the recognition of the relations between multiple PICS and PIXIT items;
- blank no direct relationship to the PICS/PIXIT item, the test case is selected.

The contents of the cross reference table 5 is fixed.

To find the set of test cases for an IUT, first the set of applicable Packet Layer Groups must be determined based on the type of service provided by the IUT, see 8.1. Then using the corresponding cross reference table for each Packet Layer Group (see table 5) the completed PICS and PIXIT proforma is compared to the cross

reference table contents following the four steps below:

1. each test which has one or more "-"s in its column will be **deselected** if the IUT **supports** one or more of the corresponding PICS and PIXIT items (rows);
2. each test which has one or more "+"s in its column will be **deselected** if the IUT **does not support** one or more of the corresponding PICS and PIXIT items (rows);
3. each of the remaining tests that has one or more "k"s in its column will be **deselected** if the IUT **does not support** at least one of the corresponding PICS and PIXIT items (rows);
4. all tests which have no character in their column will be **selected** unconditionally.

8.1 Packet layer group selection based on service

For IUTs providing only PVC service (Section 1: item Vp of ISO/IEC 8208/Amd. 3) the following list of packet layer groups are to be applied, subject to further test case selection based on the tables for these packet layer groups contained in table 5. All other packet layer groups not listed below are deselected.

Applicable PLGs for PVC service only IUTs:

- PLG 1: State R1 Packet Layer Ready
- PLG 2: State R2 DTE Restart Request
- PLG 3: State R3 DXE Restart Request
- PLG 11: State D1 Flow Control Ready
- PLG 12: State D2 DTE Reset Request
- PLG 13: State D3 DXE Reset Indication
- PLG 14: State I1 DTE Interrupt Ready
- PLG 15: State I2 DTE Interrupt Sent
- PLG 16: State J1 DXE Interrupt Ready
- PLG 17: State J2 DXE Interrupt Sent
- PLG 18: State F1 DXE Receive Ready
- PLG 19: State F2 DXE Receive Not Ready
- PLG 20: State G1 DTE Receive Ready
- PLG 22: Window Filling & Rotation, Remote Busy, M-bit
- PLG 23: Timer Tests (excluding 23_102, and 23_105)
- PLG 26: Registration Tests

For IUTs providing only VC service (Section 1: item Vs of ISO/IEC 8208/Amd. 3) or VC and PVC service all Packet Layer Groups apply, subject to further test case selection based on the tables for these packet layer groups contained in table 5.

Table 5: PICS and PIXIT based Abstract Test Selection Rules
Packet Layer Group 1: State R1 Packet Level Ready

PICS item from IS 8208/AD3
 Description Number Status Standard LC P1_206 P1_207 P1_208

Section 1. General DTE Characteristics

DTE/DCE (1980)	Ec/0	O.2	X.25 '80	-	-	-
DTE/DCE (1984)	Ec/4	O.2	X.25 '84	-	-	-
ISO 8208	N1 - N4		ISO 8208			
Modulo 8	M8	O.3	ALL			
Modulo 128	M128	O.3	ALL			

Section 2. Procedures, packet types and packet formats

On-line Fac. Reg. tx	Z4i	O	ALL			VC/PVC
On-line Fac. Reg. rx	Z4r	O	ALL			VC/PVC
Outgoing VCs	S1	Vs::O	ALL			VC
Fast-Select no restriction	S1a	O	ALL			VC
Fast-Select with restrict.	S1b	O	ALL			VC
Incoming VCs	S2	Vs::O	ALL			VC
Fast-Select with accept.	S2a	O	ALL			VC
non-Fast Select cleared	S2d	O	ALL			VC
Resetting supported tx	RSi	O	ALL			VC/PVC
Resetting supported rx	RSr	O	ALL			VC/PVC
ERROR-C proc. clear	W1	O	ALL			VC
ERROR-C proc. restart	W1	O	ALL			VC
ERROR-R proc. reset	W2s	O.8	ALL			VC
ERROR-R proc. clear	W2s	O.8	ALL			VC

STANDARDSDISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991

Packet Layer Group 1: State R1 Packet Level Ready

PICS item from IS 8208/AD3
 Description Number Status Applicable Standard Type of LC P1_206 P1_207 P1_208

Section 2 : (Continued)

ERROR-R proc. restart	W2s	O.8	ALL	VC
ERROR-R proc. reset	W2p	O.9	ALL	PVC
ERROR-R proc. restart	W2p	O.9	ALL	PVC
Sending Interrupts	Is	O	ALL	VC/PVC
Receiving Interrupts	Ir	O	ALL	VC/PVC
Sending Data packets	DS1	O	ALL	VC/PVC
Receives REJ packets	DS6	Et-O	ALL	VC/PVC
Receiving Data Packets	DR1	O	ALL	VC/PVC
Sends RNR packets	DR3	O	ALL	VC/PVC
Sends REJ packets	DR6	O	ALL	VC/PVC

Section 3. Miscellaneous features and options

R3 observable	O1	O	ALL	VC/PVC
P3 observable	O2	O	ALL	VC/PVC
P7 observable	O3	O	ALL	VC/PVC
D3 observable	O4	O	ALL	VC/PVC
J2 observable	O5	O	ALL	VC/PVC

STANDARDSISO.COM. Click to view the full PDF of ISO/IEC 8882-3:1991

Packet Layer Group 1: State R1 Packet Level Ready

PICS item from IS 8208/AD3
 Description Number Status Standard LC P1_206 P1_207 P1_208
 Applicable Type of

Section 4. Facilities and registration-facilities

Window size negotiation	FS1	0	ALL	VC
Throughput Class neg	FS2	0	ALL	VC
CUG outgoing basic	FS4b	0	ALL	VC
Packet size negotiation	FR1	0	ALL	VC
Window size negotiation	FR1	0	ALL	VC
Throughput Class neg	FR2	0	ALL	VC
CUG selection basic	FR3b	0	ALL	VC
CUG selection extended	FR3e	0	ALL	VC
CUG outgoing extended	FR4e	0	ALL	VC
Bilateral CUG selection	FR5	0	ALL	VC
Reverse Charging	FR6b	0	ALL	VC
Transit Delay Selection	FR12	0	ALL	VC

Section 5. Parameter Values and Ranges

T24 Window Status	T24	0	ISO 8208	VC/PVC
T25 Window Rotation	T25	0	ISO 8208	VC/PVC

Packet Layer Group 2: State R2 DTE Restart Request

PICS item from IS 8208/AD3
 Description Number Status Standard Applicable Type of LC P2_210 P2_211 P2_212

Section 1. General DTE Characteristics

DTE/DCE (1980)	Ec/0	O.2	X.25 '80	-	-	-
DTE/DCE (1984)	Ec/4	O.2	X.25 '84	-	-	-
ISO 8208	M8	O.3	ALL			
Modulo 8	M128	O.3	ALL			

Section 2. Procedures, packet types and packet formats

On-line Fac. Reg. tx	Z4i	O	ALL			VC/PVC
On-line Fac. Reg. rx	Z4r	O	ALL			VC/PVC
Outgoing VCs	S1	Vs::O	ALL			VC
Fast-Select no restriction	S1a	O	ALL			VC
Fast-Select with restrict.	S1b	O	ALL			VC
Incoming VCs	S2	Vs::O	ALL			VC
Fast-Select with accept.	S2a	O	ALL			VC
non-Fast Select cleared	S2d	O	ALL			VC
Resetting supported tx	RSi	O	ALL			VC/PVC
Resetting supported rx	RSr	O	ALL			VC/PVC
ERROR-C proc. clear	W1	O	ALL			VC
ERROR-C proc. restart	W1	O	ALL			VC
ERROR-R proc. reset	W2s	O.8	ALL			VC
ERROR-R proc. clear	W2s	O.8	ALL			VC

STANDARD.PSISO.COM : Click to view the full PDF of ISO/IEC 8882-3:1991