

# INTERNATIONAL STANDARD

**ISO  
4040**

Third edition  
1997-06-01

---

---

## Passenger cars — Location of hand controls, indicators and tell-tales

*Voitures particulières — Emplacement des commandes manuelles, des  
indicateurs et des témoins*



Reference number  
ISO 4040:1997(E)

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 4040 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 13, *Ergonomics applicable to road vehicles*.

This third edition cancels and replaces the second edition (ISO 4040:1983), which has been technically revised.

STANDARDSISO.COM : Click to view the full PDF of ISO 4040:1997

© ISO 1997

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization  
Case postale 56 • CH-1211 Genève 20 • Switzerland  
Internet central@iso.ch  
X.400 c=ch; a=400net; p=iso; o=isocs; s=central

Printed in Switzerland

## Introduction

There is a recognized potential for errors in the selection of controls essential to the safe operation of a vehicle if these controls are not similarly located in all vehicles. Therefore the standardization of these control locations must be considered a logical and beneficial design objective since drivers have an ever-increasing opportunity to change from one vehicle to another.

STANDARDSISO.COM : Click to view the full PDF of ISO 4040:1997

This page intentionally left blank

STANDARDSISO.COM : Click to view the full PDF of ISO 4040:1997

# Passenger cars — Location of hand controls, indicators and tell-tales

## 1 Scope

This International Standard lays down the location of the controls in road vehicles, by subdividing the space within reach of drivers into specific zones to which certain controls essential to the safe operation of vehicles are assigned.

It also specifies certain combinations of functions for multifunction controls and the degree to which certain indicators and tell-tales shall be visible.

A specification for a control, indicator or tell-tale does not imply that the item must be fitted.

This International Standard applies to hand-operated controls, to indicators, and to tell-tales for left and right-hand drive passenger cars as defined in ISO 3833.

## 2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 2575:1995, *Road vehicles — Symbols for controls, indicators and tell-tales.*

ISO 3833:1977, *Road vehicles — Types — Terms and definitions.*

ISO 3958:1996, *Passenger cars — Driver hand-control reach.*

ISO 4513:1978, *Road vehicles — Visibility — Method for establishment of eyellipses for driver's eye location.*

ISO 6549:—<sup>1)</sup>, *Road vehicles — Procedure for H-point determination.*

## 3 Definitions

For the purposes of this International Standard, the following definitions apply.

**3.1 reference plane:** Vertical plane parallel to the longitudinal axis of the car within a zone 50 mm to either side of the centre of the designated seating position for the driver at the R-point as defined in ISO 6549.

1) To be published. (Revision of ISO 6549:1980)

**3.2 operational area of a control:** Area swept by those parts of a control which are activated by the hand while the possible modes or positions are selected in the manner intended by the designer. (See figure 1, for example.)

**3.3 display area of an indicator or tell-tales:** Area which includes the identification of the quantity displayed and those portions required to determine its level at any point within the usable capacity of the instrumentation. It need not include, for example, bezels or the manufacturer's type number. (See figure 2, for example.)

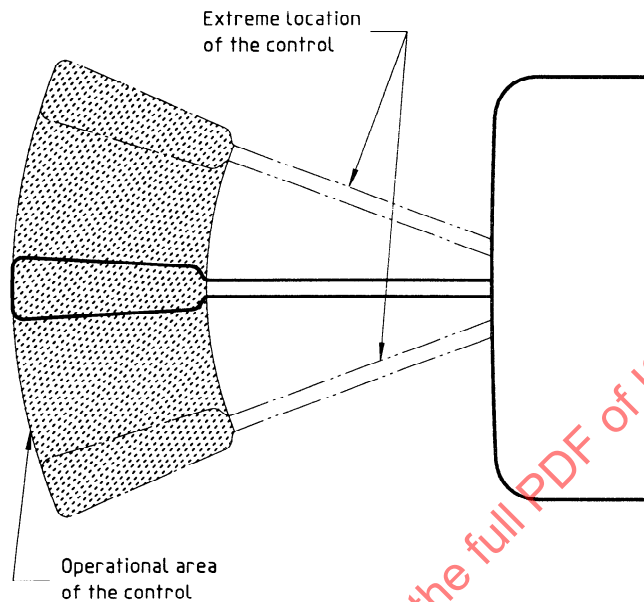


Figure 1 — Example of operational area of a control

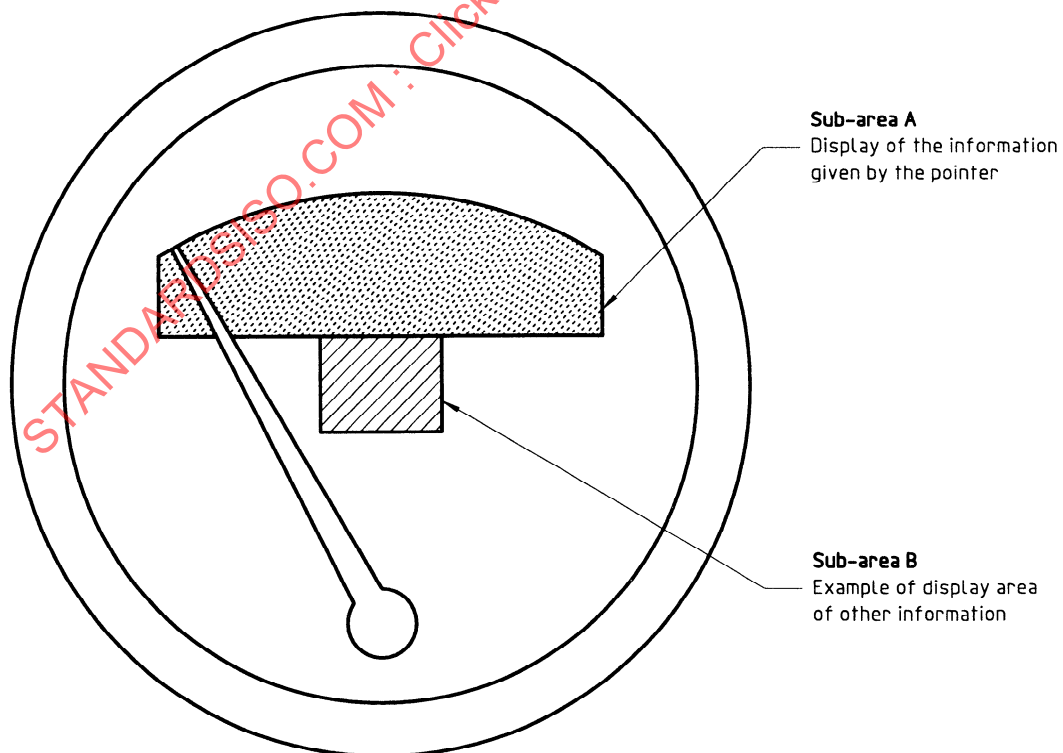


Figure 2 — Example of display area of indicators

**3.4 steering-wheel plane:** Plane passing through the upper surface of the steering-wheel rim in the design condition, as designated by the vehicle manufacturer, and with the vehicle wheels in the straight-ahead position.

**3.5 steering-wheel axis:** Line at right angles to the steering-wheel plane, passing through the centre of rotation of the steering-wheel rim.

**3.6 zone one:** Volume to the left of the reference plane bounded by the following surfaces (see figure 3):

- a plane parallel to the steering-wheel plane and 20 mm above it;
- a plane parallel to the steering-wheel plane and 170 mm below it;
- a cylinder which extends 100 mm beyond the periphery of the steering-wheel rim and whose axis is on the steering-wheel axis;
- a cylinder which lies 130 mm inside the periphery of the steering-wheel rim, and whose axis is on the steering-wheel axis;
- two planes which intersect along the steering-wheel axis, and whose intersections with the steering-wheel plane are at 40° and 130° from the reference plane.

**3.7 zone two:** Volume bounded by the following surfaces (see figure 3):

- a plane parallel to the steering-wheel plane and 20 mm above it;
- a plane parallel to the steering-wheel plane and 170 mm below it;
- a cylinder of 50 mm radius whose axis is on the steering-wheel axis.

**3.8 zone three:** Volume to the right of the reference plane bounded by the following surfaces (see figure 3):

- a plane parallel to the steering-wheel plane and 20 mm above it;
- a plane parallel to the steering-wheel plane and 170 mm below it;
- a cylinder which extends 100 mm beyond the periphery of the steering-wheel rim and whose axis is on the steering-wheel axis;
- a cylinder which lies 130 mm inside the periphery of the steering-wheel rim and whose axis is on the steering-wheel axis;
- two planes which intersect along the steering-wheel axis and whose intersections with the steering-wheel plane are at 40° and 130° from the reference plane.

**3.9 visible:** Seen with one eye or the other, not necessarily both eyes simultaneously, from all positions within the 95th percentile eyellipses (see ISO 4513) with the gear selector in top gear or drive position and the steering-wheel in the straight-ahead position.

**3.10 head movement:** Movement required to overcome a geometric obstruction. (For the purposes of this International Standard, it does not include the movement when the target is more than 30° from the line of sight.)

**3.11 identification:** Symbol, written label, or some portion of the pointer and scale by which a driver can distinguish the characteristic displayed by the control, the indicator, or the tell-tale.

**3.12 passive restraint readiness indicator:** Tell-tale or indicator which indicates a malfunction that will prevent or impede the operation of a passive restraint in the designed manner.

Dimensions in millimetres

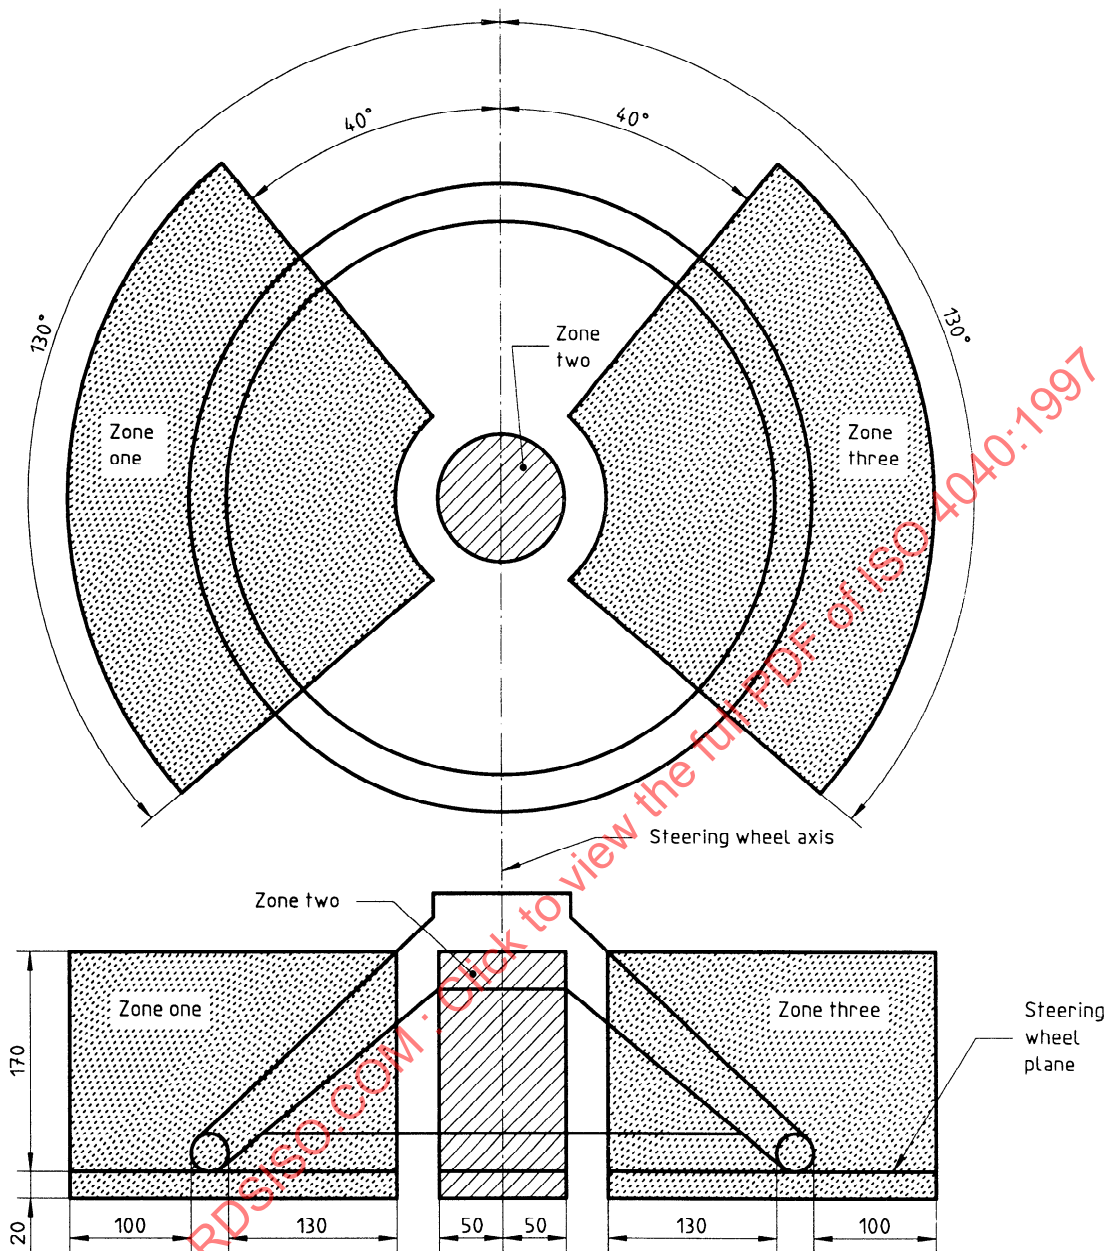


Figure 3 — Location of zones

**3.13 stalk control:** Rigid, elongated control device with a visible length at least five times as great as the least cross-sectional dimension. This device may be fixed or movable and located on the steering column or instrument panel. The operational area is located within the restrained reach of the driver (see ISO 3958).


**3.14 touch control:** Control requiring minimal displacement to operate.

**3.15 proximity control:** Control which requires no displacement to operate.

**3.16 operational surface:** Interface (of the knob, lever, button, etc.) used to activate a control system.

**3.17 secondary operational surface:** Operational surface mounted on, and external to, another operational surface. This does not include buttons on the end of a stalk control. (See figure 4.)



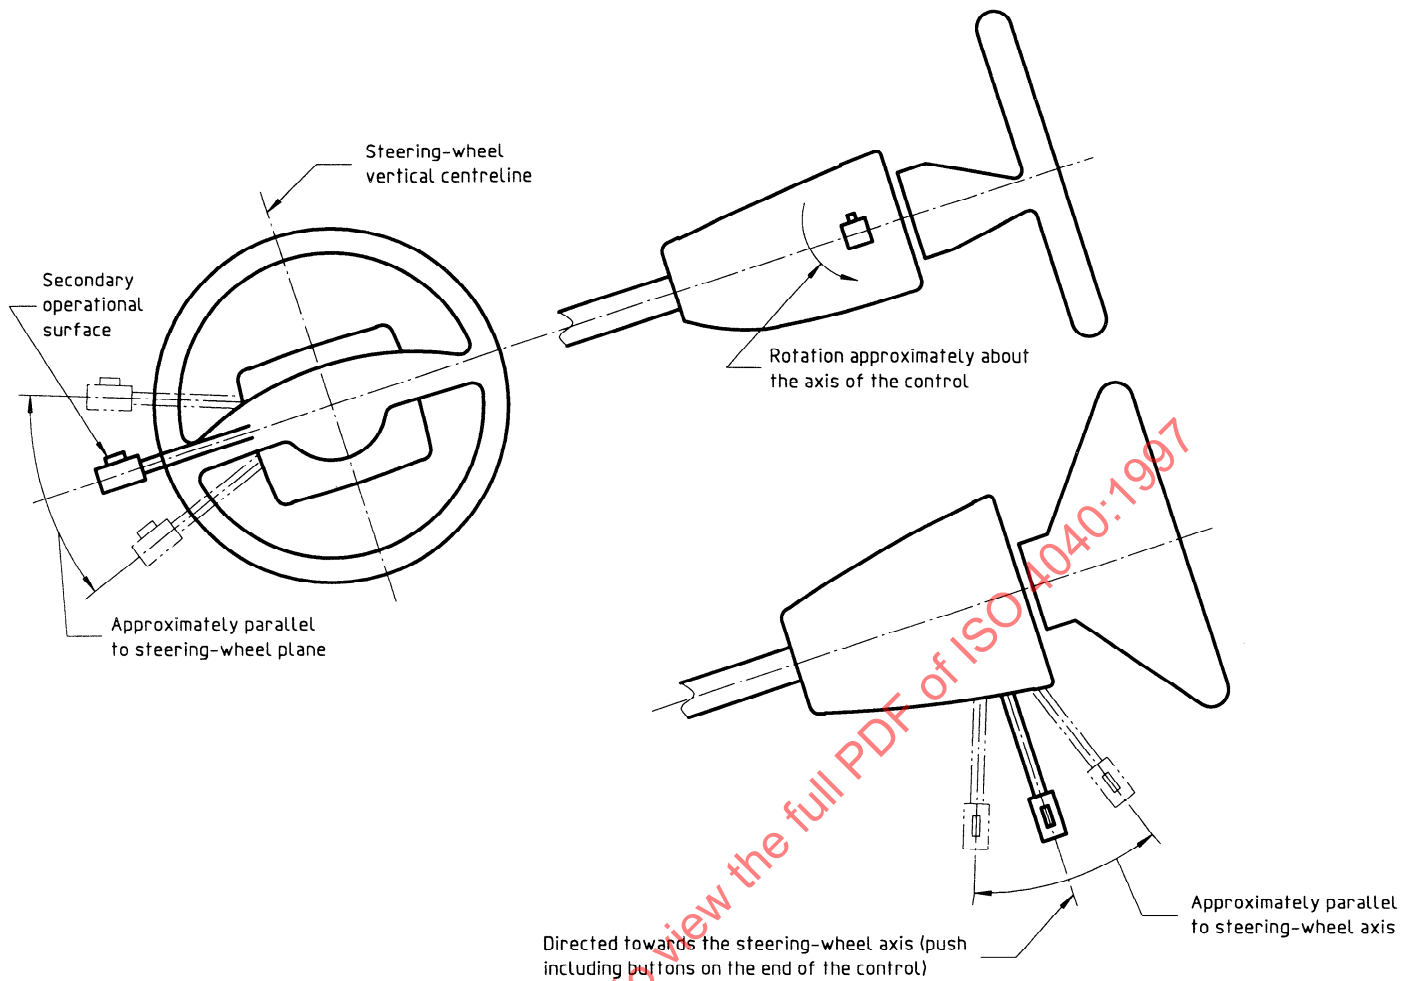

**Figure 4 — Modes of operation for stalk controls**

## 4 Requirements for location of controls

**4.1** The controls listed in subclauses 4.2 to 4.9 shall be within the restrained reach of drivers as defined in ISO 3958.

**4.2** The operational areas of the following controls shall be located in zone one:

- headlights beam switching;
- headlights optical warning;
- turn signal direction indicator.

**4.3** The operational area of the following controls shall be located to the left of the reference plane:

- master lighting control (left-hand drive only);
- hand-operated parking brake (right-hand drive only).

**4.4** A portion of the operational area of a control for the audible warning (horn) shall be located either in zone one or in zone two.

Additional audible warning controls may be located elsewhere, or may have operational areas that extend beyond these zones.

**4.5** The operational area of the following controls shall be located to the right of the reference plane:

- master lighting control (if panel-mounted and right-hand drive);
- hand-operated parking brake (left-hand drive only).

**4.6** When there is one stalk control, other than the gear selector, in zone 3, it shall operate the windscreen washer and wiper. If there are two or more stalks in zone 3, other than the gear selector, the windscreen washer and wiper shall be controlled by that stalk with an operational area that is closest to the steering-wheel rim.

**4.7** It is strongly recommended that subclauses 4.2 and 4.6 apply to both left- and right-hand drive vehicles. However, some countries have a long-standing practice in right-hand drive vehicles of mirror-imaging (about the reference plane) the controls given in subclauses 4.2 and 4.6. In these countries only, subclauses 4.2 and 4.6 may be applied to right-hand drive vehicles by changing zone one to zone three in subclause 4.2, and zone three to zone one in subclause 4.6.<sup>2)</sup>

**4.8** The ignition switch control shall be located to the right of the reference plane.

**4.9** All or part of the hazard warning control shall be located inboard of the reference plane.

## **5 Requirements for combination of functions into multifunction controls**

**5.1** The following pairs of functions shall be operated by the same control:

- windscreen wiping on/off and windscreen washing on/off (if power-operated);
- optical warning and headlights beam switching.

**5.2** The master lights control shall not be operated by the same control as that for any of the following functions:

- audible warning;
- windscreen wiping;
- windscreen washing;
- turn signal direction indicator.

A combination of the master lighting function with these functions is allowed, providing one of the modes to be avoided (see table 1) for the function is chosen for the master lighting function.

## **6 Requirements for the visibility of display**

**6.1** The display area of the following display shall be visible without head movement (see figure 2).

- speedometer.

**6.2** The identification and those parts of the display area required to indicate that a quarter and less of the maximum stored fuel is available shall be visible without head movement for the fuel level indicator (see figure 2).

The remaining parts of the display area shall also be visible; for these, head movement is permitted.

---

2) It is planned to delete subclause 4.7 at the next five year review of ISO 4040.

Table 1 — Modes of operation for stalk control functions

Function	Preferred mode	Modes to be avoided	Secondary operational surfaces to be avoided
Master lighting switching	None	None	Secondary touch or proximity operational surfaces which are not protected from inadvertent operation (i.e. shielding recessing, sequencing, etc.)
Headlights beam switching	Approximately parallel to the steering-wheel axis	Directed towards the steering-wheel axis Rotation approximately about the axis of the control	All
Audible warning	None	Approximately parallel to the steering-wheel plane Rotation approximately about the axis of the control	All
Windscreen wiping	None	Approximately parallel to the steering-wheel axis Directed towards the steering-wheel axis NOTE — These do not preclude the automatic operation of wipers when washers are activated.	Secondary touch or proximity operational surfaces which are not protected from inadvertent operation (i.e. shielding, recessing, sequencing, etc.) (for on-off only)
Windscreen washing	Directed towards the steering-wheel axis or approximately parallel to the steering-wheel axis (to the right of the reference plane only)	None	All
Direction indication	Approximately parallel to the steering-wheel plane	All others	All
Optical warning	Approximately parallel to the steering-wheel axis	Directed towards the steering-wheel axis Rotation approximately about the axis of the control	All

**6.3** The indication and those parts of the display area required to indicate a critical condition shall be visible without head movement for the following indicators:

- engine oil pressure;
- engine coolant temperature.

The remaining parts of the display area shall also be visible; for these, head movement is permitted.

**6.4** The identification of the following indicators shall be visible without head movement:

- battery charging condition;
- automatic transmission (if mounted on the instrument panel or steering column).

The remaining parts of the display area shall also be visible; for these, head movement is permitted.

**6.5** A single zone of the illuminated area of the following tell-tales shall be visible without head movement:

- brake;
- parking brake;
- high/main beam;
- turn signal direction indicator;
- vehicle hazard warning signal;
- seat belt warning;
- passive restraint readiness indicator;
- engine oil pressure;
- engine coolant temperature;
- choke;
- fuel level;
- battery charging;
- automatic transmission (if mounted on the instrument panel or steering column).

The single zone of the illuminated area shall be large and/or bright enough to attract the attention of the operator. The other parts of the display area shall also be visible; for these, head movement is permitted.

**6.6** If for any of the following functions, there is a master tell-tale which meets the requirements of subclause 6.5 and which is illuminated simultaneously with it, the individual tell-tale need not be visible without head movement:

- brake;
- passive restraint readiness indicator;
- engine oil pressure;
- engine coolant temperature;
- battery charging;
- parking brake.

**6.7** When both an indicator and a tell-tale are fitted, it is only necessary to comply with the specifications of one of subclauses 6.2, 6.3, 6.4 and 6.5 for each function.

## **7 Requirements for modes of operation for stalk controls**

When functions are operated by stalk controls mounted on or near the steering column (see figure 4), the preferred modes of operation and the modes to be avoided are given in table 1.