

# INTERNATIONAL STANDARD

ISO  
7005-3

First edition  
1988-02-15



---

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION  
ORGANISATION INTERNATIONALE DE NORMALISATION  
МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ

---

## **Metallic flanges —**

### **Part 3: Copper alloy and composite flanges**

*Brides métalliques —*

*Partie 3: Brides en alliages de cuivre et brides composites*

STANDARDSISO.COM : Click to view the full PDF of ISO 7005-3:1988

Reference number  
ISO 7005-3:1988 (E)

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council. They are approved in accordance with ISO procedures requiring at least 75 % approval by the member bodies voting.

International Standard ISO 7005-3 was prepared by Technical Committee ISO/TC 5, *Ferrous metal pipes and metallic fittings*.

Users should note that all International Standards undergo revision from time to time and that any reference made herein to any other International Standard implies its latest edition, unless otherwise stated.

<b>Contents</b>	Page
<b>0</b> Introduction .....	1
<b>1</b> Scope and field of application .....	1
<b>2</b> Definitions and designation .....	2
<b>3</b> Pressure/temperature ( <i>p/T</i> ) ratings .....	2
<b>4</b> Materials .....	2
<b>5</b> Dimensions .....	3
<b>6</b> Joint facings and surface finish .....	3
<b>7</b> Drilling and spot-facing .....	3
<b>8</b> Tolerances .....	3
<b>9</b> Marking .....	4
<b>10</b> Inspection and test .....	4
<b>11</b> Information to be supplied by the purchaser .....	4
<b>12</b> Limitations for flanges attached by soft solder or silver brazing .....	22
<b>Bibliography</b> .....	25
 <b>Annex</b>	
Application and installation .....	26

STANDARDSISO.COM: Click to view the full PDF of ISO 7005-3:1988

This page intentionally left blank

STANDARDSISO.COM : Click to view the full PDF of ISO 7005-3:1988

# Metallic flanges —

## Part 3: Copper alloy and composite flanges

### 0 Introduction

Various flange systems based on differing design criteria have been in use throughout the world for many years. Given the increasing difficulties arising from such a situation, this International Standard has been based on a single series of metallic flanges. ISO 7005 will be published in four parts as follows:

- Part 1: Steel flanges
- Part 2: Cast iron flanges
- Part 3: Copper alloy and composite flanges
- Part 4: Aluminium and aluminium alloy flanges

This part of ISO 7005 is based on the American and European copper alloy flange systems which have been combined to produce one International Standard with some changes to the dimensions specified in the two systems.

The flanges specified in this part of ISO 7005 are intended, in general, for use with copper or copper alloy tubes and pipework system components. Integral flanges are also intended for use with steel and cast iron pipework system components.

In the American system, flanges are designated by a Class rating but in this part of ISO 7005 the relevant Class ratings are designated by nominal pressure (PN) ratings.

The equivalent designations are as follows:

- Class 150: ISO PN20
- Class 300: ISO PN50

The ratings for ISO PN20 and ISO PN50 flanges are those based on American standards, established for use in copper alloy pipework systems. The ratings used in the European system remain as ISO PN6, ISO PN10, ISO PN16, ISO PN25 and ISO PN40.

In this part of ISO 7005, ISO copper alloys, in wrought and cast forms, have been specified where they are comparable with the American and European materials. In addition, an American specification has been retained for a ferrous backing flange

material and work is proceeding within ISO to prepare steel material specifications suitable for flange applications.

Flange details in all four parts of ISO 7005 are such that flanges having the same PN and nominal size (DN) values and compatible flange facings will mate together.

Users of this part of ISO 7005 should satisfy themselves that the flanges comply with any statutory requirements.

### 1 Scope and field of application

This part of ISO 7005 for a single system of flanges specifies requirements for circular copper alloy and composite flanges in the following nominal pressure ratings:

Series 1*	Series 2*
ISO PN10	ISO PN6
ISO PN16	ISO PN25
ISO PN20	ISO PN40
ISO PN50	

Attention is drawn to the need to refer to the pressure/temperature ( $p/T$ ) ratings in tables 10, 10a), 10b) and 10c) for the maximum permissible working pressures and temperatures, particularly for ISO PN20 and ISO PN50 flanges and for ISO PN6, ISO PN10, ISO PN16 and ISO PN25 flanges attached by soft solder or silver brazing.

This part of ISO 7005 specifies the types of flanges and their facings, dimensions, tolerances, bolt sizes (including copper alloy), flange face surface finish, marking, testing, inspection and materials.

#### NOTES

- 1 Dimensions of gaskets will be the subject of a future International Standard.
- 2 For guidance, information on the application and installation of flanges is given in the annex, which does not form an integral part of this part of ISO 7005.

\* Series 1 ratings are the basic ratings; series 2 ratings have limited application.

## 2 Definitions and designation

### 2.1 Definitions

**2.1.1 nominal size (DN):** A numerical designation of size which is common to all components in a piping system other than components designated by outside diameters or by thread size. It is a convenient round number for reference purposes and is only loosely related to manufacturing dimensions.

#### NOTES

- 1 Nominal size is designated by "DN" followed by the appropriate number.
- 2 This definition is in accordance with that given in ISO 6708.

**2.1.2 nominal pressure (PN):** A numerical designation which is a convenient rounded number for reference purposes.

All equipment of the same nominal size (DN) designated by the same PN number shall have compatible mating dimensions.

#### NOTES

- 1 The maximum allowable working pressure depends on materials, design and working temperatures and should be selected from the tables of pressure/temperature ratings given in this part of ISO 7005.
- 2 In this part of ISO 7005, nominal pressure is designated by the letters "ISO PN" followed by the appropriate reference number.
- 3 This definition of nominal pressure is in accordance with that given in ISO 7268.

### 2.2 Designation of types and facings

Figure 1 shows the basic commonly used flanges identified according to type.

- 01 — Plate flange in copper alloy for brazing or welding.
- 02 — Loose flange in ferrous material with a plate collar in copper alloy for brazing or welding.
- 04 — Loose flange in ferrous material with a welding neck collar in copper alloy for welding.
- 05 — Blank flange in copper alloy or in ferrous material clad with the jointing face in copper alloy.
- 07 — Loose flange in ferrous material with a slip-on collar in copper alloy for soft soldering, brazing or welding.
- 11 — Welding neck flange in copper alloy.
- 12 — Hubbed slip-on flange in copper alloy for soft soldering, brazing or welding.
- 14 — Hubbed slip-on flange in copper alloy for soft soldering, brazing or welding and supplied with tube-stops, the dimensions and locations of which shall be at the discretion of the manufacturer or as specified by the purchaser. In addition, integral grooves for preplaced soft-solder or brazing alloy rings may be machined in the sockets, the dimensions and locations of which shall be at the discretion of the manufacturer or as specified by the purchaser.
- 21 — Integral flange in copper alloy as part of some other equipment or component.

## 3 Pressure/temperature ( $p/T$ ) ratings

### 3.1 General

The pressure/temperature ratings of the materials specified in 4.1 shall be the maximum allowable non-shock working pressures at the temperatures given in tables 10, 10a), 10b) and 10c), as appropriate. Linear interpolation is permitted for intermediate temperatures.

### 3.2 Rating of flanged joints

Where two flanges in a flanged joint do not have the same pressure/temperature rating, the rating of the joint at any temperature shall not exceed the lower of the two flange ratings at that temperature.

### 3.3 Temperature

NOTE — The temperature shown for a corresponding pressure rating is considered to be the same as that of the contained fluid. Use of a pressure rating corresponding to a temperature other than that of the contained fluid is the responsibility of the user, subject to the requirements of any applicable code or regulation.

## 4 Materials

### 4.1 Range of materials

Flanges shall be manufactured from the materials specified in tables 11 and 11a) as appropriate.

#### NOTES

- 1 Each national standards organization has the responsibility of determining the national materials comparable with the materials specified in this part of ISO 7005.
- 2 Where there is an appropriate application standard, it is the responsibility of the purchaser to ensure compliance with the requirements of that standard.

### 4.2 Gaskets

The various types, dimensions and materials used for gaskets are not within the scope of this part of ISO 7005.

### 4.3 Bolting

The materials of the bolting shall be chosen by the user according to the pressure, flange material and the selected gasket so that the flanged joint remains tight under the expected operating conditions.

#### NOTES

- 1 For the purposes of this part of ISO 7005, either metric or inch bolting may be used for ISO PN20 and ISO PN50 flanges in conjunction with gaskets manufactured from sheet materials.
- 2 For flange types 01, 05 (when it is copper alloy only), 11, 12, 14 and 21, where copper alloy bolting is used, the recommended bolting materials are ISO 428 1/28A or 1/28B for temperatures up to and including 120 °C. (See table 11 for an explanation of the abbreviated alloy designations.)
- 3 For flange types 02, 04, 05 (when it is ferrous with copper alloy cladding) and 07, ferrous bolting should be used and reference should be made to ISO 7005-1.

## 5 Dimensions

### 5.1 Range of nominal sizes

The range of nominal sizes applicable to each flange type and to each pressure rating shall be as specified in table 2.

NOTE — The sizes of copper and copper alloy tubes are designated by reference to the outside diameter in millimetres.

### 5.2 Dimensional details

Dimensions of flanges shall be in accordance with the following tables, as appropriate:

table 3 for ISO PN6 flanges

table 4 for ISO PN10 flanges

table 5 for ISO PN16 flanges

table 6 for ISO PN20 flanges

table 7 for ISO PN25 flanges

table 8 for ISO PN40 flanges

table 9 for ISO PN50 flanges

#### NOTES

1 The bore sizes of type 21 flanges are usually equal to the nominal size of the pipe, valve or fitting of which they form a part and the actual bore sizes are usually given in the appropriate product standard.

2 Where type 07, 12 and 14 flanges are for use with soft soldering techniques only, then reference should be made to ISO 2016 for socket depths.

3 For type 04 and 11 flanges the recommended weld preparation angle is  $37,5^\circ \pm 2,5^\circ$  when butt welding to pipe with thicknesses of 3 mm and greater.

## 6 Joint facings and surface finish

6.1 Types 01, 11, 12, 14 and 21 flanges shall be supplied with flat faces for use with full-face gaskets.

#### NOTES

1 Notes at the foot of table 3 (ISO PN6), table 4 (ISO PN10), table 5 (ISO PN16) and table 7 (ISO PN25) indicate which sizes may be used in conjunction with inside bolt circle gaskets and type 02, 04, 05 and 07 flanges.

2 Where type 21 flanges in table 3 (ISO PN6), table 4 (ISO PN10), table 5 (ISO PN16) and table 7 (ISO PN25) in sizes up to and including DN 100 are required for bolting to flanges with raised faces, then the appropriate flange thickness ( $C_1^*$ ) given in table 8 (ISO PN40) applies.

6.2 Where type 01, 11, 12 and 14 flanges in sizes above DN 50, and type 21 flanges in sizes above DN 100 are required to be bolted to existing raised face type steel or cast iron flanges, then the raised faces shall be removed.

6.3 Where type 01, 11, 12, 14 and 21 flanges for ISO PN20 and ISO PN50 are required to be bolted to existing raised face type steel or cast iron flanges, then the raised faces on all sizes shall be removed.

6.4 All flange jointing faces shall be finished in accordance with table 1. The faces shall be compared by visual or tactile means with reference specimens which conform to the  $R_a$  and  $R_z$  values given in table 1.

#### NOTES

1 It is not intended that instrument measurements are taken on the flange faces, and the  $R_a$  and  $R_z$  values as defined in ISO 468 relate to the reference specimens.

2 Other finishes may be agreed between the manufacturer and purchaser.

Table 1 — Surface finish of flanges

Values in micrometres

Manufacturing process	$R_a$	$R_z$
Turning <sup>1)</sup>	3,2 to 12,5	12,5 to 50
Other <sup>2)</sup>	3,2 to 6,3	12,5 to 25

1) "Turning" covers any method of machine operation producing either serrated concentric or serrated spiral grooves.

2) Processes other than turning are permissible provided that they give a surface finish in compliance with the  $R_a$  and  $R_z$  values specified.

6.5 Flange rims are permitted to be machined or left unmachined.

6.6 Composite flanges shall be machine finished, or have a surface equivalent to that obtained by machining on all locating diameters, bores and abutment faces. The abutment faces shall be flat and square to the bore axis.

## 7 Drilling and spot-facing

7.1 Unless otherwise specified by the purchaser, all bolt holes shall be equally spaced on the pitch circle diameter,  $K$ . In the case of integral flanges, the bolt holes shall be positioned off-centre.

7.2 Bearing surfaces for the nuts shall be parallel to the flange jointing face within  $1^\circ$  and shall be capable of accepting a normal series washer complying with the requirements of ISO 887.

7.3 Any back-facing or spot-facing required to accomplish this shall not reduce the flange thickness to less than the minimum specified.

7.4 When a bossed or integral flange is back-faced, it is permissible for the fillet to be reduced but the fillet shall not be eliminated entirely.

## 8 Tolerances

Flanges shall be manufactured to comply with the tolerances specified in table 12.

## 9 Marking

Flanges other than integral shall be clearly marked as follows:

- a) the nominal size (DN) and the nominal pressure rating (ISO PN);
- b) material designation (for copper alloy and ferrous material designations, see table 11);
- c) manufacturer's name or trademark.

*Examples:*

Copper alloy component:  
**DN 300 ISO PN20 I/29A XXXX**  
(e.g. for CuNi10Fe1Mn)

Ferrous component:  
**DN 300 ISO PN20 A105 XXXX**

Copper alloy flanges shall be clearly and permanently marked by vibro or electrolytic etching or by other suitable means. Stamping with steel stamps shall not be used. The manufacturer's name or trademark together with other relevant marking may be produced during casting or forging operations.

NOTE — Ferrous flanges may be marked round the rim of the flange using round-nosed steel stamps.

## 10 Inspection and test

ISO PN20 and ISO PN50 flanges specified are designed to be interchangeable with, but not identical to, comparable flanges to ANSI B16.24.

## NOTES

- 1 It is recommended that these flanges be accepted by inspectors as complying with the dimensions specified in ANSI B16.24.
- 2 This part of ISO 7005 does not make provision for routine inspection or pressure testing of separate flanges. However, flanges may be required to be pressure tested after attachment to a pipe or other equipment. The test pressure is then dependent on the requirements of the appropriate standard or code of practice in accordance with which the equipment has been manufactured (see the annex).

## 11 Information to be supplied by the purchaser

The following information should be supplied by the purchaser in the enquiry and/or order:

- a) number of this part of ISO 7005, i.e. ISO 7005-3;
- b) nominal size — DN followed by the appropriate number;
- c) nominal pressure — ISO PN followed by the appropriate number;
- d) flange type number (and whether thicker flanges are required; see 6.1);
- e) material designations (for both the copper alloy and the ferrous component, where applicable);
- f) any protective coating (galvanizing, painting) of the ferrous flanges, subject to agreement between the purchaser and manufacturer;
- g) whether flange rims are to be machined or unmachined (see 6.5);
- h) the bore of the flange and/or collar where flanges can be made to suit more than one tube diameter (see tables 3 to 9).



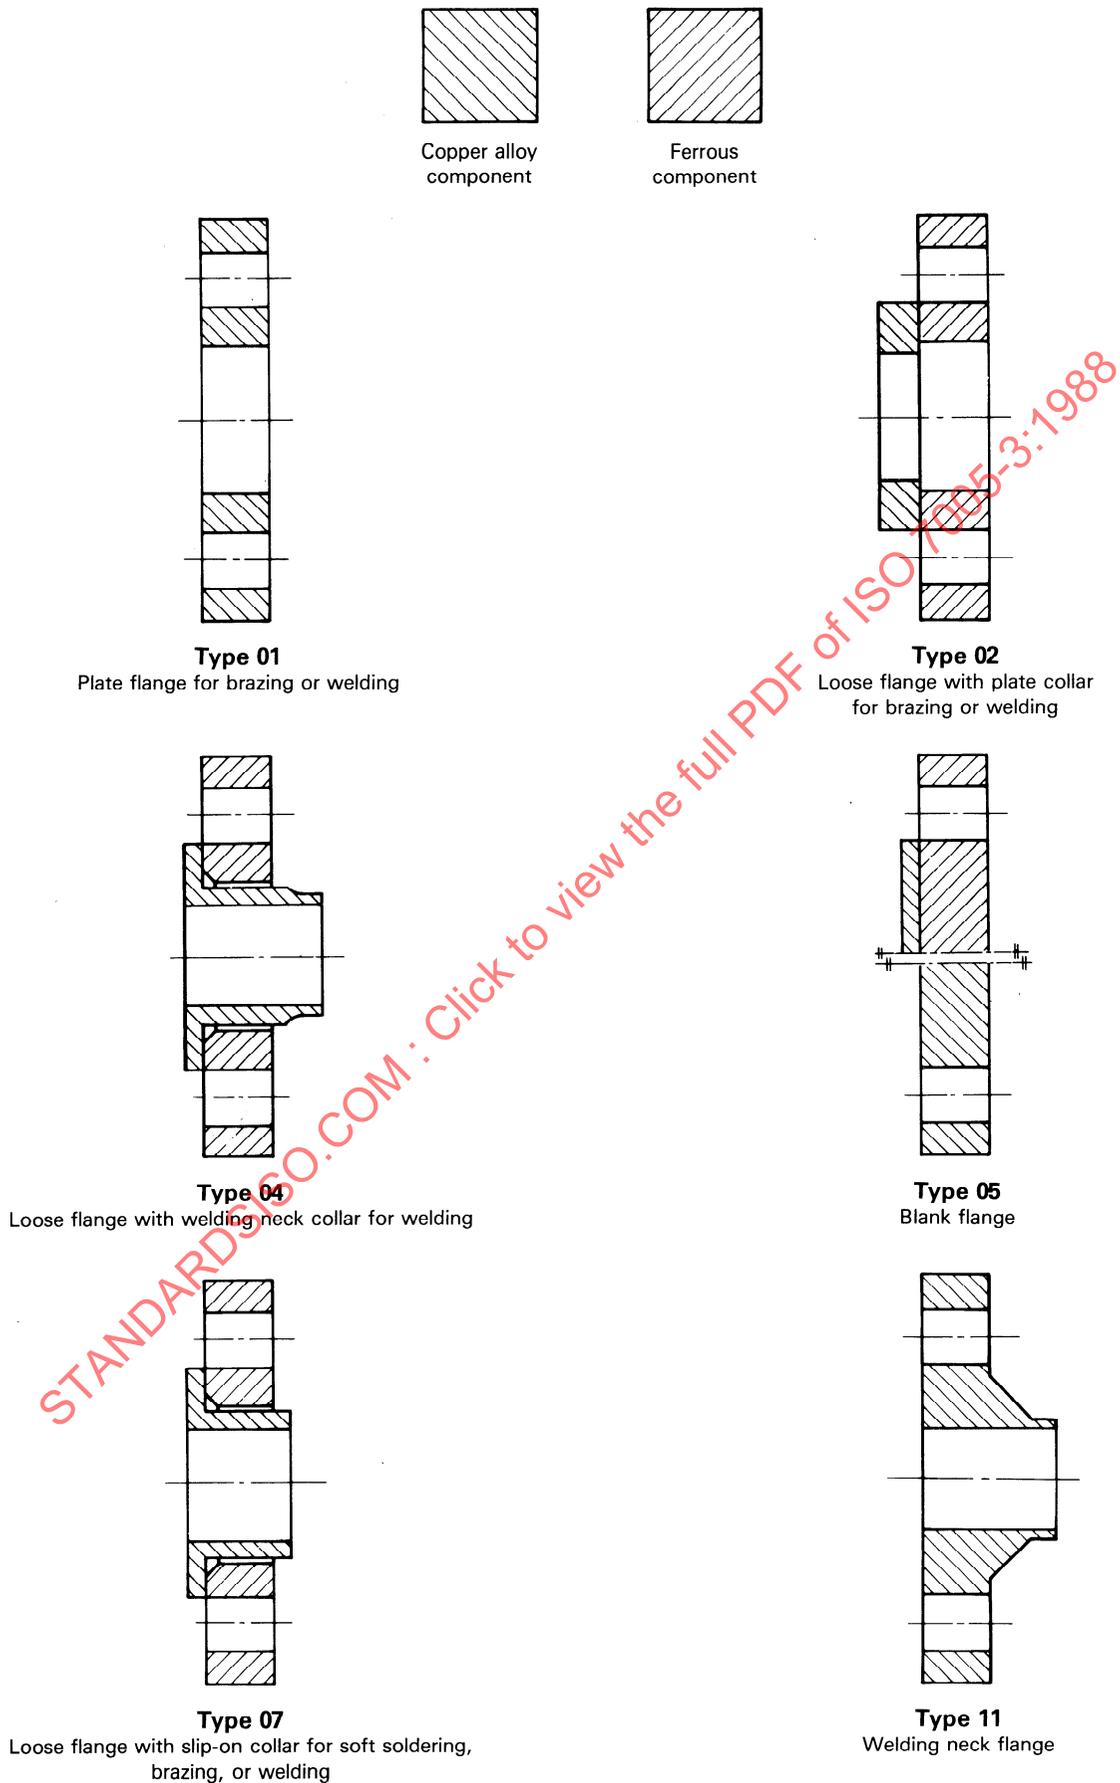



Figure 1 — Types of flanges

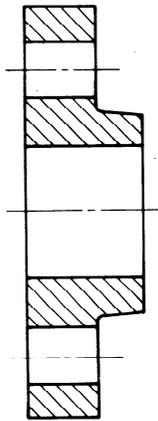

**Type 12**  
Hubbed slip-on flange for soft soldering,  
brazing or welding

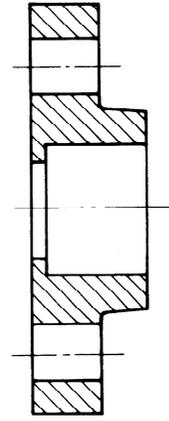


**Type 14**  
Hubbed slip-on flange for soft soldering,  
brazing or welding with tube-stops

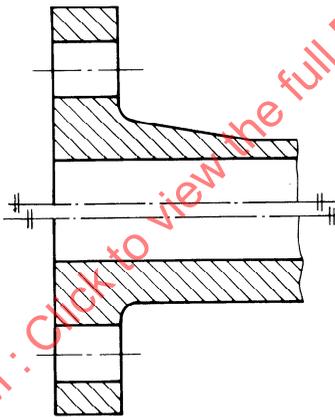


**Type 21**  
Integral flange


**Figure 1 — Types of flanges (concluded)**

Table 2 – Synoptic table for copper alloy and composite flanges


Type No.	Table	ISO PN	DN																																		
			10	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600	700	800	900	1 000	1 200	1 400	1 600	1 800						
	3	6																																			
	4	10																																			
	5	16																																			
	6	20																																			
		25																																			
		40																																			
	50																																				
		6																																			
		10																																			
		14																																			
	7	25																																			
	8	40																																			
	50																																				
	3	6																																			
	4	10																																			
	5	16																																			
	6	20																																			
	7	25																																			
	9	40																																			
	50																																				
	3	6																																			
	4	10																																			
	5	16																																			
	6	20																																			
	7	25																																			
	8	40																																			
	50																																				
	3	6																																			
	4	10																																			
	5	16																																			
	6	20																																			
	9	50																																			
		6																																			
		10																																			
		16																																			
	6	20																																			
	9	50																																			
	3	6																																			
	4	10																																			
	5	16																																			
	6	20																																			
	9	50																																			
	3	6																																			
	4	10																																			
	5	16																																			
	6	20																																			
	9	50																																			
	3	6																																			
	4	10																																			
	5	16																																			
	6	20																																			
	7	25																																			
	9	50																																			

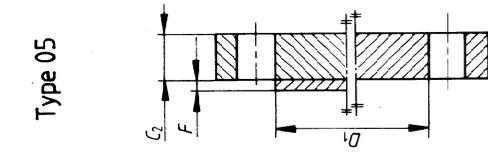

Type 05

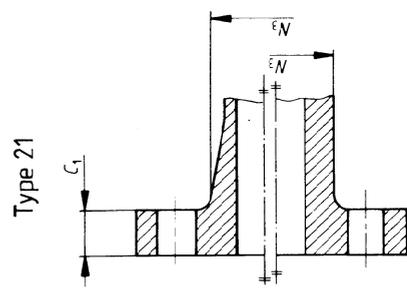


Type 21

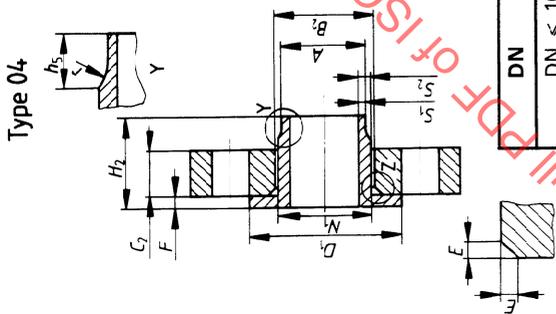


Type 04


DN	h <sub>5</sub>	r
DN < 100	15	3
125 < DN < 250	15	5
300 < DN < 350	16	5
400 < DN < 450	16	7
500 < DN < 600	20	7
700 < DN < 800	24	7

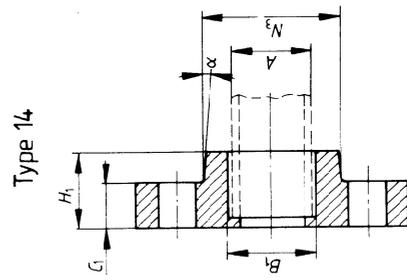


Type 14

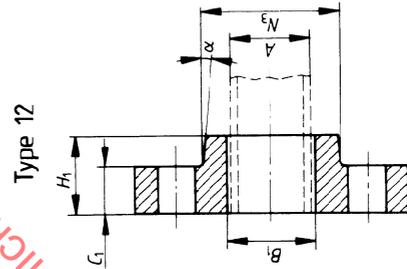


Type 12

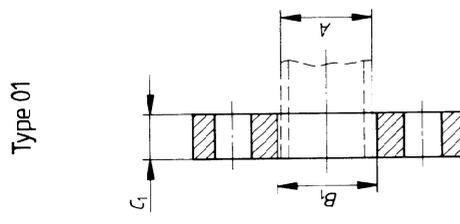

Type 01

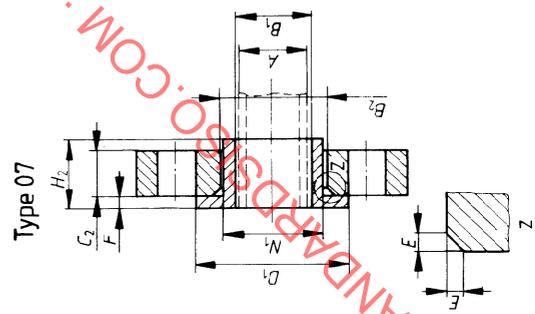

Type 07

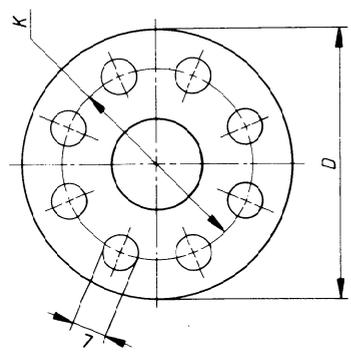

This diagram illustrates the arrangement but not necessarily the correct number of bolt holes.  
Refer to the column "number of bolts" in table 3 for the actual number.


Dimensions in millimetres

Table 3 — Dimensions of ISO PN6 flanges

Nominal size	Tube outside diameter	Mating dimensions				Flange thickness	Hub diameter	Neck diameter	Collar diameter	Length through hub or collar	Collar thickness			Collar flange thickness	Cladding thickness	Collar or raised face diameter	Bore of flange or collar			Bore of flange	Chamber	
		Outside diameter of flange	Diameter of bolt circle	Diameter of bolt holes	Number						Nominal size of bolts	Flange type					D <sub>1</sub>	B <sub>1</sub>	B <sub>2</sub>			
												04	05									07
DN	A	D	K	L		C <sub>1</sub>	N <sub>3</sub>	N <sub>1</sub>	H <sub>1</sub>	H <sub>2</sub>	S <sub>1min</sub>	S <sub>2</sub>	F	D <sub>1</sub>	01	04	07	E				
10	16	75	50	11	4	M10	16	18	21	10	35	16	1	5	33	15,07	19	23	04			
15	18	80	55	11	4	M10	21	22	26	10	35	16	1	5	38	18,07	24	28	07			
20	22	90	65	11	4	M10	28	27	31	10	40	16	1,5	5	48	22,08	28	33				
25	28	100	75	11	4	M10	35	32	36	12	40	18	1,5	5	58	28,08	33	38				
32	35	120	90	14	4	M12	42	40	45	12	40	18	1,5	5	69	35,09	41	47				
40	42	130	100	14	4	M12	52	46,5	51	13	45	19	1,5	5	78	42,09	48	53				
50	44,5	140	110	14	4	M12	64	59	67	15	45	19	1,5	5	88	54,09	62	69				
65	76,1	160	130	14	4	M12	79	78	87	17	45	19	2	5	108	76,33	81	89				
80	88,9	190	150	18	4	M16	94	91	104	17	50	21	2,5	4	124	89,13	94	106				
100	108	210	170	18	4	M16	116	110	123	20	50	21	2,5	4	144	108,38	113	125				
125	133	240	200	18	8	M16	148	135	148	22	50	21	2,5	4	174	133,63	138	151				
150	159	265	225	18	8	M16	180	161	175	24	50	21	2,5	4	199	159,63	164	178				
175	193,7	295	255	18	8	M16	209	196	210	26	50	23	3	4,5	229	194,63	200	213				
200	219,1	320	280	18	8	M16	234	222	235	28	50	23	3	4,5	254	220,03	225	238				
250	267/273	375	335	18	12	M16	286	269/275	285/291	30	50	27	3	4,5	309	268,13/274,13	278/284	288/296	5/7			
300	323,9	440	395	22	12	M20	342	326	342	30	50	30	4	5,5	363	325,03	330	345	7			
350	368	490	445	22	12	M20	386	370	386	30	50	32	4	5,5	413	369,13	374	389	7			
400	419	540	495	22	16	M20	442	421	439	30	50	36	4	5,5	463	420,13	426	442	7			
450	457,2	595	550	22	16	M20	492	459	477	32	50	38	4	5,5	518	458,33	465	480	7			
500	508	645	600	22	20	M20	546	510	530	33	50	47	4,5	6	568	509,13	516	533	7			
600	610	755	705	26	20	M24	646	612	637	—	60	50	5	6,5	667	612	619	639	9			
700	711	860	810	26	24	M24	748	713	741	—	60	55	6	7,5	772	713	721	743	9			
800	813	975	920	30	24	M27	852	815	844	—	60	60	6	7,5	878	815	824	846	9			
900	914	1 075	1 020	30	24	M27	954	—	948	—	—	65	—	—	978	916	—	950	9			
1 000	1 016	1 175	1 120	30	28	M27	1 054	—	1 051	—	—	70	—	—	1 078	1 018	—	1 050	9			
1 200	1 220	1 405	1 340	33	32	M30	1 260	—	1 259	—	—	80	—	—	1 295	1 222	—	1 262	9			
1 400	1 420	1 630	1 560	36	36	M33	1 466	—	1 465	—	—	88	—	—	1 510	1 422	—	1 468	9			
1 600	1 620	1 830	1 760	36	40	M33	1 672	—	1 669	—	—	98	—	—	1 710	1 622	—	1 672	9			
1 800	1 820	2 045	1 970	39	44	M36	1 876	—	1 873	—	—	110	—	—	1 918	1 822	—	1 876	9			

NOTES

- For type 21 flanges in sizes up to and including DN 100 and type 12 (and 14) flanges up to and including DN 50 for bolting to flanges with raised faces, the appropriate thickness (C<sub>1</sub>\*) in table 8 (ISO PN40) shall apply. (See 6.1.)
- Type 21 flanges in sizes DN 125 to DN 1 800 may be used with inside bolt circle gaskets and type 04, 05 and 07 flanges. (See 6.2.)
- For type 12 and type 14 flanges of all nominal sizes, α = 4° max.
- Dimension E is given for information only.

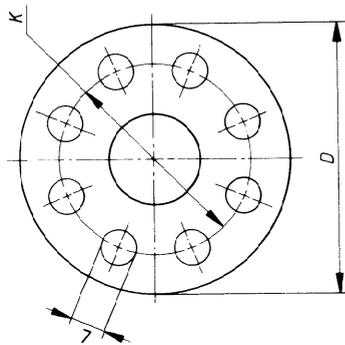


This diagram illustrates the arrangement but not necessarily the correct number of bolt holes.


Refer to the column "number of bolts" in table 4 for the actual number.

DN	$r$	$h_5$
DN < 100	3	15
DN < 125	5	15
DN < 150	5	16
DN < 200	7	16
DN < 250	7	20
DN < 300	7	24
DN < 350	7	24
DN < 400	7	32
DN < 450	7	32
DN < 500	7	32
DN < 600	7	32
DN < 700	7	32
DN < 800	7	32
DN < 900	7	32
DN < 1 200	7	32


Type 05

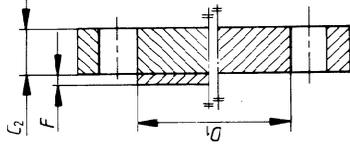


Type 04

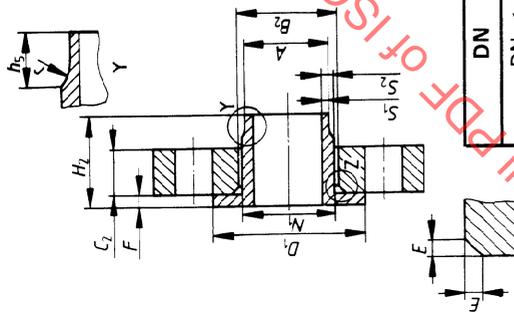


Type 01

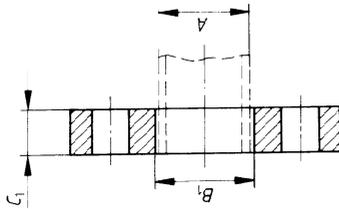


Type 21

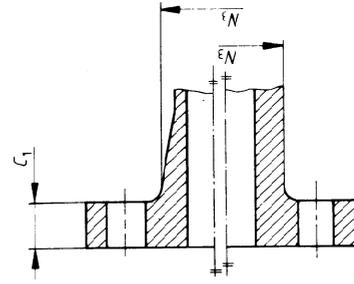


Type 14

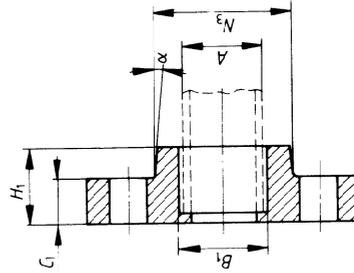

Type 12

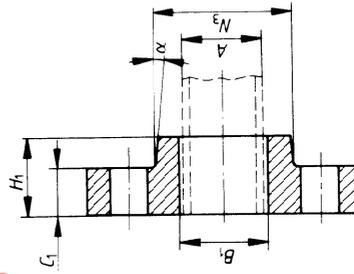

Type 07

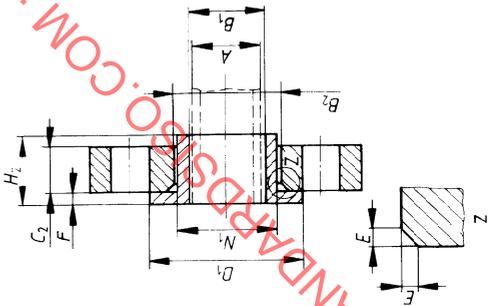

Dimensions in millimetres


Table 4 — Dimensions of ISO PN10 flanges

Nominal size	Mating dimensions				Tube outside diameter	DN	Flange thickness		Hub diameter	Neck diameter	Collar diameter		Length through hub or collar		Collar thickness	Collar flange thickness	Cladding thickness	Collar or raised face diameter	Bore of flange or collar		Bore of flange	Chamber											
	Outside diameter of flange		Diameter of bolt circle	Diameter of bolt holes			Number	Nominal size of bolts			C <sub>1</sub>	C <sub>2</sub>	12	14					21	N <sub>1</sub>			H <sub>1</sub>	H <sub>2</sub>	S <sub>1 min</sub>	S <sub>2</sub>	F	F <sub>min</sub>	D <sub>1</sub>	B <sub>1</sub>	B <sub>2</sub>	04	07
	04	07																															
10	15	16	60	14	4	M12	14	8	6	16	18	21	20	35	16	2	5	41	15,07	16,07	19	23	04	07									
15	18	20	65	14	4	M12	14	8	6	21	22	26	20	35	16	2	5	46	18,07	20,08	24	28	04	07									
20	22	25	75	14	4	M12	14	8	6	28	27	31	24	40	16	2,5	5	56	22,08	25,08	28	33	04	07									
25	28	30	85	14	4	M12	16	9	8	35	32	36	24	40	18	1,5	5	65	28,08	30,08	33	38	04	07									
32	35	38	100	18	4	M16	16	10	8	42	40	45	26	40	18	1,5	5	76	35,09	38,08	41	47	04	07									
40	42	44,5	150	18	4	M16	16	11	9	51	46,5	51	26	45	19	1,5	5	84	42,09	44,6	48	53	04	07									
50	54	57	125	18	4	M16	16	13	11	67	59	67	28	45	19	1,5	6	99	54,09	57,23	62	69	04	07									
65	76,1		185	18	4	M16	18	13	13	87	78	87	17	45	19	2	6	118	76,33		81	89	04	07									
80	88,9		200	18	8	M16	18	13	13	104	94	104	17	50	21	2,5	4	132	89,13		94	106	04	07									
100	108		220	18	8	M16	18	16	16	123	116	123	20	50	21	2,5	4	156	108,38		113	125	04	07									
125	133		250	210	8	M16	18	18	22	148	135	148	22	50	21	2,5	4	184	133,63		138	151	04	07									
150	159		285	240	8	M20	18	20	22	175	161	175	24	50	21	2,5	4	211	159,63		164	178	04	07									
175	193,7		315	270	8	M20	20	22	24	210	196	210	26	50	23	3	4,5	242	194,63		200	213	04	07									
200	219,1		340	295	8	M20	20	24	26	235	221	235	28	50	23	3	4,5	266	220,03		225	238	04	07									
250	267/273		395	350	12	M20	22	26	28	285	269/275	285/291	30	50	27	3	4,5	319	268,13/274,13		278/284	288/296	04	07									
300	323,9		445	400	12	M20	26	26	28	342	326	342	30	50	30	4	5,5	370	325,03		330	345	04	07									
350	368		505	460	16	M20	28	26	30	386	366	386	30	50	32	4	5,5	429	369,13		374	369	04	07									
400	419		565	515	26	M24	32	26	32	439	421	439	30	50	36	4	5,5	480	420,13		426	442	04	07									
450	457,2		615	565	26	M24	34	28	32	477	459	477	32	50	38	4,5	6	530	458,33		465	480	04	07									
500	508		620	620	20	M24	38	28	34	530	510	530	33	50	42	5	6,5	582	509,13		516	533	04	07									
600	610		780	725	30	M27	38	31	36	647	612	637	43	60	50	6	7,5	629	612		619	639	04	07									
700	711		895	840	30	M27	40	33	40	751	713	741	53	60	55	6,5	9,5	733	713		727	743	04	07									
800	813		1 015	950	33	M30	44	35	44	853	815	844	55	60	60	7,5	10,5	836	815		829	846	04	07									
900	914		1 115	1 050	33	M30	48	46	46	970	918	948	60	65	65	8,5	11,5	940	916		931	950	04	07									
1 000	1 016		1 230	1 160	36	M33	52	50	50	1 076	1 018	1 051	60	70	9	12	14	1 043	1 018		1 025	1 053	04	07									
1 200	1 220		1 455	1 380	39	M36	60	56	56	1 284	1 223	1 259	60	80	11	14	20	1 251	1 222		1 230	1 262	04	07									
1 400	1 420		1 675	1 590	42	M39	66	62	62	1 494	—	1 465	—	—	—	—	—	1 457	1 422		—	1 468	04	07									
1 600	1 620		1 915	1 820	48	M45	74	68	68	1 702	—	1 669	—	—	—	—	—	1 661	1 622		—	1 672	04	07									
1 800	1 820		2 115	2 020	48	M45	84	70	70	1 906	—	1 873	—	—	—	—	—	1 865	1 822		—	1 875	04	07									


NOTES

- For type 21 flanges in sizes up to and including DN 100 and type 12 (and 14) flanges up to and including DN 50 for bolting to flanges with raised faces, the appropriate thickness (C<sub>1</sub>\*) in table 8 (ISO PN40) shall apply. (See 6.1.)
- Type 21 flanges in sizes DN 125 to DN 1 800 may be used with inside bolt circle gaskets and type 04, 05 and 07 flanges. (See 6.2.)
- For type 12 and type 14 flanges of all nominal sizes, α = 4° max.
- Dimension E is given for information only.

Type 05


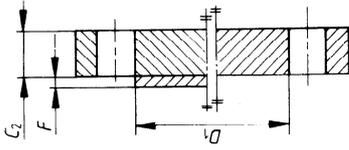


Type 04

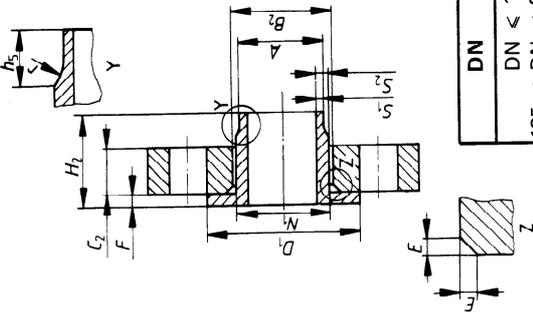


DN	$h_{15}$	$r$
DN < 100	15	3
100 < DN < 250	15	5
250 < DN < 350	16	5
350 < DN < 400	16	7

Type 01

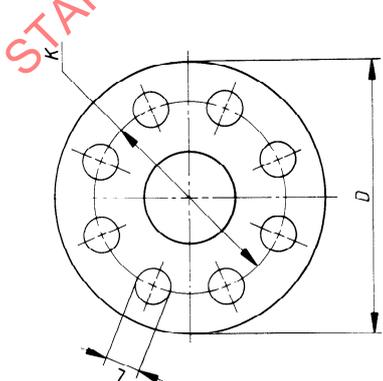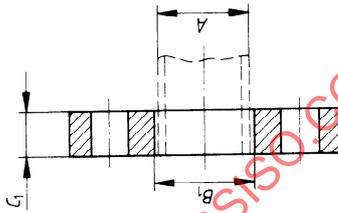


This diagram illustrates the arrangement but not necessarily the correct number of bolt holes.  
Refer to the column "number of bolts" in table 5 for the actual number.


Type 21

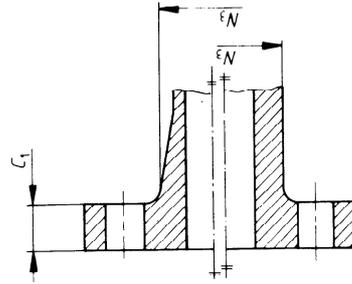

Type 14

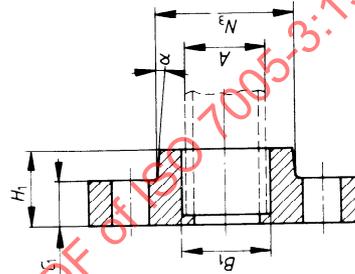

Type 12

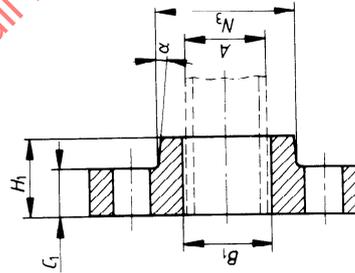

Type 07

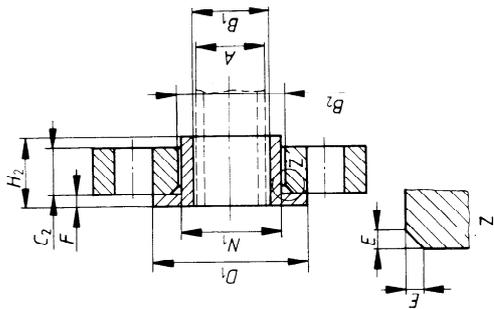






Table 5 — Dimensions of ISO PN16 flanges

Dimensions in millimetres





Nominal size	Tube outside diameter	Mating dimensions			Flange thickness		Hub diameter	Neck diameter	Collar diameter	Length through hub or collar			Collar thickness			Collar flange thickness	Cladding thickness	Collar or raised face diameter	Bore of flange or collar			Bore of flange	Chamfer				
		Outside diameter of flange	Diameter of bolt circle	Diameter of bolt holes	Number	Nominal size of bolts				C <sub>2</sub>	C <sub>1</sub>	N <sub>3</sub>	N <sub>1</sub>	H <sub>1</sub>	H <sub>2</sub>				S <sub>1min</sub>	S <sub>2</sub>	F			D <sub>1</sub>	B <sub>1</sub>	B <sub>2</sub>	E
10	15	90	60	14	4	M12	14	8	6	21	16	21	20	35	16	1	2,5	5	41	15,07	16,07	19	23	2			
15	18	95	65	14	4	M12	14	8	6	21	16	21	20	35	16	1	2,5	5	46	18,07	20,08	24	28	2			
20	22	105	75	14	4	M12	14	8	6	31	28	27	24	40	16	1,5	2,5	5	56	22,08	25,08	28	33	3			
25	28	115	85	14	4	M12	16	9	8	36	35	36	24	40	18	1,5	2,5	5	65	28,08	30,08	33	38	3			
32	35	140	100	18	4	M16	16	10	8	45	42	40	26	40	18	1,5	2,5	5	76	35,09	38,08	41	47	3			
40	42	150	110	18	4	M16	16	11	9	51	52	46,5	26	45	19	1,5	2,5	6	84	42,09	44,6	48	53	3			
50	54	165	125	18	4	M16	16	13	11	67	64	59	28	45	19	1,5	2,5	6	99	54,09	57,23	62	69	3			
65	76,1	185	145	18	4	M16	16	20	13	103	79	87	32	45	19	2	3,5	6	118	76,33	—	81	89	3			
80	88,9	200	160	18	8	M16	18	20	13	114	94	104	34	50	21	2,5	4	7	132	89,13	94	106	125	3			
100	100	220	180	18	8	M16	18	20	16	134	116	123	40	50	21	2,5	4	7	156	108,38	113	125	—	3			
125	133	250	210	18	8	M16	18	22	164	159	135,5	148	44	50	21	2,5	4	7	184	133,63	138	151	—	4			
150	159	285	240	22	8	M20	22	22	188	184	161,5	175	44	50	21	2,5	4	9	211	159,63	164	178	—	4			
175	193,7	315	270	22	8	M20	22	24	213	211	197	210	44	50	23	3	4,5	9	242	194,63	200	213	—	5			
200	219,1	340	295	22	12	M20	22	26	238	236	222	235	46	50	23	4	4,5	9	266	220,03	225	238	—	5			
250	267/273	405	355	26	12	M24	24	28	287	290	269/275	285/291	48	50	27	4	4,5	9	319	268,13/274,13	278/284	288/296	—	5/7			
300	323,9	460	410	26	12	M24	26	—	312	327	—	—	50	—	—	5	6,5	11	370	325,03	330	330	—	7			
350	368	520	470	26	16	M24	26	—	396	371	—	—	50	—	—	6	7,5	11	429	369,13	374	—	—	7			
400	419	580	525	30	16	M27	30	—	448	422	—	—	50	—	—	7,5	9	12	480	420,13	426	—	—	7			
500	508	715	650	33	20	M30	33	—	552	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—			

NOTES


- For type 21 flanges in sizes up to and including DN 100 and type 12 (and 14) flanges up to and including DN 50 for bolting to flanges with raised faces, the appropriate thickness (C<sub>1</sub>\*) in table 8 (ISO PN40) shall apply. (See 6.1.)
- Type 21 flanges in sizes DN 125 to DN 250 and type 12 (and 14) flanges in sizes DN 65 to DN 250 may be used with inside bolt circle gaskets and type 04, 05 and 07 flanges. (See 6.2.)
- For type 12 and type 14 flanges of all nominal sizes, α = 4° max.
- Dimension E is given for information only.

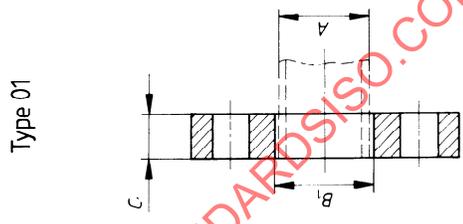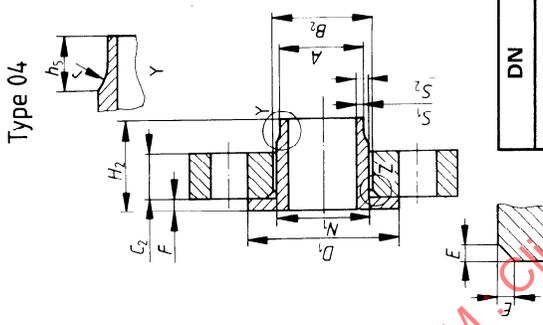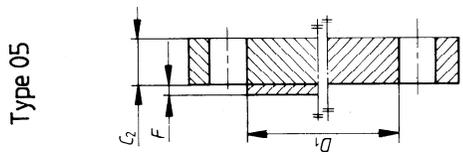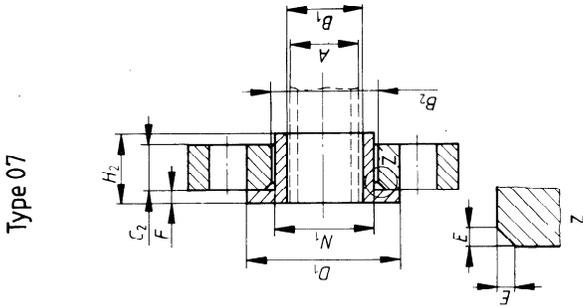

DN	$h_5$	$r$
DN $\leq$ 100	15	3
125 $\leq$ DN $\leq$ 250	15	5
300 $\leq$ DN $\leq$ 350	16	5
400 $\leq$ DN $\leq$ 450	16	7
500 $\leq$ DN $\leq$ 600	20	7
700 $\leq$ DN $\leq$ 800	24	7
DN $\geq$ 900	32	7

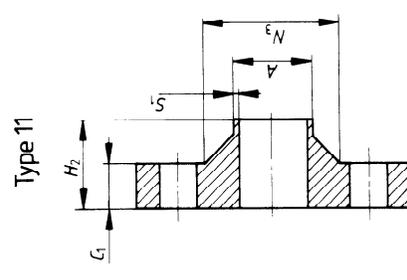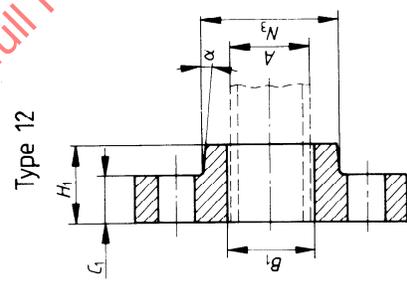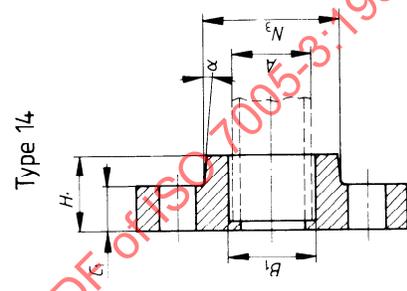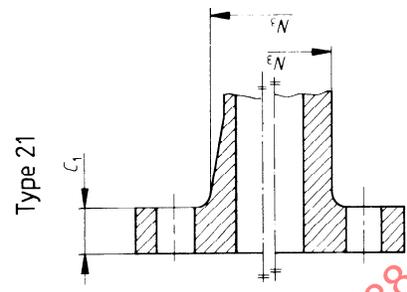


STANDARDSISO.COM Click to view the full PDF of ISO 7005-3:1988

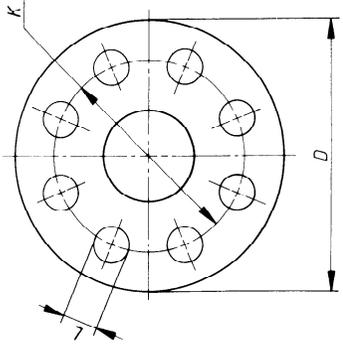


This diagram illustrates the arrangement but not necessarily the correct number of bolt holes.  
Refer to the column "number of bolts" in table 6 for the actual number.



Type 05


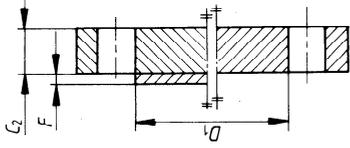


Type 04

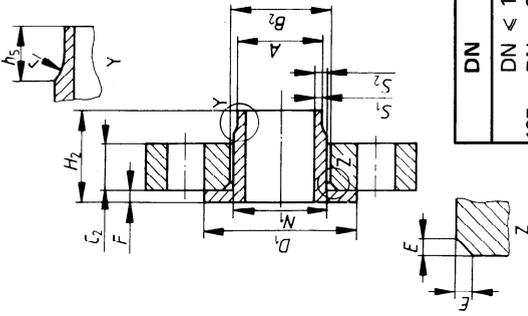

DN	h <sub>5</sub>	r
DN ≤ 100	15	3
125 ≤ DN < 250	15	5
DN = 300	16	5


Type 02

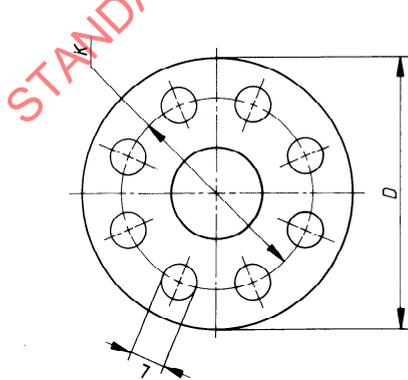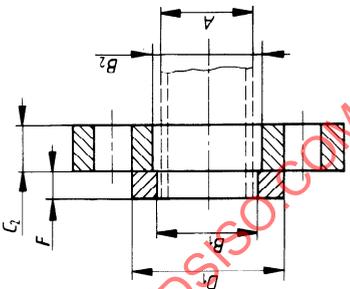


This diagram illustrates the arrangement but not necessarily the correct number of bolt holes.

Refer to the column "number of bolts" in table 7 for the actual number.

Type 21

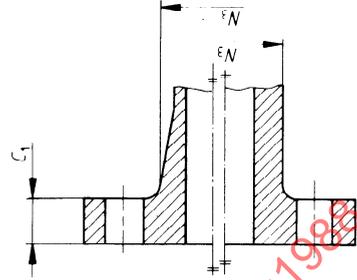

Type 14

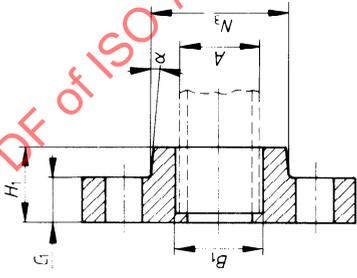

Type 12

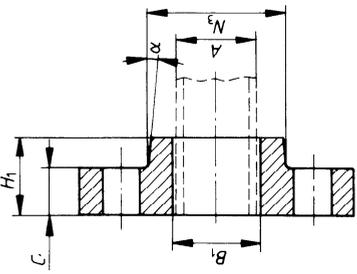



Table 7 – Dimensions of ISO PN25 flanges

Dimensions in millimetres

Nominal size  DN	Tube outside diameter  A		Mating dimensions					Flange thickness	Hub diameter	Neck diameter	Collar diameter	Length through hub or collar	Collar thickness	Collar flange thickness	Cladding thickness	Collar or raised face diameter	Bore of flange of collar	Bore of flange	Chamfer																
			Outside diameter of flange D	Diameter of bolt circle K	Diameter of bolt holes L	Bolts														Flange type															
						Number	Nominal size of bolts													02 04 05	12 14	21 14	21	04	12 14	04	04		02 04 05	02 04 05	02	12 14	02 04	04	
			C <sub>2</sub>	C <sub>1</sub>	N <sub>3</sub>		N <sub>1</sub>													H <sub>1</sub>	H <sub>2</sub>	S <sub>1min</sub>	S <sub>2min</sub>	F		D <sub>1</sub>	B <sub>1</sub>		B <sub>2</sub>	E					
10	15	16	90	60	14	4	M12	16	8	21	16	18	20	35	1,5	2,5	12	5	5	40	15,07	16,07	18	2											
15	18	20	95	65	14	4	M12	16	8	26	21	22	20	35	1,5	2,5	12	5	5	45	18,07	20,08	22	2											
20	22	25	105	75	14	4	M12	16	8	31	28	27	24	40	1,5	2,5	14	5	5	58	22,08	25,08	28	3											
25	28	30	115	85	14	4	M12	18	9	36	35	32	24	40	1,5	2,5	14	5	5	68	28,08	30,08	33	3											
32	35	38	140	100	18	4	M16	18	10	9	45	42	40	26	40	1,5	2,5	14	5	5	78	35,09	38,08	42	3										
40	42	44,5	150	110	18	4	M16	18	11	51	52	46,5	26	45	1,5	2,5	14	6	5	88	42,09	44,6	50	3											
50	54	57	165	125	18	4	M16	20	13	11	67	64	59	28	45	2	3	16	6	5	102	54,09	57,23	62	3										
65	76,1	185	145	18	8	M16	20	22	13	103	79	78	32	45	2,5	4	16	6	5	122	76,33	81	3												
80	88,9	200	160	18	8	M16	22	24	14	114	94	91	34	50	3,5	4,5	18	7	5	138	89,13	94	3												
100	108	235	190	22	8	M20	22	26	17	137	116	110	40	50	4	5	20	7	5	162	108,38	113	3												
125	133	270	220	26	8	M24	24	26	160	165	135,5	44	50	5	6,3	22	7	5	188	133,63	138	4													
150	159	300	250	26	8	M24	24	28	26	186	192	161,5	48	50	5	6,3	22	9	5	218	159,63	164	4												
175	193,7	330	280	26	12	M24	—	28	216	217	197	50	—	4	5,5	23	9	—	—	194,63	200	5													
200	219,1	360	310	26	12	M24	26	30	246	246	222	50	50	6	7,5	24	9	5	278	220,03	225	5													
250	267/273	425	370	30	12	M27	30	32	296	295	269/275	54	50	7	8,5	26	9	5	335	268,13/274,13	278	5/7													
300	323,9	485	430	30	16	M27	34	—	32	—	348	327	—	50	8	9,5	28	11	5	395	325,03	329	7												
350	368	555	490	33	16	M30	38	—	36	—	404	—	—	—	—	—	32	—	5	450	369,13	374	—												
400	419	620	550	36	16	M33	42	—	38	—	458	—	—	—	—	—	34	—	5	505	420,13	426	—												
500	508	730	660	36	20	M33	50	—	42	—	564	—	—	—	—	—	38	—	5	615	509,13	517	—												

NOTES


- 1 For type 21 flanges in sizes up to and including DN 100 and type 12 (and 14) flanges up to and including DN 50 for bolting to flanges with raised faces, the appropriate thickness (C<sub>1</sub>\*) in table 8 (ISO PN40) shall apply. (See 6.1.)
- 2 Type 21 flanges in sizes DN 125 to DN 250 and type 12 (and 14) flanges in sizes DN 65 to DN 250 may be used with inside bolt circle gaskets and type 02, 04, 05 and 07 flanges. (See 6.2.)
- 3 For type 12 and type 14 flanges of all nominal sizes,  $\alpha = 4^\circ$  max.
- 4 Dimension E is given for information only.

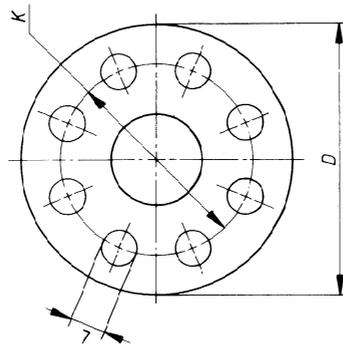


This diagram illustrates the arrangement but not necessarily the correct number of bolt holes.

Refer to the column "number of bolts" in table 8 for the actual number.


Type 02

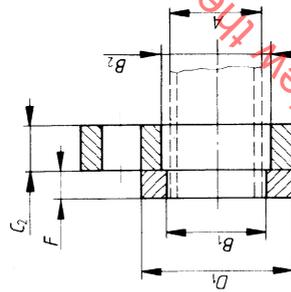

Type 05

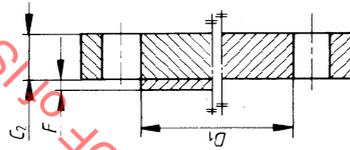

Type 21

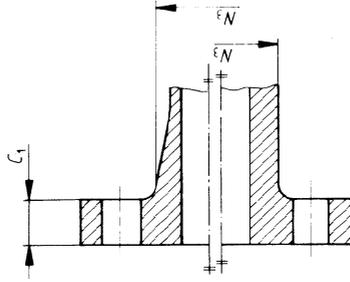

STANDARDISO.COM : Click to view the full PDF of ISO 7005-3:1988

Table 8 — Dimensions of ISO PN40 flanges


Dimensions in millimetres

Nominal size  DN	Tube outside diameter  A	Mating dimensions					Flange thickness	Neck diameter	Collar flange thickness	Cladding thickness	Collar or raised face diameter	Bore of flange or collar	Bore of flange								
		Outside diameter of flange  D	Diameter of bolt circle  K	Diameter of bolt holes  L	Bolts									Flange type							
					Number	Nominal size of bolts								02	21		21	02	05	02	05
														05	C <sub>1</sub>	C <sub>1</sub> *	N <sub>3</sub>	F	D <sub>1</sub>	B <sub>1</sub>	B <sub>2</sub>
10	16	90	60	14	4	M12	16	9	12	16	12	5	40	16,07	18						
15	20	95	65	14	4	M12	16	9	12	21	12	5	45	20,08	22						
20	25	105	75	14	4	M12	16	9	12	28	14	5	58	25,08	28						
25	30	115	85	14	4	M12	18	11	14	35	14	5	68	30,08	33						
32	38	140	100	18	4	M16	18	11	15	42	14	5	78	38,1	42						
40	44,5	150	110	18	4	M16	18	13	16	52	14	5	88	44,6	50						
50	57	165	125	18	4	M16	20	13	17	64	16	5	102	57,23	62						
65	76,1	185	145	18	8	M16	20	14	17	79	16	5	122	76,33	81						
80	88,9	200	160	18	8	M16	22	16	19	94	18	5	138	89,13	94						
100	108	235	190	22	8	M20	22	19	21	116	20	5	162	108,38	113						
125	133	270	220	26	8	M24	24	—	—	—	22	5	188	133,63	138						
150	159	300	250	26	8	M24	24	—	—	—	22	5	218	159,63	164						
200	219,1	375	320	30	12	M27	30	—	—	—	26	5	285	220,03	225						
250	267/273	450	385	33	12	M30	36	—	—	—	30	5	345	268,13/274,13	278						
300	323,9	515	450	33	16	M30	40	—	—	—	34	5	410	325,03	329						
350	368	580	510	36	16	M33	46	—	—	—	38	5	465	369,13	374						
400	419	660	585	39	16	M36	50	—	—	—	42	5	535	420,13	426						


NOTE — Type 21 C<sub>1</sub>\* thicknesses shall be used when required with a raised face of 1,6 mm or when required to be used with inside bolt circle gaskets or type 04, 05 and 07 flanges. (See 6.1.)

STANDARDSISO.COM : Click to view the full PDF of ISO 7005-3:1988


Type 07

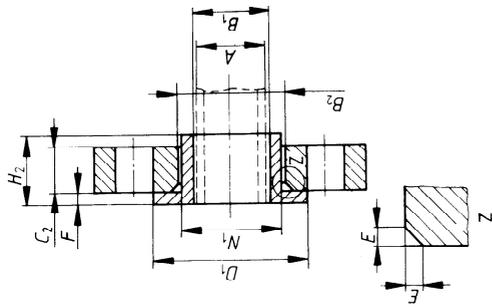


Type 05

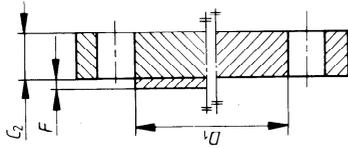

Type 04

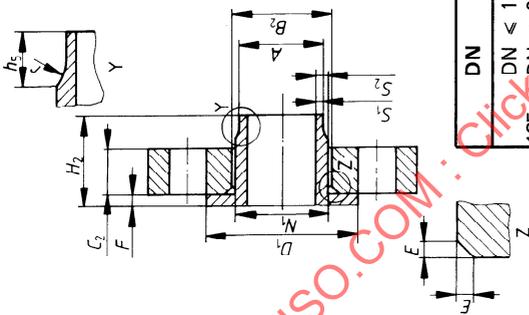


DN	$h_5$	$r$
DN ≤ 100	15	3
125 ≤ DN ≤ 250	15	5
300 ≤ DN ≤ 350	16	5
400 ≤ DN ≤ 450	16	7
500 ≤ DN ≤ 600	20	7

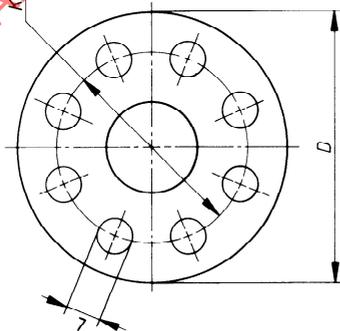


This diagram illustrates the arrangement but not necessarily the correct number of bolt holes.

Refer to the column "number of bolts" in table 9 for the actual number.


Type 21

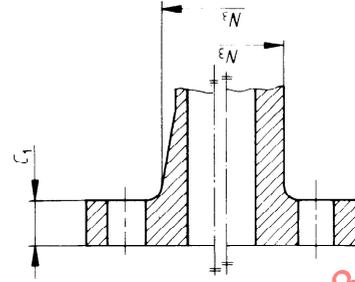

Type 14

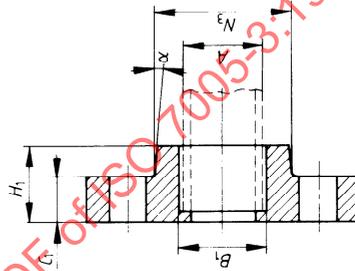

Type 12

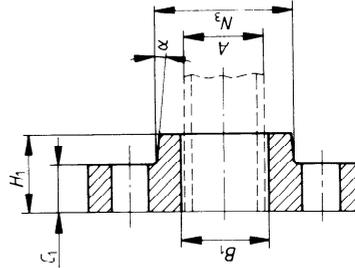

Type 11

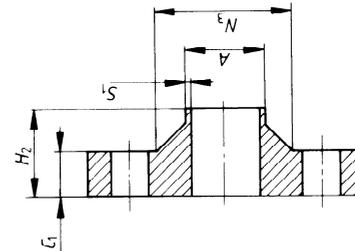


Table 9 — Dimensions of ISO PN50 flanges

Nominal size	Tube outside diameter	Mating dimensions		Dimensions in millimetres																							
		Outside diameter of flange	Diameter of bolt circle	Diameter of bolt holes	Number	Nominal size of bolts	Flange thickness		Hub diameter		Neck diameter		Collar diameter		Length through hub or collar	Inner collar flange thickness	Inner flange collar thickness	Cladding thickness	Collar or raised face diameter	Bore of flange or collar	Bore of backing flange	Chamfer					
							C <sub>2</sub>	C <sub>1</sub>	11	12	14	21	04	07									12	14	04	05	07
10	16	95	66,5	16	4	M14	14,5	9	13	21	30	18	21	35	16	52	1,5	2	5	40	16,07	19	23	2	04	07	E
20	25	120	82,5	18	4	M16	16	11	13	31	38	27	31	40	16	57	1,5	2,5	5	58	25,08	28	33	2	04	07	
25	30	125	89	18	4	M16	17,5	11	15	36	49	32	36	40	18	62	1,5	2,5	5	68	30,08	33	38	3	04	07	
32	38	135	98,5	18	4	M16	19,5	12	16	45	59	40	45	40	20	65	1,5	2,5	5	78	38,08	41,5	47	3	04	07	
40	44,5	155	114,5	22	4	M20	21	13	18	51	65	46,5	51	28	22	68	1,5	2,5	6	88	46,6	48	53	3	04	07	
50	57	165	127	18	8	M16	22,5	13	19	67	78	59	67	28	23	70	2	3	6	102	57,23	62	69	3	04	07	
65	76,1	190	149	22	8	M20	25,5	15	22	103	90	78	86	32	25	76	2,5	3,5	6	122	76,33	81	89	3	04	07	
80	88,9	210	168,5	22	8	M20	29	14	23	114	108	91	—	36	50	79	2,5	3,5	7	138	89,18	94	—	3	04	07	
100	108	255	200	22	8	M20	32	16	27	137	135	110	—	40	50	86	3	4	7	158	108,38	113	—	3	04	07	
125	133	280	235	22	8	M20	35	18	28	160	164	135,5	—	44	50	98	3	4	7	188	133,63	138,5	—	4	04	07	
150	159	320	270	22	12	M20	37	20	30	186	192	161,5	—	48	50	98	3,5	4,5	9	212	159,63	164	—	4	04	07	
200	219,1	380	330	26	12	M24	41,5	—	30	246	246	222	—	50	50	111	4,5	6	9	268	220,03	225	—	5	04	07	
250	267/273	445	387,5	29,5	16	M27	48	—	36	296	269/275	—	—	58	50	117	5,5	7	9	320	268,13/274,13	278	—	5/7	04	07	
300	323,9	520	451	32,5	16	M30	51	—	42	360	—	327	—	68	50	130	7	8,5	11	370	325,03	330	—	7	04	07	
350	368	585	514,5	32,5	20	M30	54	—	46	430	—	371	—	78	50	143	8	9,5	11	430	369,13	374	—	7	04	07	
400	419	650	571,5	35,5	20	M33	57,5	—	52	480	—	422	—	82	50	146	9	10,5	12	482	420,13	426	—	7	04	07	
450	457,2	715	628,5	35,5	24	M33	60,5	—	54	540	—	460	—	86	50	159	9,5	11	12	530	458,33	465	—	7	04	07	
500	508	775	686	35,5	24	M33	63,5	—	56	595	—	511	—	90	50	162	11	12,5	12	585	509,13	517	—	7	04	07	
600	610	915	813	42	24	M39	70	—	58	710	—	613	—	105	60	168	13	14,5	14	685	611,13	618	—	9	04	07	

NOTES

- 1 For type 12 and type 14 flanges of all nominal sizes,  $\alpha = 4^\circ$  max.
- 2 Dimension  $E$  is given for information only.