

Steel, Carbon, Laminated Sheet, Surface Bonded

RATIONALE

AMS6387B results from a Five Year Review and update of this document.

1. SCOPE

1.1 Form

This specification covers steel in the form of laminated sheet.

1.2 Application

This material has been used typically for shims in which thickness is adjusted by removal of laminations as required, but usage is not limited to such applications.

1.3 Classification

Materials are classified as follows:

1.3.1 Type

Type I - All laminations

Type II - One half laminations

Type III - Three quarters laminations

1.3.2 Class

Class 1 - 0.002 inch (0.05 mm) thick laminations

Class 2 - 0.003 inch (0.075 mm) thick laminations

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2012 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: +1 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
<http://www.sae.org>

SAE WEB ADDRESS:

**SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/AMS6387B>**

2. APPLICABLE DOCUMENTS

The issue of the following documents in effect on the date of the purchase order forms a part of this specification to the extent specified herein. The supplier may work to a subsequent revision of a document unless a specific document issue is specified. When the referenced document has been cancelled and no superseding document has been specified, the last published issue of that document shall apply.

2.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

AMS5040 Steel, Sheet and Strip, 0.15 Carbon, Maximum, Deep Forming Grade

AMS5042 Steel, Sheet and Strip, 0.15 Carbon, Maximum Grade

AMS5044 Steel, Sheet and Strip, 0.15 Carbon, Maximum, Half Hard Temper

AMS5047 Steel, Sheet and Strip, 0.08 - 0.13C, Aluminum Killed (SAE 1010), Deep Forming Grade

2.2 American Society for Quality Publications

Available from American Society for Quality, 600 North Plankinton Avenue, Milwaukee, WI 53203, Tel: 800-248-1946 (United States or Canada) or +1-414-272-8575 (International), www.asq.org.

ANSI/ASQC Z1.4 Sampling Procedures and Tables for Inspection by Attributes

3. TECHNICAL REQUIREMENTS

3.1 Composition

3.1.1 Laminations

Shall conform to AMS5040, AMS5042, AMS5044 or AMS5047.

3.1.2 Adhesive

Shall be of a composition that will meet the fabrication and quality requirements of this specification.

3.2 Fabrication

The laminated shim stock shall consist completely of laminations each 0.002 inch \pm 0.0002 (0.05 mm \pm 0.005) thick or 0.003 inch \pm 0.0003 (0.08 mm \pm 0.008) thick, or partly of such laminations combined with a single thicker lamination, as ordered, bonded together by an adhesive such that individual laminations may be peeled for adjustment of shim thickness. The thickness of each layer of adhesive shall not exceed 0.0003 inch (0.008 mm).

3.2.1 Sheet shall be of the thicknesses and combinations of laminations and solid base shown in Table 1.

TABLE 1 - THICKNESS COMBINATIONS OF SHIM STOCK

Inch	mm	Type I Class 1 All Laminated, 0.002 in. (0.05 mm) Laminations	Type I Class 2 All Laminated, 0.003 in. (0.08 mm) Laminations	Type II Class 1 Half Solid, Half Laminated, 0.002 in. (0.05 mm) Laminations	Type II Class 2 Half Solid, Half Laminated, 0.003 in. (0.08 mm) Laminations	Type III Class 1 Three Quarters Solid, One Quarter Laminated, 0.002 in. (0.05 mm) Laminations	Type III Class 1 Three Quarters Solid, One Quarter Laminated, 0.003 in. (0.08 mm) Laminations
0.006	0.15	X					
0.008	0.20	X					
0.010	0.25	X					
0.012	0.31	X					
0.015	0.38	X	X				
0.016	0.41	X	X				
0.020	0.51	X	X				
0.021	0.53	X	X				
0.032	0.81	X	X				
0.033	0.84	X	X				
0.047	1.19	X	X				
0.048	1.22	X	X				
0.062	1.58	X	X	X	X		
0.063	1.60	X	X	X	X		
0.078	1.98	X	X	X	X		
0.080	2.03	X	X	X	X		
0.093	2.37	X	X	X	X		
0.094	2.39	X	X	X	X		
0.109	2.77	X	X	X	X		
0.121	3.07	X	X	X	X	X	X
0.125	3.18	X	X	X	X	X	X

3.2.2 Legacy Part Numbers

Legacy part numbers of the form M22499/4 plus dash number shall meet the following Type, Class and dimensions specified in Table 2. Tolerance of Length and Width shall be plus and minus 0.125 inch. In the event of any conflict between the requirements of Table 1 and Table 2, the requirements of Table 2 shall govern.

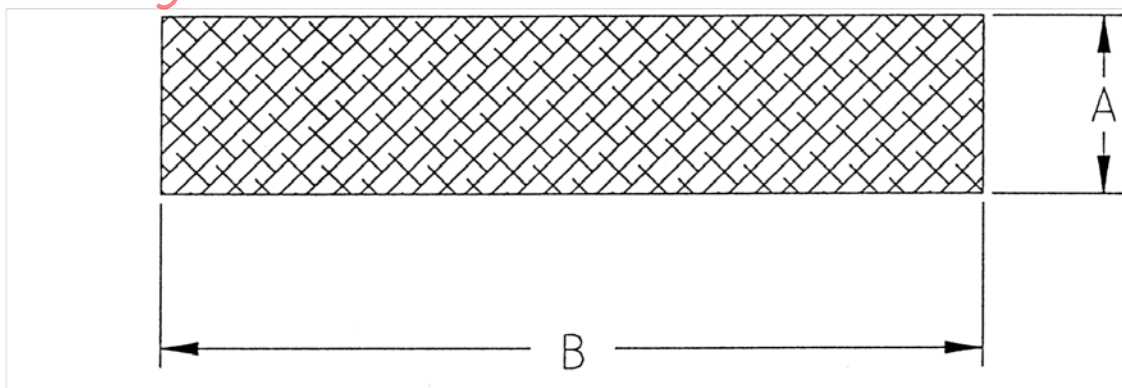


TABLE 2 - REQUIREMENTS FOR LEGACY PART NUMBERS

Dash No	A Thickness	B Width	Length Feet	Type	Class
001	0.010	8.000	4.000	I	1
003	0.016	6.000	3.000	I	1
005	0.024	8.000	2.000	I	1
007	0.032	6.000	3.000	I	1
009	0.062	6.000	3.000	I	1

3.3 Construction

3.3.1 General Requirements

Laminations and solid stock, when applicable, shall be bonded together throughout the whole surface area in a manner that will permit peeling of the laminations without the aid of mechanical devices, for adjustment of shim thickness, without separation of the remaining laminations and solid part. Laminations shall be bonded together in such a manner that any shape can be cut from the material using suitable tools, without separation. Laminations shall remain intact without separation during normal handling. Requirements shall be applicable to laminations not less than eight hours after completion of bonding.

3.3.2 Surface Roughness

Flat surfaces of laminations, and solid stock when applicable, shall have a maximum roughness of 63 RA (microinches) on original surfaces and on metallic surfaces after peeling.

3.3.3 Water Resistance

Sheet shall withstand total immersion in water at $120^{\circ}\text{F} \pm 3$ ($49^{\circ}\text{C} \pm 2$) for at least three hours without separation of laminations or any evidence of corrosion.

3.3.4 Peel Strength

Each individual lamination shall have a peel strength no less than 1 pound per inch of width (180 gm/cm of width) and no more than 5 pounds per inch of width (900 gm/cm of width), except at the solid/laminate bond line that may be higher.

3.3.5 The existence of the applicable type, class and nominal thickness shown in Table 1 is not intended to imply that all products described are commercially available. Only the products described in Table 2 have specific identification part numbers assigned to them.

3.4 Quality

Sheet, as received by purchaser, shall be uniform in quality and condition, sound, and free from foreign materials and from dents, creases, and other imperfections detrimental to usage of the sheet.

3.5 Thickness Tolerances

Shall be as specified in Table 3.

TABLE 3A - TOTAL THICKNESS TOLERANCES, INCH/POUND UNITS

Nominal Thickness Inches	Tolerance, Inch Plus	Tolerance, Inch Minus
Up to 0.008, incl	0.001	0.0005
Over 0.008 to 0.010, incl	0.0015	0.0005
Over 0.010 to 0.016, incl	0.0015	0.001
Over 0.016 to 0.021, incl	0.002	0.001
Over 0.021 to 0.033, incl	0.003	0.002
Over 0.033 to 0.048, incl	0.005	0.002
Over 0.048 to 0.063, incl	0.006	0.002
Over 0.063 to 0.080, incl	0.007	0.002
Over 0.080 to 0.094, incl	0.009	0.003
Over 0.094 to 0.109, incl	0.010	0.003
Over 0.109 to 0.125, incl	0.012	0.003
Over 0.125 to 0.156, incl	0.015	0.003
Over 0.156 to 0.187, incl	0.018	0.003
Over 0.187 to 0.190, incl	0.018	0.005

TABLE 3B - TOTAL THICKNESS TOLERANCES, SI UNITS

Nominal Thickness Millimeters	Tolerance, Millimeter Plus	Tolerance, Millimeter Minus
Up to 0.20, incl	0.025	0.013
Over 0.20 to 0.25, incl	0.038	0.013
Over 0.25 to 0.41, incl	0.038	0.025
Over 0.41 to 0.53, incl	0.05	0.025
Over 0.53 to 0.84, incl	0.08	0.05
Over 0.84 to 1.22, incl	0.13	0.05
Over 1.22 to 1.60, incl	0.15	0.05
Over 1.60 to 2.03, incl	0.18	0.05
Over 2.03 to 2.39, incl	0.23	0.08
Over 2.39 to 2.77, incl	0.25	0.08
Over 2.77 to 3.18, incl	0.30	0.08
Over 3.18 to 3.96, incl	0.38	0.08
Over 3.96 to 4.75, incl	0.46	0.08
Over 4.75 to 4.83, incl	0.46	0.13

3.6 Quality

The shim stock shall be uniform in quality, clean, and free of defects detrimental to functional performance of the material.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspection

The vendor of sheet shall supply all samples for vendor's tests and shall be responsible for the performance of all required tests. Purchaser reserves the right to sample and to perform any confirmatory testing deemed necessary to ensure that the sheet conforms to specified requirements.

4.2 Classification of Tests

All technical requirements are acceptance tests and shall be performed on each heat or lot as applicable.