

REV. C

AS1733

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

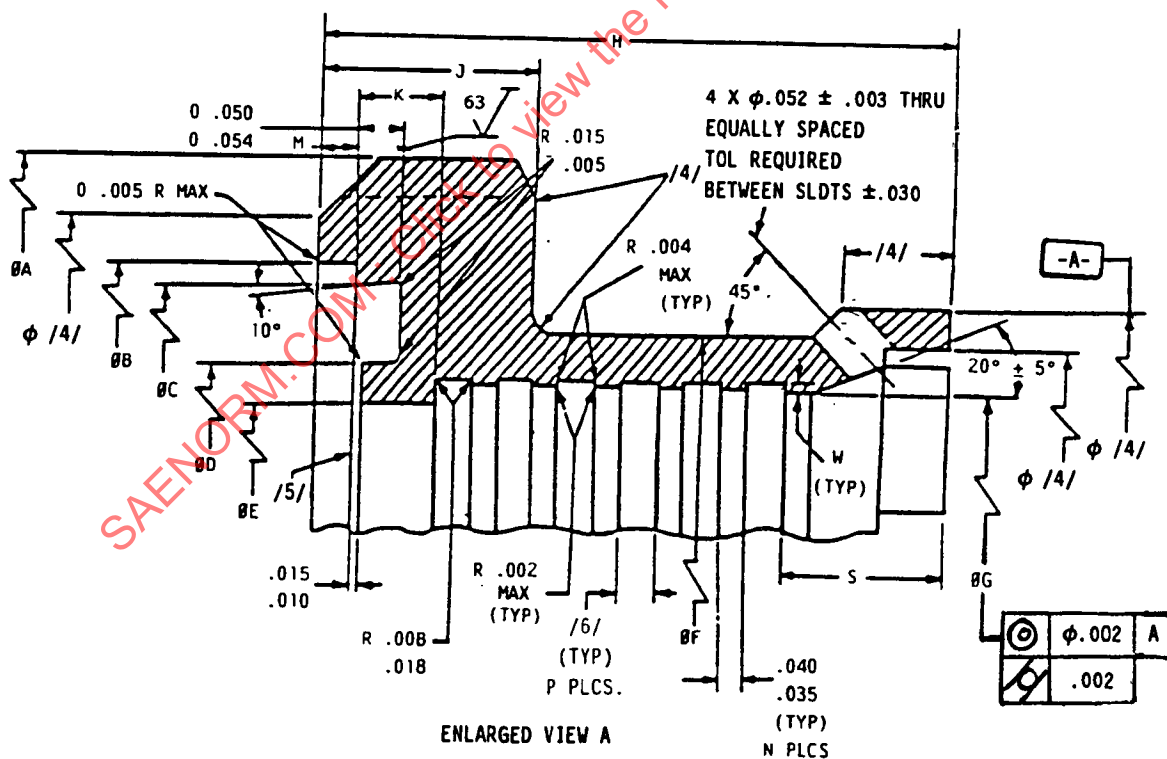
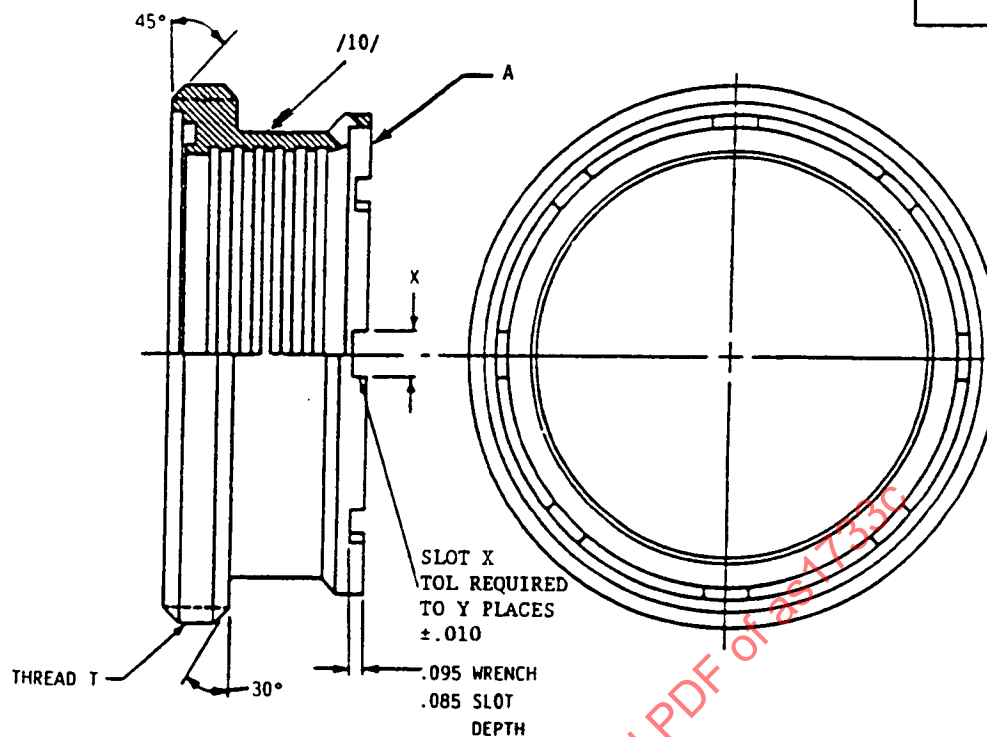


FIGURE 1 - BODY

PROCUREMENT SPECIFICATION: /3/ /12/ AS1730

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

BODY, COUPLING, RIGID,
FIXED CAVITY, THREADED,
FERRULE TYPE TUBE ENDS, TYPE II

AS1733

SHEET 1 OF 4

REV.

C

TABLE 1 - BODY DIMENSIONS

BASIC NO. AS1733 SIZE CODE	(TUBE SIZE)	THREAD T PER H28/2	A +.005/- .000	B +.005/- .000	C +.010/- .000	D +.000/- .010	E +.005/- .000	F +.005/- .000	G TOL	H
04	.250	.687-12 UN-2A	.680	.529	.480	.298	.233	.375	.254	+.005/- .000 .720
05	.312	.750-12 UN-2A	.743	.580	.535	.353	.295	.437	.316	+.005/- .000 .720
06	.375	.812-12 UN-2A	.805	.635	.590	.408	.358	.500	.379	+.005/- .000 .720
08	.500	.937-12 UN-2A	.930	.762	.716	.534	.483	.625	.504	+.005/- .000 .720
10	.625	1.062-12 UN-2A	1.055	.900	.850	.668	.609	.750	.630	+.005/- .000 .735
12	.750	1.250-12 UNF-2A	1.243	1.033	.984	.802	.734	.890	.755	+.005/- .000 .735
16	1.000	1.500-12 UNF-2A	1.493	1.284	1.235	1.053	.984	1.142	1.005	+.005/- .000 .735
20	1.250	1.750-12 UN-2A	1.743	1.534	1.485	1.303	1.235	1.392	1.256	+.005/- .000 .735
24	1.500	2.000-12 UN-2A	1.993	1.783	1.735	1.553	1.480	1.642	1.506	+.005/- .000 .825
28	1.750	2.250-12 UN-2A	2.243	2.045	1.965	1.783	1.730	1.895	1.756	+.005/- .000 .835
32	2.000	2.500-12 UN-2A	2.493	2.292	2.235	2.053	1.981	2.145	2.006	+.005/- .000 .835
36	2.250	2.750-12 UN-2A	2.743	2.545	2.485	2.283	2.231	2.395	2.257	+.005/- .000 .835
40	2.500	3.000-12 UN-2A	2.993	2.800	2.713	2.531	2.481	2.645	2.507	+.005/- .000 .835
44	2.750	3.250-12 UN-2A	3.243	3.045	2.961	2.781	2.731	2.895	2.757	+.005/- .000 .835
48	3.000	3.625-12 UN-2A	3.618	3.395	3.340	3.158	2.979	3.145	3.007	+.005/- .000 .785
56	3.500	4.125-12 UN-2A	4.118	3.895	3.840	3.658	3.479	3.645	3.509	+.005/- .000 .785
64	4.000	4.625-12 /7/	4.625	4.395	4.340	4.158	3.979	4.155	4.009	+.005/- .000 .770
72	4.500	5.125-12 /7/	5.103	4.895	4.840	4.658	4.479	4.655	4.509	+.006/- .000 .950
80	5.000	5.625-12 /7/	5.602	5.378	5.325	5.143	4.979	5.155	5.009	+.006/- .000 .950

AS1733

REV.
C

TABLE 2 - BODY DIMENSIONS AND DESIGN INFORMATION

BASIC NO. AS1733 SIZE CODE	J	K LENGTH	K TOL	M	N PLACES LAND	P PLACES GROOVE	S +.020/- .010	W	X	Y PLACES	(O-RINGS DASH NO) /B/	WEIGHT	
												MAX	LB
04	.234	.090	+.005/- .000	.045	4	5	.210	.008/.010	.125	4	.012	.008	
05	.234	.090	+.005/- .000	.045	4	5	.210	.008/.010	.125	4	.013	.009	
06	.234	.090	+.005/- .000	.045	4	5	.210	.008/.010	.125	4	.014	.011	
08	.234	.090	+.005/- .000	.045	4	5	.210	.008/.010	.125	4	.016	.014	
10	.250	.100	±.010	.045	4	5	.225	.008/.010	.125	8	.018	.017	
12	.250	.100	±.010	.045	4	5	.225	.008/.010	.187	8	.020	.022	
16	.250	.100	±.010	.045	4	5	.225	.008/.010	.187	8	.022	.025	
20	.250	.100	±.010	.045	4	5	.225	.008/.010	.187	8	.028	.033	
24	.250	.100	±.010	.045	5	6	.225	.008/.010	.187	8	.030	.041	
28	.250	.100	±.010	.075	5	6	.205	.008/.010	.250	8	.032	.046	
32	.250	.105	±.010	.075	5	6	.205	.008/.010	.250	8	.034	.052	
36	.279	.110	±.010	.075	5	6	.205	.008/.010	.250	8	.036	.060	
40	.279	.110	±.010	.075	5	6	.205	.008/.010	.250	8	.038	.067	
44	.279	.110	±.010	.075	5	6	.205	.008/.010	.250	8	.040	.092	
48	.309	.060	±.010	.075	5	6	.205	.008/.010	.250	8	.042	.092	
56	.309	.060	±.010	.075	5	6	.205	.014/.016	.250	8	.044	.105	
64	.309	.100	±.010	.075	4	5	.230	.014/.016	.250	8	.046	.118	
72	.409	.100	±.010	.075	6	7	.260	.020/.024	.250	8	.048	.196	
80	.409	.100	±.010	.075	6	7	.260	.020/.024	.250	8	.050	.229	