

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS39029/91

FEDERAL SUPPLY CLASS
5935

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-C-39029/91A, AMENDMENT 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-C-39029/91A, AMENDMENT 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as39029_91

THIRD ANGLE PROJECTION



ISSUED 2001-03

PREPARED BY SAE SUBCOMMITTEE AE-8C1


SAE The Engineering Society
For Advancing Mobility
INTERNATIONAL
Land Sea Air and Space®
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

CONTACT, ELECTRICAL CONNECTOR,
CONCENTRIC TWINAX, SOCKET, SHIELDED, SIZE 8

AS39029/91
SHEET 1 OF 8

THE COMPLETE REQUIREMENTS FOR ACQUIRING THE CONTACT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION AND THE LATEST ISSUE OF MIL-C-39029.

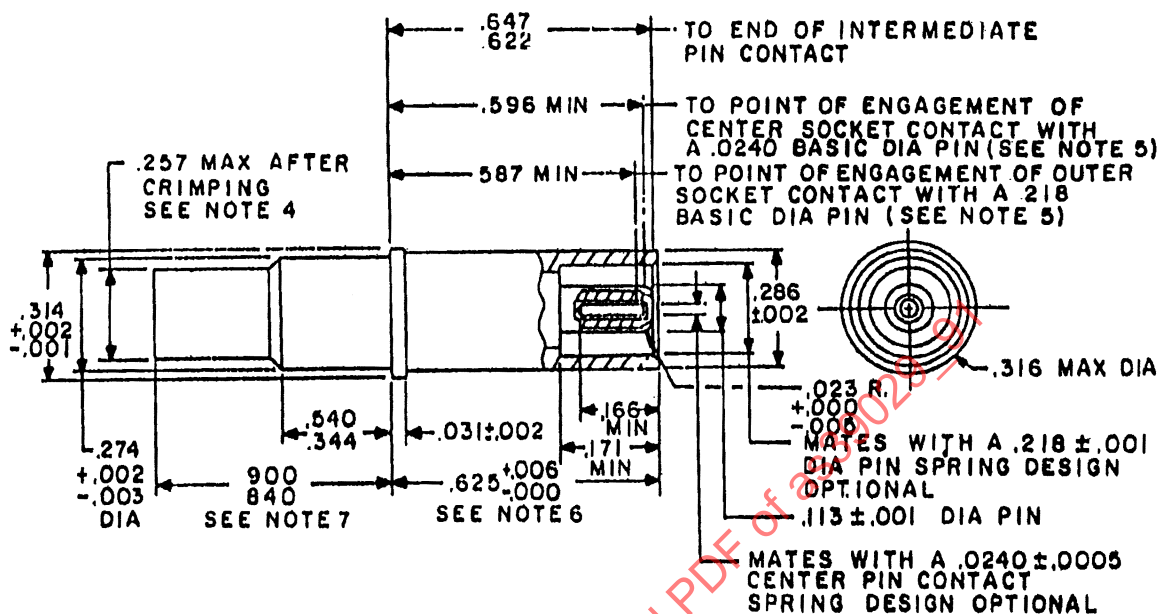

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.0005	0.013	.0240	0.610	.257	6.53	.540	13.72
.001	0.03	.031	0.79	.274	6.96	.587	14.91
.002	0.05	.113	2.78	.286	7.26	.596	15.14
.005	0.13	.166	2.95	.314	7.98	.622	15.80
.006	0.15	.171	4.34	.316	8.03	.625	15.88
.023	0.58	.210	5.54	.344	8.74	.647	16.43
						.840	21.34
						.900	22.86

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions shown apply after plating.
4. Diameter shall not exceed .276 (7.01 mm) over recovered heat shrink tubing.
5. Point at which a square ended pin of the same basic diameter as the mating contact spring. Provisions for clearance hole shall be provided for outer contact test pin.
6. Dielectric protrusion shall be not greater than .035".
7. Measurement shall be taken after assembly and shall include the crimp ferrule.


FIGURE 1. CONCENTRIC TWINAX CONTACT.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

INCHES	MM	INCHES	MM
.001	0.03	.092	2.34
.002	0.05	.113	2.87
.003	0.08	.145	3.68
.004	0.10	.150	3.81
.005	0.13	.170	4.32
.020	0.51	.180	4.57
.023	0.58	.189	4.80
.025	0.64	.193	4.90
.028	0.71	.647	16.43
.0715	1.816	.700	17.78

FIGURE 2. INTERMEDIATE PIN CONTACT.

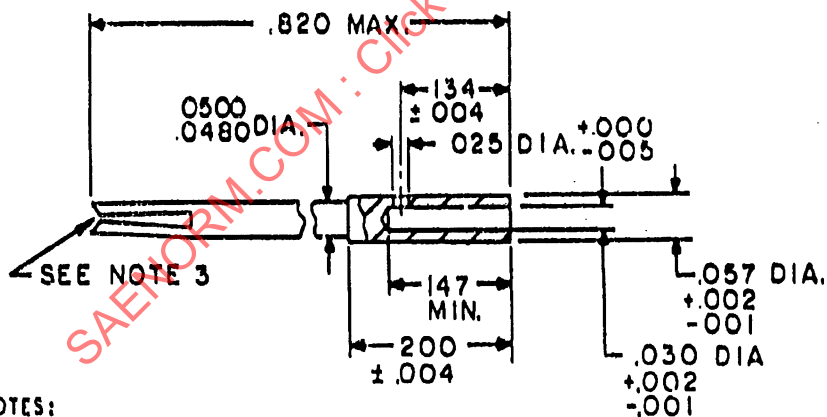


- NOTES:**

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Socket must mate with 0.0240±.0005 pin. Closed entry may be provided either by an integral part of contact design or by the surrounding dielectric material.

INCHES	MM
.001	0.03
.002	0.05
.004	0.10
.005	0.13
.025	0.64
.030	0.76
.0480	1.220
.0500	1.270
.057	1.45
.134	3.40
.147	3.73
.200	5.08
.820	20.83

FIGURE 3. CENTER SOCKET CONTACT.

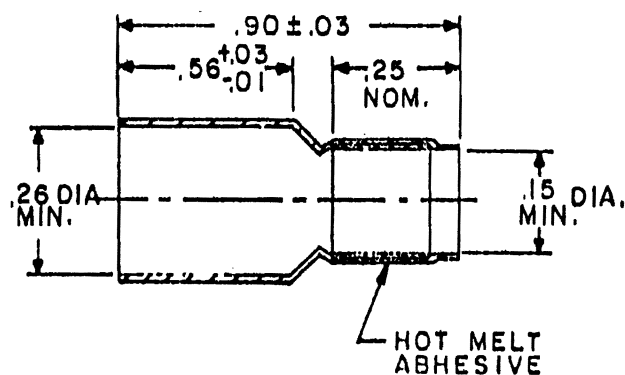

INCHES	MM
.01	0.3
.03	0.8
.15	3.8
.25	6.4
.26	6.6
.56	14.2
.90	22.9

NOTES:

1. Dimension are in inches.
2. Metric equivalents are given for general information only.

FIGURE 4. HEAT SHRINK BOOT.

REQUIREMENTS:

Qualification: Contacts shall comply with reliability assurance provisions of MIL-STD-790 as specified in MIL-C-38999.

Design and construction:

Dimensions and configuration: See figures 1 through 4 and table I.

TABLE I. DESIGN CHARACTERISTICS.

BIN code	Color bands			Contact cavity size	Cable accommodated	Type	Class
	1st	2nd	3rd				
530	Green	Orange	Black	A	M17/176-00002	D	B

Assembly procedure: Manufacturer's recommended assembly instructions shall be shipped with unit package.

Material:

Heat shrink boot: Shall be in accordance with MIL-I-23053/8.

Electrical:

Low signal level contact resistance (center and intermediate contacts only): See table II.

Contact resistance: See table III.

Frequency: 0 to 20 MHz (operating frequency range).

Voltage rating: 500 volts rms maximum; working voltage at sea level, 125 volts rms maximum at 70,000 feet.

TABLE II. LOW SIGNAL LEVEL CONTACT RESISTANCE (CENTER AND INTERMEDIATE CONTACTS ONLY).

DIN code	Cable accommodated	Maximum contact resistance (milliohms)	
		Initial	After conditioning
530	M17/176-00002	55	66

TABLE III. CONTACT RESISTANCE.

DIN code	Contact	Cable accommodated	Test current (amperes)	Maximum voltage drop (millivolts)		
				25°C, +3°C, -0°C		+175°C, +3°C, -0°C
				Initial	After conditioning	After conditioning
530	Center	M17/176-00002	1.0	55	66	94
530	Intermediate	M17/176-00002	1.0	55	66	94
530	Outer	M17/176-00002	12.0	75	90	120

Dielectric withstanding voltage: Shall be as specified in table IV.

TABLE IV. DIELECTRIC WITHSTANDING VOLTAGE.

Contacts	Altitude	Test voltages ac rms
Center to intermediate	Sea level	1000
Intermediate to outer	Sea level	500

Mating contact: Shall be in accordance with MIL-C-39039/90.

Mechanical:

Contact engagement and separation force (socket contacts only): The engagement depth shall be a minimum of 0.7 of the minimum socket bore. The test pins shall be in accordance with MS3197, except the diameters shall be as specified in table V. Provision for clearance hole on outer contact. Test pins shall be provided. The test pins shall be in accordance with MS3197, except the diameters shall be as specified in table V.

TABLE V. CONTACT ENGAGEMENT AND SEPARATION FORCE.

Test pin diameter (inch)	Minimum separation force (ounces)		Maximum engagement force (ounces)		Maximum average engagement force
	Initial	After conditioning	Initial	After conditioning	
.2190 $\pm .0000$ -.0001	NA	NA	48	60	NA
.2170 $\pm .0001$ -.0000	3.0	2.0	NA	NA	NA
.0245 $\pm .0000$ -.0001	NA	NA	12	14	NA
.0235 $\pm .0001$ -.0000	0.5	0.4	NA	NA	NA

Crimp tensile strength (center, intermediate, and outer contact crimp joint): See table VI.

TABLE VI. CRIMP TENSILE STRENGTH (AT AMBIENT).

DIN code	Cable accommodated	Axial load (pounds, minimum)		
		Center contact	Intermediate contact	Outer contact
530	M17/176-00002	9	8	25