

AS4662

FEDERAL SUPPLY CLASS
4730


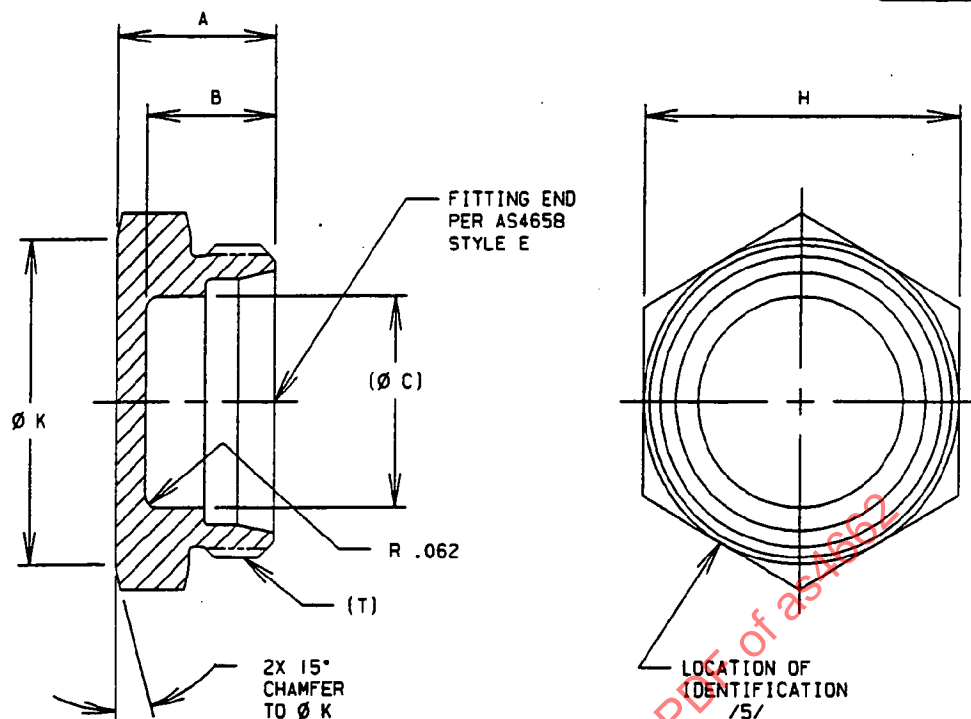


FIGURE 1 - PLUG, SHORT FLARELESS

TABLE 1 - DIMENSIONS AND WEIGHTS

BASIC NO. AS4662	(NOMINAL TUBE SIZE)	T THREAD PER MIL-S-8879	A	B	C	H	K	LB/EA MAX CRES	LB/EA MAX TI	LB/EA MAX ALUM
20	1.250	1.5625-12 UNJ	.838	.628	1.093	1.615-1.630	1.605	.349	.199	.125
24	1.500	1.8125-12 UNJ	.901	.626	1.344	1.865-1.880	1.855	.475	.272	.172
28	1.750	2.1250-12 UNJ	.901	.601	1.579	2.240-2.260	2.230	.829	.474	.299

THIRD ANGLE PROJECTION



CUSTODIAN: SAE G-3/G-3B

PROCUREMENT SPECIFICATION: /4/ MIL-F-18280

SAE The Engineering Society
For Advancing Mobility
Land Sea Air and Space
INTERNATIONAL

400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

PLUG, SHORT FLARELESS

AS4662

SHEET 1 OF 2

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

ISSUED 1992-05-22 REVISED