

REV.
A

AS85049/10

FEDERAL SUPPLY CLASS
5935

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION: AS85049.


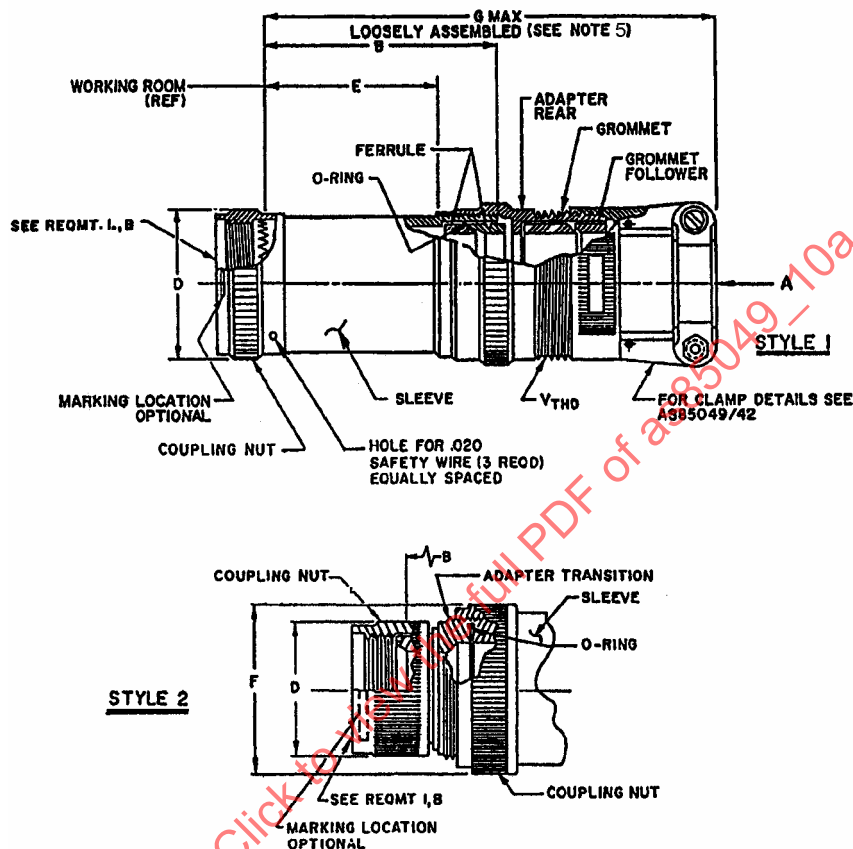


FIGURE 1 - CONFIGURATION AND DIMENSIONS

THIRD ANGLE PROJECTION



CUSTODIAN: SAE AE-8/AE-8C1

SAE Aerospace
An SAE International Group**AEROSPACE STANDARD**

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL,
ENVIRONMENTAL, CABLE SEALING, STRAIGHT, SHIELD TERMINATION,
CATEGORY 1A (FOR MIL-DTL-5015 CRIMP, MIL-DTL-26482 SERIES 2,
AS81703 SERIES 3, AND MIL-DTL-83723 SERIES III CONNECTORS)

AS85049/10
SHEET 1 OF 22**REV.**
A

Copyright © 2004 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)
Email: custsvc@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 2001-07 REVISED 2004-10

TABLE 1 - DIMENSIONS

DASH NO .	FITS SHELL OF CONNECTOR				CLAMP SIZE	A (SEE NOTE 6)		STYLE	B ±.125	D DIA MAX
	AS81703 SER 3	MIL-DTL- 26482 SER 2	MIL-DTL- 5015 CRIMP	MIL-DTL- 83723 SER III		WIRE BUNDLE ACCOMMODATION RANGE				
						MIN	MAX			
01	3	--	--	--	4	.125	.250	1	2.00	.669
02	3	--	--	--	4	.125	.250	1	3.00	.669
03	3	--	--	--	6	.250	.437	2	2.75	.669
04	3	--	--	--	6	.250	.437	2	3.75	.669
05	--	8	8S	8	4	.125	.250	1	2.00	.617
06	--	8	8S	8	4	.125	.250	1	3.00	.617
07	--	8	8S	8	6	.250	.437	2	2.75	.617
08	--	8	8S	8	6	.250	.437	2	3.75	.617
09	--	10	10S,10SL	10	4	.125	.312	1	2.00	.734
10	--	10	10S,10SL	10	4	.125	.312	1	3.00	.734
11	--	10	10S,10SL	10	6	.250	.437	2	2.75	.734
12	--	10	10S,10SL	10	6	.250	.437	2	3.75	.734
13	7	12	12,12S	12	6	.250	.437	1	2.00	.858
14	7	12	12,12S	12	6	.250	.437	1	3.00	.858
15	7	12	12,12S	12	10	.350	.625	2	2.75	.858
16	7	12	12,12S	12	10	.350	.625	2	3.75	.858
17	12	14	14,14S	14	10	.350	.575	1	2.00	.984
18	12	14	14,14S	14	10	.350	.575	1	3.00	.984
19	12	14	14,14S	14	12	.500	.750	2	2.75	.984
20	12	14	14,14S	14	12	.500	.750	2	3.75	.984

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO.	E REF	V THREAD CLASS 2A	F DIA MAX	G MAX
01	1.06	.625-24 UNEF	--	4.28
02	2.06	.625-24 UNEF	--	5.28
03	1.81	.750-20 UNEF	.858	5.02
04	2.81	.750-20 UNEF	.858	6.02
05	1.06	.625-24 UNEF	--	4.28
06	2.06	.625-24 UNEF	--	5.28
07	1.81	.750-20 UNEF	.858	5.02
08	2.81	.750-20 UNEF	.858	6.02
09	1.06	.625-24 UNEF	--	4.28
10	2.06	.625-24 UNEF	--	5.28
11	1.81	.750-20 UNEF	.858	5.02
12	2.81	.750-20 UNEF	.858	6.02
13	1.06	.750-20 UNEF	--	4.26
14	2.06	.750-20 UNEF	--	5.26
15	1.67	1.000-20 UNEF	1.112	5.02
16	2.67	1.000-20 UNEF	1.112	6.02
17	0.92	1.000-20 UNEF	--	4.26
18	1.92	1.000-20 UNEF	--	5.26
19	1.67	1.1875-18 UNEF	1.218	5.08
20	2.87	1.1875-18 UNEF	1.218	6.08

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO .	FITS SHELL OF CONNECTOR				CLAMP SIZE	A (SEE NOTE 6)		STYLE	B ±.125	D DIA MAX
	AS81703 SER 3	MIL-DTL- 26482 SER 2	MIL-DTL- 5015 CRIMP	MIL-DTL- 83723 SER III		WIRE BUNDLE ACCOMMODATION RANGE				
						MIN	MAX			
21	19	16	16,16S	16	12	.500	.700	1	2.00	1.112
22	19	16	16,16S	16	12	.500	.700	1	3.00	1.112
23	19	16	16,16S	16	16	.625	.937	2	2.75	1.112
24	19	16	16,16S	16	16	.625	.937	2	3.75	1.112
25	27	18	18	18	10	.350	.625	1	2.00	1.218
26	27	18	18	18	10	.350	.625	1	3.00	1.218
27	27	18	18	18	12	.500	.750	1	2.00	1.218
28	27	18	18	18	12	.500	.750	1	3.00	1.218
29	27	18	18	18	16	.625	.937	2	2.75	1.218
30	27	18	18	18	16	.625	.937	2	3.75	1.218
31	37	20	20	20	10	.350	.625	1	3.00	1.345
32	37	20	20	20	10	.350	.625	1	4.00	1.345
33	37	20	20	20	12	.500	.750	1	3.00	1.345
34	37	20	20	20	12	.500	.750	1	4.00	1.345
35	37	20	20	20	16	.625	.937	2	3.75	1.345
36	37	20	20	20	16	.625	.937	2	4.75	1.345
37	37	20	20	20	20	.875	1.250	2	3.75	1.345
38	37	20	20	20	20	.875	1.250	2	4.75	1.345
39	--	22	22	22	10	.350	.625	1	3.00	1.468
40	--	22	22	22	10	.350	.625	1	4.00	1.468

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO.	E REF	V THREAD CLASS 2A	F DIA MAX	G MAX
21	0.92	1.1875-18 UNEF	--	4.33
22	1.92	1.1875-18 UNEF	--	5.33
23	1.67	1.4375-18 UNEF	1.468	5.17
24	2.67	1.4375-18 UNEF	1.468	6.17
25	0.92	1.000-20 UNEF	--	4.26
26	1.92	1.000-20 UNEF	--	5.26
27	0.92	1.1875-18 UNEF	--	4.33
28	1.92	1.1875-18 UNEF	--	5.33
29	1.67	1.4375-18 UNEF	1.468	5.17
30	2.67	1.4375-18 UNEF	1.468	6.17
31	1.92	1.000-20 UNEF	--	5.26
32	2.92	1.000-20 UNEF	--	6.26
33	1.92	1.1875-18 UNEF	--	5.33
34	2.92	1.1875-18 UNEF	--	6.33
35	2.67	1.4375-18 UNEF	1.468	6.17
36	3.67	1.4375-18 UNEF	1.468	7.17
37	2.67	1.750-18 UNS	1.969	6.32
38	3.67	1.750-18 UNS	1.969	7.32
39	1.92	1.000-20 UNEF	--	5.26
40	2.92	1.000-20 UNEF	--	6.26

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO .	FITS SHELL OF CONNECTOR				CLAMP SIZE	A (SEE NOTE 6)		STYLE	B ±.125	D DIA MAX
	AS81703 SER 3	MIL-DTL- 26482 SER 2	MIL-DTL- 5015 CRIMP	MIL-DTL- 83723 SER III		WIRE BUNDLE ACCOMMODATION RANGE				
						MIN	MAX			
41	--	22	22	22	12	.500	.750	1	3.00	1.468
42	--	22	22	22	12	.500	.750	1	4.00	1.468
43	--	22	22	22	16	.625	.937	1	3.00	1.468
44	--	22	22	22	16	.625	.937	1	4.00	1.468
45	--	22	22	22	20	.875	1.250	2	3.75	1.468
46	--	22	22	22	20	.875	1.250	2	4.75	1.468
47	--	24	24	24	12	.500	.750	1	3.00	1.593
48	--	24	24	24	12	.500	.750	1	4.00	1.593
49	--	24	24	24	16	.625	.812	1	3.00	1.593
50	--	24	24	24	16	.625	.812	1	4.00	1.593
51	--	24	24	24	16	.625	.937	1	3.00	1.593
52	--	24	24	24	16	.625	.937	1	4.00	1.593
53	--	24	24	24	20	.875	1.250	2	3.75	1.593
54	--	24	24	24	20	.875	1.250	2	4.75	1.593
55	--	--	28	--	12	.500	.750	1	3.00	1.969
56	--	--	28	--	12	.500	.750	1	4.00	1.969
57	--	--	28	--	16	.625	.937	1	3.00	1.969
58	--	--	28	--	16	.625	.937	1	4.00	1.969
59	--	--	28	--	20	.875	1.250	1	3.00	1.969
60	--	--	28	--	20	.875	1.250	1	4.00	1.969

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO.	E REF	V THREAD CLASS 2A	F DIA MAX	G MAX
41	1.92	1.1875-18 UNEF	-	5.33
42	2.92	1.1875-18 UNEF	-	6.33
43	1.92	1.4375-18 UNEF	-	5.42
44	2.92	1.4375-18 UNEF	-	6.42
45	2.67	1.750-18 UNS	1.969	6.26
46	3.67	1.750-18 UNS	1.969	7.26
47	1.92	1.1875-18 UNEF	-	5.33
48	2.92	1.1875-18 UNEF	-	6.33
49	1.92	1.4375-18 UNEF	-	5.42
50	2.92	1.4375-18 UNEF	-	6.42
51	1.92	1.4375-18 UNEF	-	5.42
52	2.92	1.4375-18 UNEF	-	6.42
53	2.67	1.750-18 UNS	1.969	6.26
54	3.67	1.750-18 UNS	1.969	7.26
55	1.92	1.1875-18 UNEF	-	5.34
56	2.92	1.1875-18 UNEF	-	6.34
57	1.92	1.4375-18 UNEF	-	5.42
58	2.92	1.4375-18 UNEF	-	6.42
59	1.92	1.750-18 UNS	-	5.57
60	2.92	1.750-18 UNS	-	6.57

SAENORM.COM : Click to view the full PDF of as85049/10a

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO .	FITS SHELL OF CONNECTOR				CLAMP SIZE	A (SEE NOTE 6)		STYLE	B ±.125	D DIA MAX
	AS81703 SER 3	MIL-DTL- 26482 SER 2	MIL-DTL- 5015 CRIMP	MIL-DTL- 83723 SER III		WIRE BUNDLE ACCOMMODATION RANGE				
						MIN	MAX			
61	--	--	28	--	24	1.000	1.375	1	3.00	1.969
62	--	--	28	--	24	1.000	1.375	1	4.00	1.969
63	--	--	32	--	16	.625	.937	1	3.00	2.219
64	--	--	32	--	16	.625	.937	1	4.00	2.219
65	--	--	32	--	20	.875	1.250	1	3.00	2.219
66	--	--	32	--	20	.875	1.250	1	4.00	2.219
67	--	--	32	--	24	1.000	1.375	1	3.00	2.219
68	--	--	32	--	24	1.000	1.375	1	4.00	2.219
69	--	--	32	--	28	1.250	1.625	1	3.00	2.219
70	--	--	32	--	28	1.250	1.625	1	4.00	2.219
71	--	--	36	--	20	.875	1.250	1	4.00	2.469
72	--	--	36	--	20	.875	1.250	1	5.00	2.469
73	--	--	36	--	24	1.000	1.375	1	4.00	2.469
74	--	--	36	--	24	1.000	1.375	1	5.00	2.469
75	--	--	36	--	28	1.250	1.625	1	4.00	2.469
76	--	--	36	--	28	1.250	1.625	1	5.00	2.469
77	--	--	36	--	32	1.437	1.875	2	4.88	2.469
78	--	--	36	--	32	1.437	1.875	2	5.88	2.469
79	--	--	40	--	20	.875	1.250	1	4.00	2.719
80	--	--	40	--	20	.875	1.250	1	5.00	2.719

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO.	E REF	V THREAD CLASS 2A	F DIA MAX	G MAX
61	1.92	2.000-18 UNS	--	5.60
62	2.92	2.000-18 UNS	--	6.60
63	1.92	1.4375-18 UNEF	--	5.42
64	2.92	1.4375-18 UNEF	--	6.42
65	1.92	1.750-18 UNS	--	5.57
66	2.92	1.750-18 UNS	--	6.57
67	1.92	2.000-18 UNS	--	5.60
68	2.92	2.000-18 UNS	--	6.60
69	1.92	2.250-16 UN	--	5.86
70	2.92	2.250-16 UN	--	6.86
71	2.92	1.750-18 UNS	--	6.57
72	3.92	1.750-18 UNS	--	7.57
73	2.92	2.000-18 UNS	--	6.60
74	3.92	2.000-18 UNS	--	7.60
75	2.92	2.250-16 UN	--	6.86
76	3.92	2.250-16 UN	--	7.86
77	3.80	2.500-16 UN	2.719	7.70
78	4.80	2.500-16 UN	2.719	8.70
79	2.92	1.750-18 UNS	--	6.57
80	3.92	1.750-18 UNS	--	7.57

SAENORM.COM : Click to view the full PDF of as85049/10a

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO .	FITS SHELL OF CONNECTOR				CLAMP SIZE	A (SEE NOTE 6)		STYLE	B ±.125	D DIA MAX
	AS81703 SER 3	MIL-DTL- 26482 SER 2	MIL-DTL- 5015 CRIMP	MIL-DTL- 83723 SER III		WIRE BUNDLE ACCOMMODATION RANGE				
						MIN	MAX			
81	--	--	40	--	24	1.000	1.375	1	4.00	2.719
82	--	--	40	--	24	1.000	1.375	1	5.00	2.719
83	--	--	40	--	28	1.250	1.625	1	4.00	2.719
84	--	--	40	--	28	1.250	1.625	1	5.00	2.719
85	--	--	40	--	32	1.437	1.875	1	4.00	2.719
86	--	--	40	--	32	1.437	1.875	1	5.00	2.719
87	--	--	44	--	20	.875	1.250	1	4.00	2.969
88	--	--	44	--	20	.875	1.250	1	5.00	2.969
89	--	--	44	--	24	1.000	1.375	1	4.00	2.969
90	--	--	44	--	24	1.000	1.375	1	5.00	2.969
91	--	--	44	--	28	1.250	1.625	1	4.00	2.969
92	--	--	44	--	28	1.250	1.625	1	5.00	2.969
93	--	--	44	--	32	1.437	1.875	1	4.00	2.969
94	--	--	44	--	32	1.437	1.875	1	5.00	2.969
95	--	--	48	--	20	.875	1.250	1	4.00	3.219
96	--	--	48	--	20	.875	1.250	1	5.00	3.219
97	--	--	48	--	24	1.000	1.375	1	4.00	3.219
98	--	--	48	--	24	1.000	1.375	1	5.00	3.219
99	--	--	48	--	28	1.250	1.625	1	4.00	3.219
100	--	--	48	--	28	1.250	1.625	1	5.00	3.219

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO.	E REF	V THREAD CLASS 2A	F DIA MAX	G MAX
81	2.92	2.000-18 UNS	--	6.60
82	3.92	2.000-18 UNS	--	7.60
83	2.92	2.250-16 UN	--	7.07
84	3.92	2.250-16 UN	--	8.07
85	2.92	2.500-16 UN	--	7.12
86	3.92	2.500-16 UN	--	8.12
87	2.92	1.750-18 UNS	--	6.75
88	3.92	1.750-18 UNS	--	7.75
89	2.92	2.000-18 UNS	--	6.60
90	3.92	2.000-18 UNS	--	7.60
91	2.92	2.250-16 UN	--	7.07
92	3.92	2.250-16 UN	--	8.07
93	2.92	2.500-16 UN	--	7.12
94	3.92	2.500-16 UN	--	8.12
95	2.92	1.750-18 UNS	--	6.75
96	3.92	1.750-18 UNS	--	7.75
97	2.92	2.000-18 UNS	--	6.60
98	3.92	2.000-18 UNS	--	7.60
99	2.92	2.250-16 UN	--	7.07
100	3.92	2.250-16 UN	--	8.07

SAENORM.COM : Click to view the full PDF of as85049/10a

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO .	FITS SHELL OF CONNECTOR				CLAMP SIZE	A (SEE NOTE 6)		STYLE	B ±.125	D DIA MAX
	AS81703 SER 3	MIL-DTL- 26482 SER 2	MIL-DTL- 5015 CRIMP	MIL-DTL- 83723 SER III		WIRE BUNDLE ACCOMMODATION RANGE				
						MIN	MAX			
101	--	--	48	--	32	1.437	1.875	1	4.00	3.219
102	--	--	48	--	32	1.437	1.875	1	5.00	3.219
103	61	--	--	--	12	.500	.750	1	3.00	1.653
104	61	--	--	--	12	.500	.750	1	4.00	1.653
105	61	--	--	--	16	.625	.937	1	3.00	1.653
106	61	--	--	--	16	.625	.937	1	4.00	1.653
107	61	--	--	--	20	.875	1.250	2	3.75	1.653
108	61	--	--	--	20	.875	1.250	2	4.75	1.653
109	61	--	--	--	24	1.000	1.375	2	3.75	1.653
110	61	--	--	--	24	1.000	1.375	2	4.75	1.653
111	7	12	12,12S	12	10	.350	.500	1	2.00	.858
112	19	16	16,16S	16	6	.250	.437	1	2.00	1.112
113	19	16	16,16S	16	6	.250	.437	1	3.00	1.112
114	7	12	12,12S	12	4	.125	.312	1	2.00	.858
115	7	12	12,12S	12	4	.125	.312	1	3.00	.858
116	12	14	14,14S	14	6	.250	.437	1	2.00	.984
117	12	14	14,14S	14	6	.250	.437	1	3.00	.984
118	19	16	16,16S	16	10	.350	.625	1	2.00	1.112
119	19	16	16,16S	16	10	.350	.625	1	3.00	1.112

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO.	E REF	V THREAD CLASS 2A	F DIA MAX	G MAX
101	2.92	2.500-16 UN	--	6.86
102	3.92	2.500-16 UN	--	7.86
103	1.92	1.1875-18 UNEF	--	5.33
104	2.92	1.1875-18 UNEF	--	6.33
105	1.92	1.4375-18 UNEF	--	5.42
106	2.92	1.4375-18 UNEF	--	6.42
107	2.67	1.750-18 UNS	1.969	6.32
108	3.67	1.750-18 UNS	1.969	7.50
109	2.67	2.000-18 UNS	1.969	6.35
110	3.67	2.000-18 UNS	1.969	7.35
111	1.00	1.000-20 UNEF	--	4.26
112	1.00	1.000-20 UNEF	--	4.26
113	2.00	.750-20 UNEF	--	5.26
114	1.00	.750-20 UNEF	--	4.28
115	2.00	.625-24 UNEF	--	5.28
116	1.00	.625-24 UNEF	--	4.26
117	2.00	.750-20 UNEF	--	5.26
118	0.92	.750-20 UNEF	--	4.38
119	1.92	1.000-20 UNEF	--	5.38

SAENORM.COM : Click to view the full PDF of as85049/10a

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO .	FITS SHELL OF CONNECTOR				CLAMP SIZE	A (SEE NOTE 6)		STYLE	B ±.125	D DIA MAX
	AS81703 SER 3	MIL-DTL- 26482 SER 2	MIL-DTL- 5015 CRIMP	MIL-DTL- 83723 SER III		WIRE BUNDLE ACCOMMODATION RANGE				
						MIN	MAX			
120	27	18	18	18	4	.125	.312	1	2.00	1.218
121	27	18	18	18	4	.125	.312	1	3.00	1.218
122	27	18	18	18	6	.250	.437	1	2.00	1.218
123	27	18	18	18	6	.250	.437	1	3.00	1.218
124	37	20	20	20	6	.250	.437	1	3.00	1.345
125	37	20	20	20	6	.250	.437	1	4.00	1.345
126	--	22	22	22	4	.125	.312	1	3.00	1.468
127	--	22	22	22	4	.125	.312	1	4.00	1.468
128	--	22	22	22	6	.250	.437	1	3.00	1.468
129	--	22	22	22	6	.250	.437	1	4.00	1.468
130	--	24	24	24	10	.350	.625	1	3.00	1.593
131	--	24	24	24	10	.350	.625	1	4.00	1.593
132	--	--	36	--	12	.500	.750	1	4.00	2.469
133	--	--	36	--	12	.500	.750	1	5.00	2.469
134	--	--	40	--	12	.500	.750	1	4.00	2.719
135	--	--	40	--	12	.500	.750	1	5.00	2.719
136	--	10	10S,10S	10	6	.250	.375	1	2.00	.734
137	--	10	10S,10S	10	6	.250	.375	1	3.00	.734
138	7	12	12,12S	12	10	.350	.500	1	2.00	.858
139	7	12	12,12S	12	10	.350	.500	1	3.00	.858

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO.	E REF	V THREAD CLASS 2A	F DIA MAX	G MAX
120	0.92	.625-24 UNEF	--	4.28
121	1.92	.625-24 UNEF	--	5.28
122	0.92	.750-20 UNEF	--	4.26
123	1.92	.750-20 UNEF	--	5.26
124	1.92	.750-20 UNEF	--	5.26
125	2.92	.750-20 UNEF	--	6.26
126	1.92	.625-24 UNEF	--	5.28
127	2.97	.625-24 UNEF	--	6.28
128	1.92	.750-20 UNEF	--	5.26
129	2.92	.750-20 UNEF	--	6.26
130	1.92	1.000-20 UNEF	--	5.26
131	2.92	1.000-20 UNEF	--	6.26
132	2.92	1.1875-18 UNEF	--	6.34
133	3.92	1.1875-18 UNEF	--	7.34
134	2.92	1.1875-18 UNEF	--	6.34
135	3.92	1.1875-18 UNEF	--	7.34
136	1.06	.750-20 UNEF	--	4.26
137	2.06	.750-20 UNEF	--	5.26
138	1.06	1.000-20 UNEF	--	4.26
139	2.06	1.000-20 UNEF	--	5.26

SAENORM.COM : Click to view the full PDF of as85049/10a

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO .	FITS SHELL OF CONNECTOR				CLAMP SIZE	A (SEE NOTE 6)		STYLE	B ±.125	D DIA MAX
	AS81703 SER 3	MIL-DTL- 26482 SER 2	MIL-DTL- 5015 CRIMP	MIL-DTL- 83723 SER III		WIRE BUNDLE ACCOMMODATION RANGE				
						MIN	MAX			
140	37	20	20	20	16	.625	.904	1	3.00	1.345
141	37	20	20	20	16	.625	.904	1	4.00	1.345
142	--	22	22	22	20	.875	1.029	1	3.00	1.468
143	--	22	22	22	20	.875	1.029	1	4.00	1.468
144	--	24	24	24	20	.875	1.144	1	3.00	1.593
145	--	24	24	24	20	.875	1.144	1	4.00	1.593
146	--	--	36	--	32	1.437	1.840	1	4.00	2.469
147	--	--	36	--	32	1.437	1.840	1	5.00	2.469
148	--	--	36	--	16	.625	.937	1	4.00	2.469
149	--	--	36	--	16	.625	.937	1	5.00	2.469
150	12	14	14,14S	14	4	.125	.312	1	2.00	.984
151	12	14	14,14S	14	4	.125	.312	1	3.00	.984
152	19	16	16,16S	16	4	.125	.312	1	2.00	1.112
153	19	16	16,16S	16	4	.125	.312	1	3.00	1.112
154	--	--	44	--	16	.625	.937	1	4.00	2.969
155	--	--	44	--	16	.625	.937	1	5.00	2.969
156	--	--	40	--	16	.625	.937	1	4.00	2.719
157	--	--	40	--	16	.625	.937	1	5.00	2.719

TABLE 1 - DIMENSIONS (CONTINUED)

DASH NO.	E REF	V THREAD CLASS 2A	F DIA MAX	G MAX
140	1.92	1.4375-18 UNEF	--	5.42
141	2.92	1.4375-18 UNEF	--	6.42
142	1.92	1.750-18 UNS	--	5.57
143	2.92	1.750-18 UNS	--	6.57
144	1.92	1.750-18 UNS	--	5.57
145	2.92	1.750-18 UNS	--	6.57
146	2.92	2.500-16 UN	--	7.12
147	3.92	2.500-16 UN	--	8.12
148	2.92	1.4375-18 UNEF	--	6.42
149	3.92	1.4375-18 UNEF	--	7.42
150	0.92	.625-24 UNEF	--	4.28
151	1.92	.625-24 UNEF	--	5.28
152	0.92	.625-24 UNEF	--	4.28
153	1.92	.625-24 UNEF	--	5.28
154	2.92	1.4375-18 UNEF	--	6.42
155	3.92	1.4375-18 UNEF	--	7.42
156	2.92	1.4375-18 UNEF	--	6.42
157	3.92	1.4375-18 UNEF	--	7.42