

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV.
A


AS85049/86

FEDERAL SUPPLY CLASS
5935

RATIONALE

REVISED TO INCLUDE COMMENTS RECEIVED BY THE GOVERNMENT AND INDUSTRY USERS. UPDATED ALL REFERENCE SPECIFICATIONS. REMOVED GOVERNMENT JARGON AS A RESULT OF THE WORD-FOR-WORD CONVERSION.


THE REQUIREMENTS FOR PROCURING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE LATEST ISSUE OF: SAE AS85049.

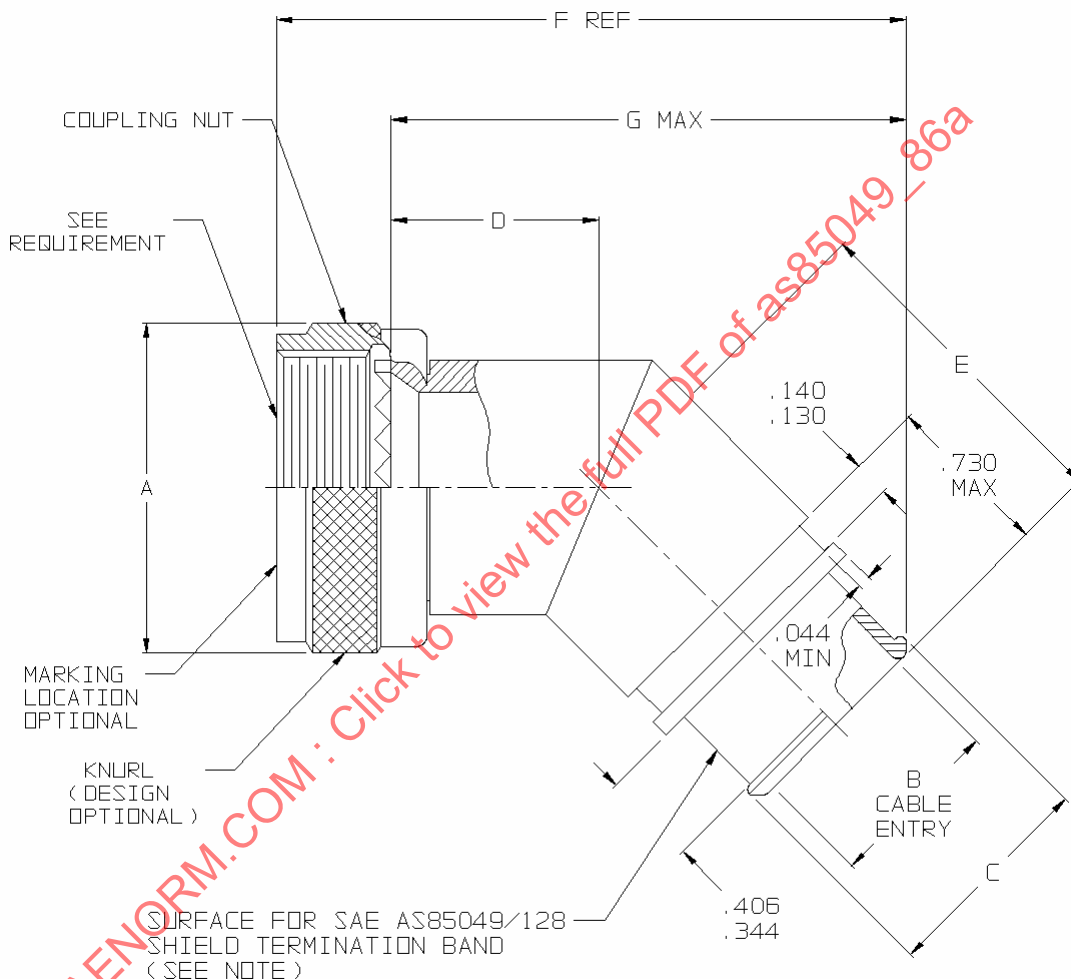

NOTE: RIBBED, INTERNAL KNURL OR SURFACE ROUGHNESS Ra 125-250 IN ACCORDANCE WITH ANSI B46.1. SEE FIGURE 2 FOR SELECTIVE PLATING DETAILS.

FIGURE 1 - CONFIGURATION AND DIMENSIONS

THIRD ANGLE PROJECTION



CUSTODIAN: SAE AE-8/AE-8C1

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

(R) CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, 45°, SELF-LOCKING, SHIELD BAND TERMINATION, (RFI/EMI), SHRINK SLEEVE ACCOMMODATION, CATEGORY 3B (FOR MIL-DTL-38999 SERIES I AND II CONNECTORS)

AS85049/86
SHEET 1 OF 4

**REV.
A**

Copyright 2007 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)

Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 2000-06
REVISED 2007-06

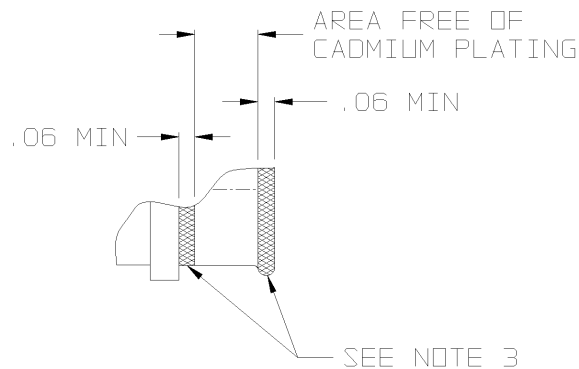


FIGURE 2 - SELECTIVE PLATING

INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm
.044	1.12	.552	14.27	.829	21.06	.960	24.38	1.135	28.83	1.310	33.27
.060	1.52	.583	14.81	.870	22.10	.980	24.89	1.145	29.08	1.340	34.04
.130	3.30	.625	15.88	.875	22.23	1.000	25.40	1.160	29.46	1.380	35.05
.140	3.56	.645	16.38	.885	22.48	1.010	25.65	1.180	29.97	1.385	35.18
.250	6.35	.688	17.48	.890	22.61	1.020	25.91	1.200	30.48	1.510	38.35
.312	7.92	.707	17.96	.895	22.73	1.030	26.16	1.220	30.99	1.542	39.17
.395	10.03	.730	18.54	.920	23.37	1.050	26.67	1.250	31.75	1.635	41.53
.438	11.13	.750	19.05	.938	23.83	1.083	27.51	1.260	32.00	1.760	44.70
.457	11.61	.770	19.56	.940	23.88	1.100	27.94	1.270	32.26	1.885	47.88
.500	12.70	.812	20.62	.957	24.31	1.125	28.58	1.290	32.77	2.135	54.23

NOTES:

NOTICE

THIS DOCUMENT REFERENCES A PART WHICH CONTAINS CADMIUM AS A PLATING MATERIAL. CONSULT LOCAL OFFICIALS IF YOU HAVE QUESTIONS CONCERNING CADMIUM'S USE.

1. DIMENSIONS ARE IN INCHES.
2. METRIC EQUIVALENTS ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1.00 (25.4 mm).
3. CADMIUM/NICKEL INTERFACE SHALL BE COATED WITH POLYSULFIDE SEALANT.
4. PART SUPPLIED WITH STANDARD DETENTED SELF-LOCKING, WHICH PROVIDES A POSITIVE AUDIBLE DETENTED COUPLING.
5. THE CHANGE BAR (I) LOCATED IN THE LEFT MARGIN IS FOR THE CONVENIENCE OF THE USER IN LOCATING AREAS WHERE TECHNICAL REVISIONS, NOT EDITORIAL CHANGES, HAVE BEEN MADE TO THE PREVIOUS ISSUE OF THIS DOCUMENT. AN (R) SYMBOL TO THE LEFT OF THE DOCUMENT TITLE INDICATES A COMPLETE REVISION OF THE DOCUMENT.

OPTION 'N' IS A FREE SPINNING SELF-LOCKING COUPLING.

TABLE 1 - SHELL SIZE AND DIMENSIONS

ACCESSORY SHELL SIZE	CONNECTOR SHELL SIZE (REF)		A MAX	B ±0.10 DIA ENTRY SIZE		C DIA (REF)		D MAX DIM	E MAX DIM	F (REF) DIM		G MAX DIM	
	SERIES I	SERIES II		02	03	02	03			02	03	02	03
08	9	8	0.859	N/A	0.250	N/A	0.395	0.87	1.16	1.878	2.018	1.690	1.830
10	11	10	0.984	N/A	0.312	N/A	0.457	0.90	1.19	1.929	2.091	1.741	1.903
12	13	12	1.156	0.312	0.438	0.457	0.583	0.92	1.21	2.125	2.170	1.937	1.982
14	15	14	1.281	0.438	0.562	0.583	0.707	0.95	1.24	2.221	2.265	2.033	2.077
16	17	16	1.406	0.500	0.625	0.645	0.770	0.98	1.26	2.287	2.331	2.099	2.143
18	19	18	1.516	0.625	0.750	0.770	0.895	0.98	1.27	2.338	2.382	2.150	2.194
20	21	20	1.641	0.625	0.812	0.770	0.957	1.01	1.30	2.389	2.456	2.201	2.268
22	23	22	1.766	0.688	0.938	0.829	1.083	1.04	1.33	2.462	2.551	2.274	2.363
24	25	24	1.891	0.750	1.000	0.895	1.145	1.07	1.35	2.529	2.617	2.341	2.429