

**S. A. E.  
LIBRARY**

**Component Nomenclature -  
Articulated Log Skidder,  
Rubber - Tired — SAE J1109**

**SAE STANDARD**

**APPROVED MAY 1975**

SAENORM.COM :: Click to view the full PDF of J1109\_197505




Report of Construction and Industrial Machinery  
Technical Committee approved May 1975.


1. SCOPE - This standard includes names of major components and parts particular to this type of machine.

Illustrations used here are not intended to include all existing commercial vehicles, or to be exactly descriptive of any particular machine. They have been chosen to describe the principles to be used in applying this standard.

1. Operator Protective Structure
2. Front Frame
3. Rear Frame
4. Blade
- \*5. Blade arm
6. Winch
7. Arch
8. Fairlead
  - 8(a) Main Fairlead Roller
  - 8(b) Auxiliary Fairlead Rollers
9. Tire
10. Rim
11. Axle
12. Driveline
13. Radiator
14. Engine
15. Power Transmission System to Wheels and/or Winch
16. Seat
17. Steering Cylinder
18. Blade Cylinder
19. Decking Lug
20. Log Bumper

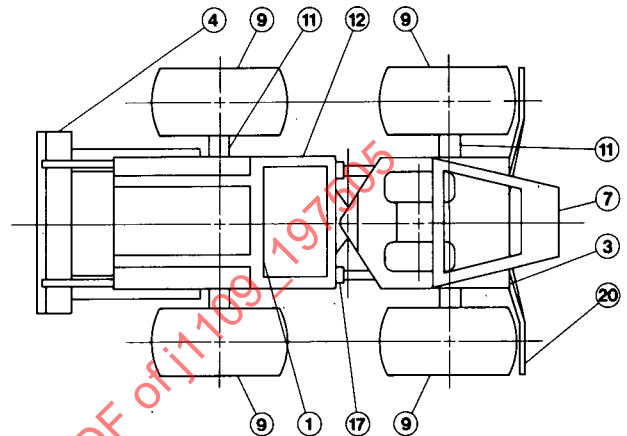

Ref. 75-5T  
Fig. 1

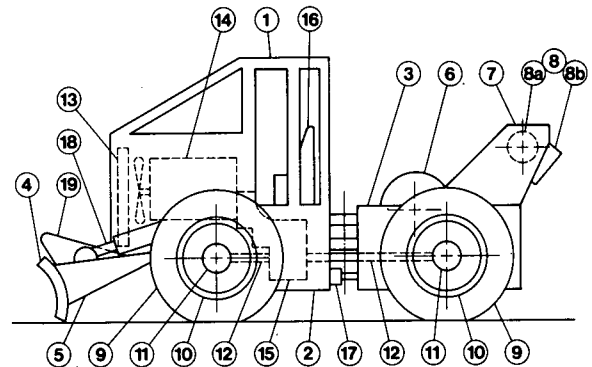

Ref. 75-5T  
Fig. 2

\*See: Nomenclature - Dozer - SAE J729a  
This part, depending upon its  
shape, could be called:

- a) Push Beam
- b) C-Frame
- c) Angling Strut
- d) Push Frame