



400 Commonwealth Drive, Warrendale, PA 15096-0001

SURFACE VEHICLE RECOMMENDED PRACTICE

Submitted for recognition as an American National Standard

SAE J2276

Issued 1995-09

NUMBERING SYSTEM FOR MULTIPLE DIAMETER CUTTING TOOLS

1. Scope—This SAE Recommended Practice provides a systematic method for the identification of multiple diameter cutting tools. It is intended to assist in the cataloging and supplying of these tools.

NOTE—Caution must be taken when assigning codes for designators to prevent specifying cutting tools that cannot be physically or economically manufactured.

2. References

2.1 Applicable Documents—The following publications (latest revision) form a part of this specification to the extent specified herein.

NOTE—Reference information not specified to be manufacturer's standard practices. Manufacturers to supply information for regrind upon request.

2.1.1 ANSI PUBLICATIONS—Available from American National Standards Institute, 11 West 42nd Street, New York, NY 10036-8002.

ANSI B5.10—Machine Tapers

ANSI B94.11—Twist Drills

ANSI B94.11M-1979—Nomenclature, Definitions, Sizes, and Tolerances of Twist Drills

2.1.2 ISO PUBLICATIONS—Available from International Organization for Standardization, 1 Rue DeVarembe, Case Postal 56, CH1211 Geneva 20 Switzerland. (The publications are also available through American National Standards Institute.)

ISO 235—Parallel Shank Jobbers, Stub Series Drills and Morse Taper Shank Drills

ISO 286/2—System of Limits and Fits

ISO 296—Machine Tools—Self Holding Tapers for Tool Shanks

ISO 494—Parallel Shank Twist Drills—Long Series

ISO 866—Center Drills for Center Holes Without Protecting Chamfers—Type A

ISO 2306—Drills for Use Prior to Tapping Screw Threads

ISO 2540—Centre Drills for Centre Holes With Protecting Chamfer—Type B

ISO 2541—Centre Drills for Centre Holes With Radius Form—Type R

ISO 3291—Extra Long Morse Taper Shank Twist Drills

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

SAE J2276 Issued SEP95

2.1.3 DIN PUBLICATIONS—Available from Beuth Verlag GmbH, Burggrafenstrasse 6, D-1000 Berlin 30 Germany. (The publications are also available through American National Standards Institute.)

DIN 228 Part 1—Morse Taper Shanks
 DIN 332—60 Degree Center Holes
 DIN 333—60 Degree Center Drills
 DIN 333R—Center Drills With Radius Step Angles
 DIN 338—Parallel Shank Twist Drills—Jobbers Series
 DIN 339—Parallel Shank Twist Drills for Use in Jig Bushings
 DIN 340—Parallel Shank Twist Drills—Long Series
 DIN 341—Morse Taper Shank Twist Drills—Long Series
 DIN 345—Morse Taper Shank Twist Drills—for Use in Jig Bushings
 DIN 346—Morse Taper Shank Twist Drill With Oversize Shank
 DIN 1412—Twist Drill Definitions
 DIN 1414—Twist Drills of High Speed Steel—Technical Conditions of Delivery
 DIN 1809—Driving Tenons for Tools With Parallel Shanks
 DIN 1861—Twist Drills for Jig Boring Machines
 DIN 1869—Extra Length Drills Series 1, 2 and 3
 DIN 1870—Extra Length Taper Shank Drills Series 1 & 2
 DIN 1897—Stub Length Drills
 DIN 1899—Cobalt Micro Precision Drills HSCO Form A
 DIN 6539—Continuous Parallel Shank Solid Hardmetal Twist Drills
 DIN 7168 Part 1—General Tolerances; Linear and Angular Dimensions
 DIN 8037—Twist Drills With Parallel Shank With Carbide Tips for Drilling Metal
 DIN 8038—Twist Drills With Parallel Shank With Carbide Tips for Drilling Plastics
 DIN 8039—Parallel Shank Masonry Drills With Carbide Tips
 DIN 8041—Twist Drills With Morse Taper Shanks With Carbide Tips for Drilling Steel
 DIN 17350—Tools Steels—Technical Conditions of Delivery

2.1.4 USCTI PUBLICATIONS—Available from United States Cutting Tool Institute, 1300 Summer Avenue, Cleveland, OH 44115.

Standard Drills—Handbook of Specifications
 USCTI—Handbook of Standard Drills

2.1.5 DATOM ENGINEERING SOFTWARE, INC.—Available from Datom Engineering Software, Inc., 561 Somerset, Suite 3, Crystal Lake, IL 60014, (815) 477-3380.

Datom Engrg. Software Inc. TMS III-Drills-Electronic Reference Manual—Nomenclature, Definitions, Sizes, and Tolerances of Twist Drills

3. Numbering System

3.1 Format—The basic numbering system utilizes 30 or 40 positions to fully describe the various dimensions, types, materials, and characteristics of two diameter (one step) cutting tools.

3.1.1 FORMAT—30 Position—Two diameter (one step) cutting tools which comply with the referenced Standards.

3.1.2 FORMAT—40 Position—Two diameter (one step) cutting tools with flute lengths and/or overall lengths which do not comply with the referenced Standards.

SAE J2276 Issued SEP95

3.2 Content of Numbering System—The numbering system utilizes 30 or 40 positions to fully describe the various dimensions, types, materials, and characteristics of two diameter (one step) cutting tools.

Figure 1 illustrates the content and sequence of the 30 positions in the numbering system for two diameter (one step) cutting tools whose flute lengths and overall lengths comply with the referenced Standards.

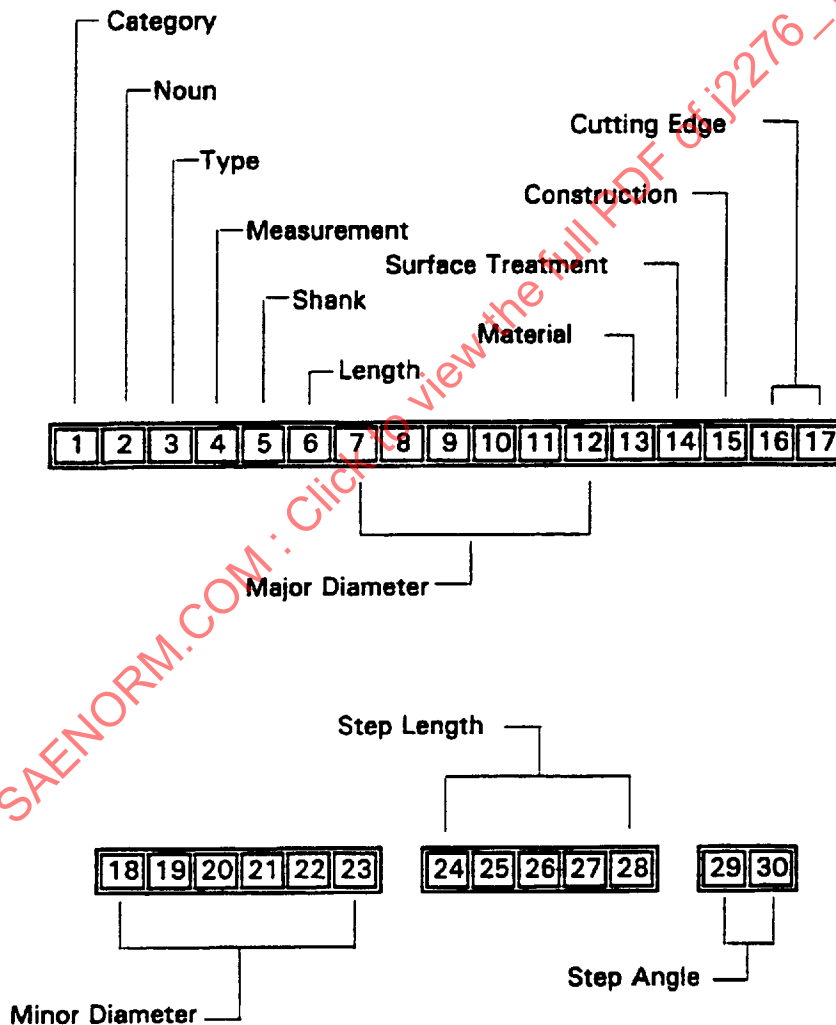


FIGURE 1—FORMAT—30 POSITION

SAE J2276 Issued SEP95

Figure 2 illustrates the content and sequence of the 40 positions in the numbering system for two diameter (one step) cutting tools whose flute lengths and/or overall lengths do not comply with the referenced Standards.

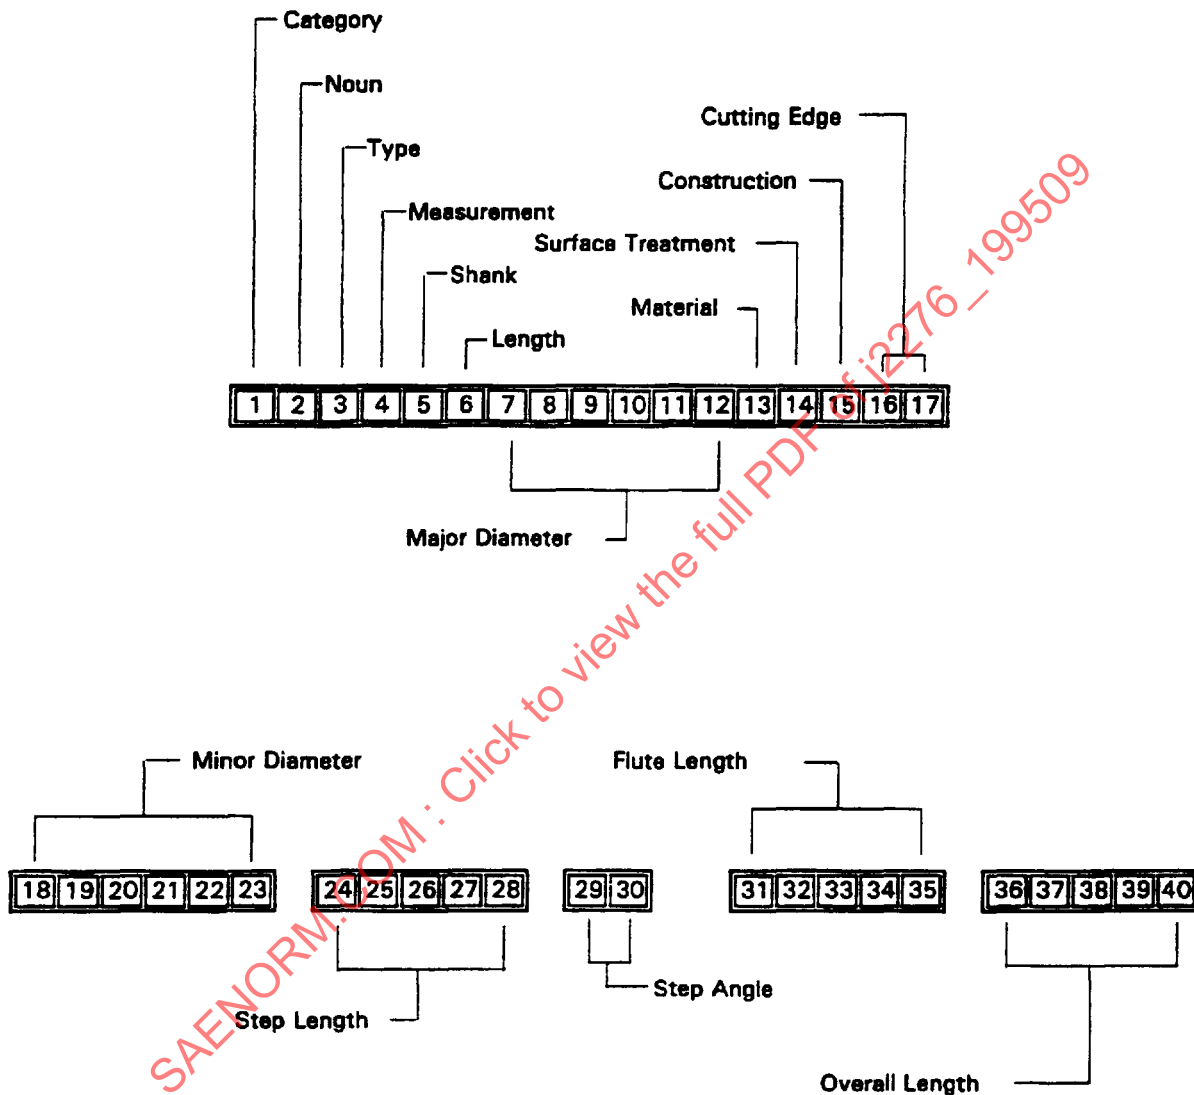


FIGURE 2—FORMAT—40 POSITION

3.3 Positions—The content of each position is explained in detail in the following sections:

3.3.1 POSITIONS 1 AND 2, CATEGORY AND NOUN—Positions 1 and 2 will always be alphabetic. The following designations have been assigned:

Position 1: T—designates TOOL

Position 2: M—designates MULTIPLE DIAMETER (See Figure 3.)

SAE J2276 Issued SEP95

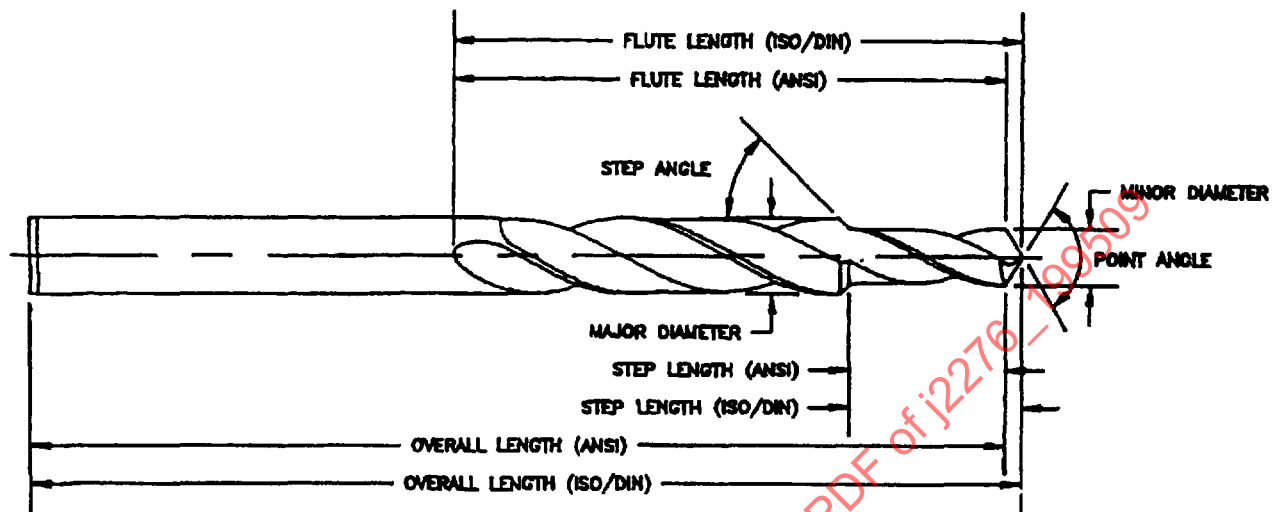


FIGURE 3—MULTI-DIAMETER CUTTING TOOL

3.3.2 POSITION 3, TYPE—Position 3 will always be numeric based on the type of tool. The following codes have been assigned for two diameter cutting tools:

- A—2 Flute Step Drill
- B—3 Flute Step Drill
- C—Subland Drill 2 x 2
- D—Subland Drill 3 x 3
- E—3 Flute Step Core Drill
- F—4 Flute Step Core Drill
- G—Subland Core Drill 3 x 3
- H—Subland Core Drill 4 x 4
- J—4 Flute Step Reamer
- K—6 Flute Step Reamer
- L—8 Flute Step Reamer
- M—Subland Reamer 4 x 4
- N—Subland Reamer 6 x 6
- P—Subland Reamer 8 x 8
- Q—Combination Drill Reamer 2 x 4
- R—Combination Drill Reamer 2 x 6
- S—Combination Drill Reamer 2 x 8
- T—Subland Drill Reamer 2 x 4
- U—Subland Drill Reamer 2 x 6
- V—Subland Drill Reamer 2 x 8

SAE J2276 Issued SEP95

3.3.3 POSITION 4, MEASUREMENT—Position 4 will always be alphabetic. The following codes have been assigned:

C—Inch—ANSI Standards
 M—Metric—ANSI Standards
 U—Metric—DIN Standards
 W—Metric—ISO Standards

3.3.4 POSITION 5, SHANK—Position 5 can be alpha or numeric.

0—No. 0 Morse Taper
 1—No. 1 Morse Taper
 2—No. 2 Morse Taper
 3—No. 3 Morse Taper
 4—No. 4 Morse Taper
 5—No. 5 Morse Taper
 6—No. 6 Morse Taper
 S—Straight Shank (same as major diameter)
 T—Straight Shank (same as major diameter)—Tanged

3.3.5 POSITION 6, LENGTH—Position 6 can be alpha or numeric. The following codes have been assigned:

NOTE—When Position 6 is an "X," then the 40 position format must be used.

1—Taper Length (ANSI)/Long Series (DIN/ISO)
 2—Jobbers Length (ANSI)/Jobber Series (DIN/ISO)
 4—For use in Jig Bushes (DIN)
 7—Regular Length—Solid Carbide
 8—Stub Length—Solid Carbide
 9—Screw Machine Length (ANSI)/Stub Series (ISO)
 X—Special Length

3.3.6 POSITIONS 7, 8, 9, 10, 11, AND 12, MAJOR TOOL DIAMETER (METRIC OR INCH)—These positions will always be numeric with a decimal point as an integral part of the number.

NOTE—Use zeros for all open positions.

3.3.6.1 *Major Diameter (Metric)*—Position 4 indicates "M," "U," or "W."

Major Diameter will be specified to the thousandth of a millimeter, with the decimal point located in Position 9.

Maximum diameter will be (99.999 mm).

Examples:

00.900 mm
 03.250 mm
 09.750 mm
 15.000 mm
 37.500 mm

SAE J2276 Issued SEP95

3.3.6.2 Major Diameter-Drill (Inch)—Position 4 indicates "C."

Major Diameter will be specified to the ten thousandth of an inch, with the decimal point located in Position 8.

Maximum diameter will be (9.9999 in).

Examples:

0.1250 in (1/8 in)
 0.2500 in (1/4 in)
 0.8750 in (7/8 in)
 1.0000 in (1 in)
 1.2500 in (1-1/4 in)

3.3.7 POSITION 13, MATERIAL DESIGNATOR—Position 13 will always be alphabetic. The following codes have been assigned:

3.3.7.1 Manufacturer's Standard

H—High Speed Steel
 C—Cobalt High Speed Steel
 S—Solid Carbide
 T—Carbide Tipped
 A—Solid Carbide Head—Steel Body—Steel Shank
 B—Solid Carbide Head—Steel Shank
 Z—Solid Carbide—Micrograin
 P—Poly Crystalline Diamond Tipped

3.3.7.2 Other

2—High Speed Steel—M3 Type 2
 D—Cobalt High Speed Steel—M35
 E—Cobalt High Speed Steel—M42
 F—Cobalt High Speed Steel—M33
 I—High Speed Steel—M1
 J—High Speed Steel—M2
 K—High Speed Steel—M7
 L—High Speed Steel—M10
 M—Cobalt High Speed Steel—T15
 N—Solid Carbide—C3
 Q—Solid Carbide—C2
 R—Solid Carbide—C5
 U—Carbide Tipped—C1
 V—Carbide Tipped—C2
 W—Carbide Tipped—C5
 O—Carbide Tipped—C3
 X—Carbide Tipped—C6
 Y—Carbide Tipped—C7

SAE J2276 Issued SEP95

3.3.8 POSITION 14, SURFACE TREATMENT—Position 14 can be alpha or numeric. The following codes have been assigned:

- 0—Standard Treated
- 1—Untreated (Bright)
- 2—Steam Oxide
- 3—Nitride Plus Steam Oxide
- 4—Nitride Only
- 6—Bronze Oxide (Straw Draw)
- A—Titanium Nitride (TiN)
- B—Titanium Carbo Nitride (TiCN)
- C—Titanium Aluminum Nitride (TiAlN)
- D—Chrome Nitride (CrN)
- E—Chrome Carbide (CrC)
- F—Boron Carbide (BC)
- G—Zirconium Nitride (ZrN)

3.3.9 POSITION 15, FLUTE CONSTRUCTION (TYPE HELIX AND HAND OF CUT)—Position 15 can be alpha or numeric. The following codes have been assigned:

- 1—Straight, Right Hand Cut
- 2—Straight, Left Hand Cut
- 3—Right Hand Spiral, Right Hand Cut
- 4—Right Hand Spiral, Left Hand Cut
- 5—Left Hand Spiral, Right Hand Cut
- 6—Left Hand Spiral, Left Hand Cut
- 7—Right Hand High Helix, Right Hand Cut
- 8—Right Hand High Helix, Left Hand Cut
- A—Left Hand High Helix, Right Hand Cut
- B—Left Hand High Helix, Left Hand Cut
- C—Right Hand Slow Spiral, Right Hand Cut
- D—Right Hand Slow Spiral, Left Hand Cut
- E—Left Hand Slow Spiral, Right Hand Cut
- F—Left Hand Slow Spiral, Left Hand Cut

3.3.10 POSITIONS 16 AND 17, CUTTING EDGE—MINOR DIAMETER—Positions 16 and 17 will be alpha and/or numeric.

3.3.10.1 Point—When Position 3 indicates:

- A—2 Flute Step Drill
- B—3 Flute Step Drill
- C—Subland Drill 2 x 2
- D—Subland Drill 3 x 3
- Q—Combination Drill Reamer 2 x 4
- R—Combination Drill Reamer 2 x 6
- S—Combination Drill Reamer 2 x 8
- T—Subland Drill Reamer 2 x 4
- U—Subland Drill Reamer 2 x 6
- V—Subland Drill Reamer 2 x 8

SAE J2276 Issued SEP95

The following codes have been assigned:

00—118 degree Split Point NAS P-5
 01—135 degree Split Point NAS P-3
 02—135 degree Split Point NAS P-9
 15— 60 degree Point
 20— 90 degree Point
 23— 90 degree Notched Point (M.S.)
 25— 90 degree Split Point
 26— 90 degree x 60 degree Double Angle Point
 28—100 degree Point
 33—118 degree Point
 35—118 degree Four Facet Point
 36—118 degree Four Facet Split Point
 37—118 degree Notched Point (M.S.)
 39—118 degree Helical Point
 40—118 degree Split Point
 41—118 degree x 60 degree Double Angle Point
 42—118 degree x 90 degree Double Angle Point
 43—118 degree x 90 degree Double Angle Split Point
 45—118 degree Flat Lip Web Thinning Point
 47—120 degree Point
 49—130 degree Point
 50—130 degree Notched Point (M.S.)
 51—130 degree Split Point
 52—130 degree Bickford Point
 53—130 degree Helical Point
 56—135 degree Point
 57—135 degree Chipbreaker Point (M.S.)
 58—135 degree Notched Point
 60—135 degree Split Point
 62—140 degree Point
 64—150 degree Point
 69—180 degree Point (Flat Bottom)
 85—Racon Point (M.S.)
 86—Fishtail Point

3.3.10.2 *Chamfer*—When Position 3 indicates:

E—3 Flute Step Core Drill
 F—4 Flute Step Core Drill
 G—Subland Core Drill 3 x 3
 H—Subland Core Drill 4 x 4
 J—4 Flute Step Reamer
 K—6 Flute Step Reamer
 L—8 Flute Step Reamer
 M—Subland Reamer 4 x 4
 N—Subland Reamer 6 x 6
 P—Subland Reamer 8 x 8

SAE J2276 Issued SEP95

The following codes have been assigned:

A1— 90 degrees Included Angle Chamfer
 B1—118 degrees Included Angle Chamfer
 C1—180 degrees End Cut to Bottom of Flutes
 D1—180 degrees Center Cutting
 E1— 90 degrees Chamfer Followed by Entering Lead
 F1—118 degrees Chamfer Followed by Entering Lead
 R1—Radial Radius Form Relieved (Barber-Coleman)
 T1—Taper

3.3.11 POSITIONS 18, 19, 20, 21, 22, AND 23, MINOR TOOL DIAMETER (METRIC OR INCH)—These positions will always be numeric with a decimal point as an integral part of the number.

NOTE—Use zeros for all open positions.

3.3.11.1 *Minor Diameter (Metric)*—Position 4 indicates "M," "U," or "W."

Minor Diameter will be specified to the thousandth of a millimeter, with the decimal point located in Position 20.

Maximum diameter will be (99.999 mm).

Examples:

00.900 mm
 03.250 mm
 09.750 mm
 15.000 mm
 17.500 mm
 25.500 mm

3.3.11.2 *Minor Diameter (Inch)*—Position 4 indicates "C."

Minor Diameter will be specified to the ten thousandths of an inch, with the decimal point located in Position 19.

Maximum diameter will be (9.9999 in).

Examples:

0.1250 in (1/8 in)
 0.1875 in (3/16 in)
 0.2500 in (1/4 in)
 0.8750 in (7/8 in)
 1.0000 in (1 in)
 1.2500 in (1-1/4 in)

3.3.12 POSITIONS 24, 25, 26, 27, AND 28, STEP LENGTH (METRIC OR INCH)—These positions will always be numeric, with a decimal point as an integral part of the number.

NOTE—Use zeros for all open positions.

SAE J2276 Issued SEP95**3.3.12.1 Step Length (Metric)**—Position 4 indicates "M," "U," or "W."

The step length will be specified to the nearest tenth of a millimeter, with the decimal point located in Position 27.

Maximum step length will be (999.9 mm).

Examples:

006.3 mm
012.7 mm
025.4 mm
100.0 mm
120.6 mm
158.7 mm

3.3.12.2 Step Length (Inch)—Position 4 indicates "C."

The step length will be specified to the nearest hundredth of an inch, with the decimal point located in Position 26.

Maximum step length will be (99.99 in).

Examples:

00.25 in
00.87 in
01.00 in
01.62 in
04.25 in
06.24 in

3.3.13 POSITIONS 29 AND 30, STEP ANGLE (METRIC OR INCH)—These positions will always be numeric and designate the step angle (1/2 the included angle). The designated step angle will be specified from 00 to 90.

Examples:

30—30 degree Step Angle (60 degree Included Angle)
45—45 degree Step Angle (90 degree Included Angle)
59—59 degree Step Angle (118 degree Included Angle)
60—60 degree Step Angle (120 degree Included Angle)
90—90 degree Step Angle (180 degree Included Angle)

3.3.14 POSITIONS 31, 32, 33, 34, AND 35, FLUTE LENGTH (METRIC OR INCH)—These positions will always be numeric with a decimal point as an integral part of the number.

NOTE—Use zeros for all open positions.

SAE J2276 Issued SEP95**3.3.14.1 Flute Length (Metric)**—Position 4 indicates “M,” “U,” or “W.”

The flute length will be specified to the nearest tenth of a millimeter, with the decimal point located in Position 34.

Maximum flute length will be (999.9 mm).

Examples:

120.6 mm
158.7 mm
212.6 mm
260.3 mm
282.4 mm

3.3.14.2 Flute Length (Inch)—Position 4 indicates “C.”

The flute length will be specified to the nearest hundredth of an inch, with the decimal point located in Position 33.

Maximum flute length will be (99.99 in).

Examples:

04.75 in
06.25 in
08.37 in
10.25 in
11.12 in

3.3.15 POSITIONS 36, 37, 38, 39, AND 40, OVERALL LENGTH (METRIC OR INCH)—These positions will always be numeric, with a decimal point as an integral part of the number.

NOTE—Use zeros for all open positions.

3.3.15.1 Overall Length (Metric)—Position 4 indicates “M,” “U,” or “W.”

The overall length will be specified to the nearest tenth of a millimeter, with the decimal point located in Position 39.

Maximum overall length will be (999.9 mm).

Examples:

174.5 mm
244.3 mm
292.1 mm
349.2 mm
390.4 mm
460.2 mm