



UL 746S

STANDARD FOR SAFETY

Evaluation of Sustainable Polymeric
Materials for Use in Electrical
Equipment

ULNORM.COM : Click to view the full PDF of UL 746S 2025

[ULNORM.COM](https://ulnorm.com) : Click to view the full PDF of UL 746S 2025

UL Standard for Safety for Evaluation of Sustainable Polymeric Materials for Use in Electrical Equipment, UL 746S

First Edition, Dated August 30, 2023

Summary of Topics

This revision of ANSI/UL 746S dated February 5, 2025, includes the following changes in requirements:

– Addition of New Definitions to Glossary, Section 4 ([4.1A](#), [4.4A](#) – [4.8](#)); Revision of [6.1.1](#); Revision of [Figure 6.1](#); Addition of [Figure 6.2](#)

Text that has been changed in any manner or impacted by ULSE's electronic publishing system is marked with a vertical line in the margin.

The new and revised requirements are substantially in accordance with Proposal(s) on this subject dated November 22, 2024.

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form by any means, electronic, mechanical, photocopying, recording, or otherwise without prior permission of ULSE Inc. (ULSE).

ULSE provides this Standard "as is" without warranty of any kind, either expressed or implied, including but not limited to, the implied warranties of merchantability or fitness for any purpose.

In no event will ULSE be liable for any special, incidental, consequential, indirect or similar damages, including loss of profits, lost savings, loss of data, or any other damages arising out of the use of or the inability to use this Standard, even if ULSE or an authorized ULSE representative has been advised of the possibility of such damage. In no event shall ULSE's liability for any damage ever exceed the price paid for this Standard, regardless of the form of the claim.

Users of the electronic versions of UL's Standards for Safety agree to defend, indemnify, and hold ULSE harmless from and against any loss, expense, liability, damage, claim, or judgment (including reasonable attorney's fees) resulting from any error or deviation introduced while purchaser is storing an electronic Standard on the purchaser's computer system.

No Text on This Page

ULNORM.COM : Click to view the full PDF of UL 746S 2025

AUGUST 30, 2023

(Title Page Reprinted: February 5, 2025)

1

UL 746S

**Standard for Evaluation of Sustainable Polymeric Materials for Use in
Electrical Equipment**

First Edition

August 30, 2023

This ANSI/UL Standard for Safety consists of the First Edition including revisions through February 5, 2025.

The most recent designation of ANSI/UL 746S as an American National Standard (ANSI) occurred on February 5, 2025. ANSI approval for a standard does not include the Cover Page, Transmittal Pages, and Title Page.

Comments or proposals for revisions on any part of the Standard may be submitted to ULSE at any time. Proposals should be submitted via a Proposal Request in the Collaborative Standards Development System (CSDS) at <https://csds.ul.com>.

Our Standards for Safety are copyrighted by ULSE Inc. Neither a printed nor electronic copy of a Standard should be altered in any way. All of our Standards and all copyrights, ownerships, and rights regarding those Standards shall remain the sole and exclusive property of ULSE Inc.

© 2025 ULSE Inc. All rights reserved.

No Text on This Page

ULNORM.COM : Click to view the full PDF of UL 746S 2025

CONTENTS

INTRODUCTION

1	Scope	5
2	Units of Measurements	5
3	Referenced Publications	5
4	Glossary	5
5	Related Standards	6

EVALUATION OF MECHANICALLY RECYCLED PLASTICS

6	Mechanically Recycled Plastic	7
6.1	General	7
6.2	Mechanically recycled plastics with consistent identification	8
6.3	Mechanically recycled plastics without consistent identification	10
6.4	Quality Assurance (QA) program	11

MARKING

7	General	12
---	---------------	----

ULNORM.COM : Click to view the full PDF of UL 746S 2025

No Text on This Page

ULNORM.COM : Click to view the full PDF of UL 746S 2025

INTRODUCTION

1 Scope

1.1 This standard establishes program requirements for the evaluation of sustainable polymeric materials for use in electrical equipment. The test program is intended to ensure acceptable material performance with respect to flammability, electrical, mechanical, and other related safety properties.

1.2 This Standard will cover the requirements for using Mechanically Recycled Plastic in various proportions with the virgin material.

2 Units of Measurements

2.1 Values stated without parentheses are the requirement. Values in parentheses are explanatory or approximate information.

3 Referenced Publications

3.1 Any undated reference to a code or standard appearing in the requirements of this Standard shall be interpreted as referring to the latest edition of that code or standard.

3.2 The following publications are referenced in this Standard:

IEC 60695-10-2, *Fire hazard testing – Part 10-2: Abnormal heat – Ball pressure test method*

UL 94, *Standard Tests for Flammability of Plastic Materials for Parts in Devices and Appliances*

UL 746A, *Polymeric Materials – Short Term Property Evaluations*

UL 746B, *Polymeric Materials – Long Term Property Evaluations*

UL 746C, *Polymeric Materials – Use in Electrical Equipment Evaluations*

UL 746D, *Polymeric Materials – Fabricated Parts*

4 Glossary

4.1 For the purposes of this Standard the following definitions apply.

4.1A BATCH – Quantity or material regarded as a single unit and having a unique reference.

4.2 MECHANICALLY RECYCLED PLASTIC BASE COLOR – The color of the mechanically recycled resin arising from pigments and dyes that are in the as received resin and prior to any further addition of pigments or dyes. For example, the base color of a mechanically recycled plastics resin can be gray or black with the actual color depending on the distribution of pigments and dyes given the multiple plastics being recycled in the recycled plastics stream.

4.3 MECHANICALLY RECYCLED PLASTICS – Those plastics composed of post-consumer material or post-industrial material only, or both, that may or may not have been subjected to additional processing steps of the types used to make products such as mechanically recycled-regrind, or reprocessed plastic.

4.4 POLYMERIC MATERIAL – A compound formed by chemical reaction that results in large molecules whose molecular weight is a multiple of that of the original substance (monomer). Includes thermoplastic, thermoset, and elastomeric materials.

4.4A POST CONSUMER RECYCLE (PCR) MATERIAL – Material generated by households or by commercial, industrial and institutional facilities in their role as end-users of the product which can no longer be used for its intended purpose. This includes returns of material from the distribution chain.

4.4B POST INDUSTRIAL RECYCLE (PIR) MATERIAL – Material diverted from the waste stream during a manufacturing process. Excluded from this definition of PIR Material is the reutilization of materials such as rework, reground or scrap generated in a process and capable of being reclaimed within the same process that generated it.

4.4C PRODUCTION BATCH – A quantity or consignment of recycled plastic material, produced at one time, consisting of incoming recycled stream (recovered material) from a single batch or multiple batches, optionally combined with virgin resin and/or other additives.

4.4D RECOVERED MATERIAL BATCH – A specific quantity or consignment of recovered material that is expected to be homogeneous within specified limits and has a unique reference number, used as a material input, in lieu of the virgin material, for a recycling or manufacturing process.

4.5 Deleted

4.6 Deleted

4.7 RECYCLED STREAM (RECOVERED MATERIAL) – Material that would have otherwise been disposed of as waste or used for energy recovery, but has instead been collected and recovered (reclaimed) as a material input, instead of new primary material, for a recycling or manufacturing process.

4.8 RELATED VIRGIN RESIN – Existing virgin material from which the recycle material composition is derived.

5 Related Standards

5.1 The following is a summary of the requirements provided in UL 94, UL 746A, UL 746B, UL 746C, and UL 746D:

- a) UL 94 cover flammability of polymeric materials used for parts in devices and appliances.
- b) UL 746A contains short-term test procedures to be used for the evaluation of materials used for parts intended for specific applications in electrical end products.
- c) UL 746B contains long-term test procedures to be used for the evaluation of materials used for parts intended for specific applications in end products.
- d) UL 746C contain test procedures for the evaluation of polymeric materials in specific applications in end products. The test procedures include reference to the data obtained from the standard property tests in UL 746A, as well as other practical means of evaluation.
- e) UL 746D covers requirements for materials that have been modified to match the requirements of a specific application, including the use of additives and colorants and the blending of two or more materials.

5.2 Requirements for the evaluation of recycled plastic materials are described in this Standard.


EVALUATION OF MECHANICALLY RECYCLED PLASTICS

6 Mechanically Recycled Plastic

6.1 General


6.1.1 Mechanically recycled plastics shall be evaluated to determine whether the variations between production batches have significantly affected critical material properties. [Figure 6.1](#) illustrates the test program for recycled thermoplastic materials and the following paragraphs describe the test requirements and acceptability criteria. [Figure 6.2](#) provides additional information regarding production batches prepared by combining Recycled Stream (Recovered Material) with or without virgin resin, fillers or other additives.

Figure 6.1
Mechanically Recycled Thermoplastic Material Test Program

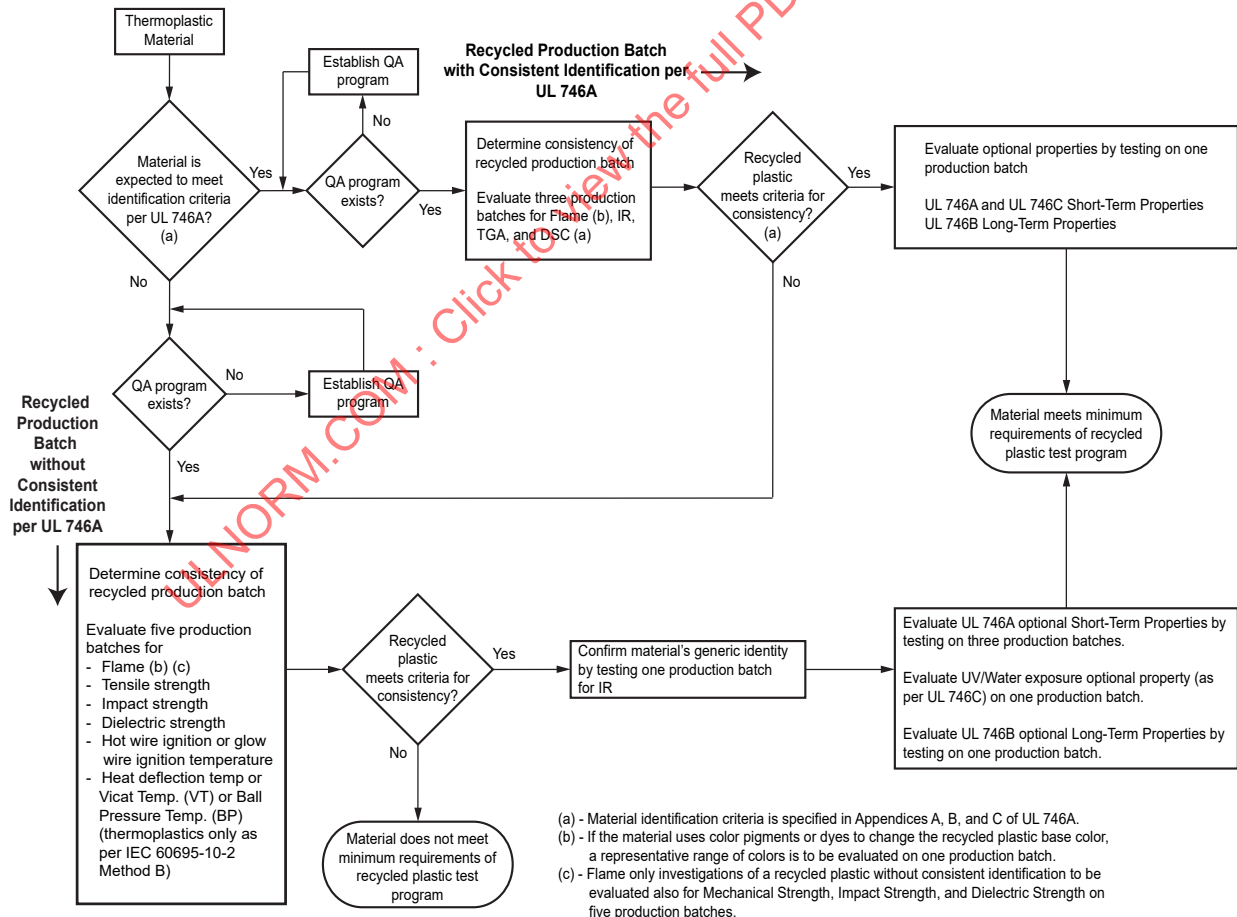

su1293g

Figure 6.2
Production Batch Examples for Materials Without Consistent ID's

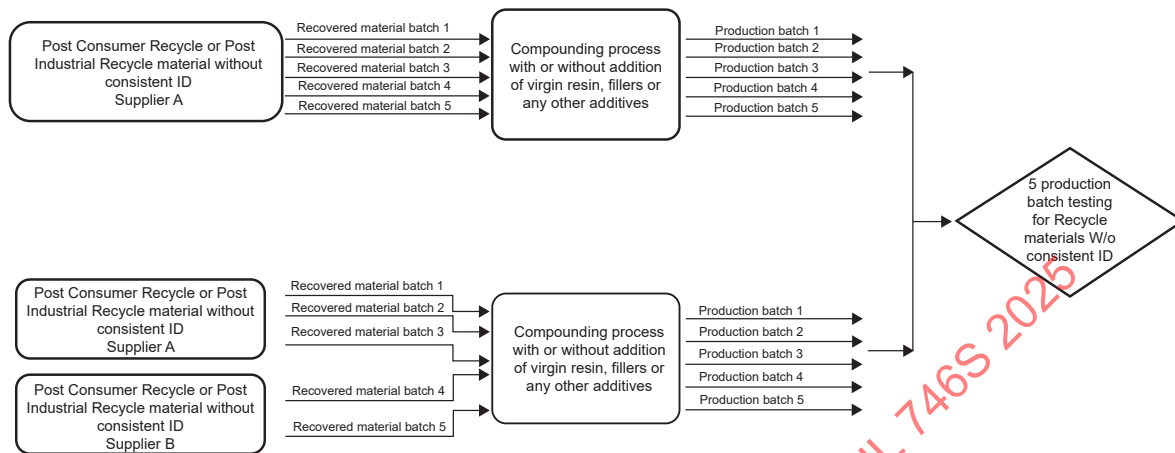

su5234

6.2 Mechanically recycled plastics with consistent identification

6.2.1 Mechanically recycled plastics, as described in 4.3 meeting the identification comparison criteria in UL 746A are to be categorized as recycled plastics with consistent identification.

6.2.2 Mechanically recycled plastics, as described in 4.3 that are expected to meet the identification criteria in UL 746A between different batches are to have a complete series of UL 94 flammability and UL 746A identification tests, conducted on specimens for three production batches.

6.2.3 Results of tests for the three production batches are expected to meet the following requirements:

- a) The identification tests per UL 746A are to be comparable between batches.
- b) The same flammability rating is to be maintained for all tested production batches in the mechanically recycled plastic base color or if base color is not part of the evaluation, a commonly produced color that is part of the evaluation can be considered for complete series of UL 94 flammability and UL 746A identification tests, on three production batches.
- c) For additional colors, only one production batch is required for flammability testing in compliance with requirements from test specimens for the:
 - 1) Horizontal Burning Test;
 - 2) 50W (20 mm) Vertical Burning Test; V-0, V-1, or V-2; and
 - 3) 500 W (125 mm) Vertical Burning Test; 5VA or 5VB

of UL 94, as applicable, and the rating of this one batch shall be the same as the rating of the recycled plastic color that was evaluated for three production batches.

6.2.4 For evaluation of additional short and long-term properties, testing of specimens from one production batch is to be conducted.

a) Short-term properties include ignition (HWI, HAI, GWFI, GWIT), tracking (CTI, IPT, HVTR, D495), outdoor exposure (UV, Water), mechanical (Tensile, Impact), electrical (Dielectric), as referenced in UL 746A; and

b) Long-term properties include Tensile Strength, Electrical Strength, or Impact Strength evaluated through heat aging per UL 746B.

6.2.5 A generic relative thermal index (RTI), per UL 746B, shall be assigned according to the generic identity of the recycled plastic ascertained through Infrared Analysis per UL 746A.

6.2.6 [Table 6.1](#) indicates the criteria for assigning Relative Thermal Index (RTI) to an existing plastic material with elevated RTIs for cases pertaining to addition, deletion and change-in-level of recycled resin with consistent identification. If the identification test results of the recycled plastics do not compare favorably to a related virgin resin with an elevated RTI, the recycled plastic shall obtain an elevated RTI through a 4-point Long Term Thermal Aging program described in UL 746B. In that case the recycle material evaluated shall be a new designation.

6.2.7 [Table 6.1](#) indicates the criteria for assigning UV/water resistance rating to an existing plastic material having UV/water resistance rating for cases pertaining to addition, deletion and change-in-level of recycled resin with consistent identification. UV/Water resistance properties described in UL 746C are to be evaluated on one batch for each representative color. If the identification test results of the recycled plastic do not compare favorably to a related virgin resin with UV/Water resistance rating, the recycled material evaluated shall be a new designation.

Table 6.1
Long-Term Property Evaluation Scenarios for Mechanically Recycled Plastics

Component	Addition to virgin material (virgin resin is replaced with recycle material of same generic)		Deletion (recycle material is replaced with virgin material of same generic)		Change in level of the recycle material (substitute with virgin material of same generic)	
	Absolute (%)	Program code ^a	Absolute (%)	Program code ^a	Normalized (%)	Program code ^a
Post-consumer and/or Post- industrial Recycle with consistent identification	Any	1A, 1E, 1F	Any	1A	Decrease (Any)	1A
					Increase (≤30)	1B
					Increase (>30)	1E, 1F
Post-consumer and/or Post- industrial Recycle without consistent identification	Any	1D, 1E, 1F	Any	1C	Decrease (Any)	1C
					Increase (≤30)	1D
					Increase (>30)	1E, 1F

^a Program Codes

Table 6.1 Continued on Next Page