

AEROSPACE RECOMMENDED PRACTICE

SAE ARP1135

REV.
A

Issued 1969-05
Revised 2004-01

Supersedes ARP1135

Standardization of Drive End of Hydraulic Or Geared Torque Wrenches for Use to An Upper Limit of 500,000 inch pounds

NOTICE

Changes in this Revision are format/editorial only.

1. SCOPE:

This SAE Aerospace Recommended Practice (ARP) covers the dimensions of an inside splined driver-wrench adapter, envelope of the housing-wrench reaction, the mechanical method of adapting the driver-wrench adapter to the wrench adapter driven end, and the housing-wrench reaction to the holder-counter torque.

2. PURPOSE:

The purpose of this recommended practice is to provide recommendations for the design of a series of components which, when used as prescribed, will provide a wrench capable of producing up to 500,000 in-lb of torque.

3. GENERAL REQUIREMENTS:

3.1 Reference Standards:

The following specifications may be applicable and provide useful information.

3.1.1 Military Standards:

MIL-S-8512 Support Equipment, Aeronautical

MIL-D-1000 Drawings and Data List

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2004 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER:

Tel: 877-606-7323 (inside USA and Canada)
Tel: 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: custsvc@sae.org
<http://www.sae.org>

SAE WEB ADDRESS:

**SAE values your input. To provide feedback
on this Technical Report, please visit**

<http://www.sae.org/technical/standards/ARP1135A>

SAE ARP1135 Revision A

3.1.2 SAE Standards:

SAE J498B Involute Splines, Serrations and Inspection (Conforms with ASA B5.15-1960)
Supersedes ARP911 (Inactive)

3.2 Material and Workmanship:

3.2.1 Material: Material specified for use in fabrications should be of the highest quality suitable for the purpose.

3.2.2 Workmanship: All details shall be in accordance with the best manufacturing practices.

4. DETAIL REQUIREMENTS:

4.1 The design configuration should consist of three sub-assemblies (see Figure 1):

- a. Driver-wrench adapter (Figure 2 and Figure 3)
- b. Wrench adapter to torqued part (Figure 3 for spline details)
- c. Holder-counter torque wrench

All components should be designed with a safety factor of 3-to-1, based on yield strength at rated wrench power.

4.2 All splines shall be calculated to the SAE J498B Basic Dimension criteria for flat root side fit.

4.3 All adapters shall be designed separately to adapt to various units as required.

4.4 Dimensional requirements not specified herein are to be such that all details subject to normal replacement, be interchangeable with any and all components.

PREPARED BY SAE COMMITTEE EG-1,
AEROSPACE PROPULSION SYSTEMS SUPPORT EQUIPMENT

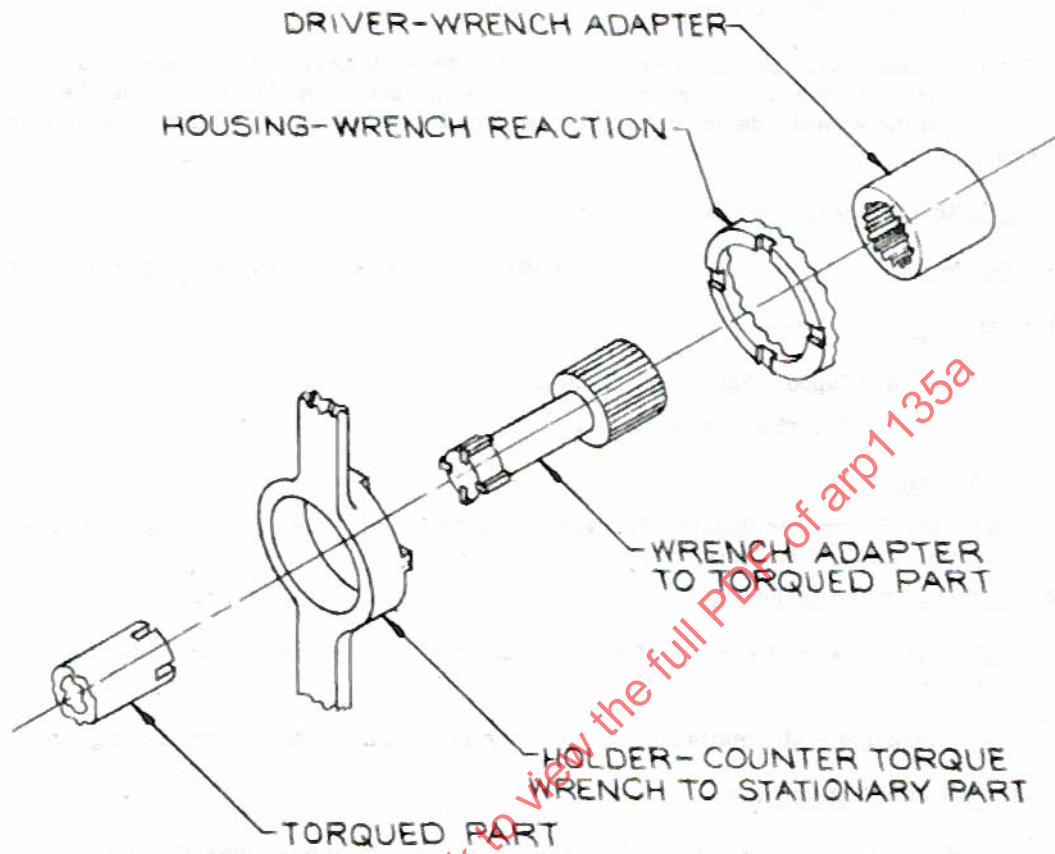


FIGURE 1

SAE ARP1135 Revision A

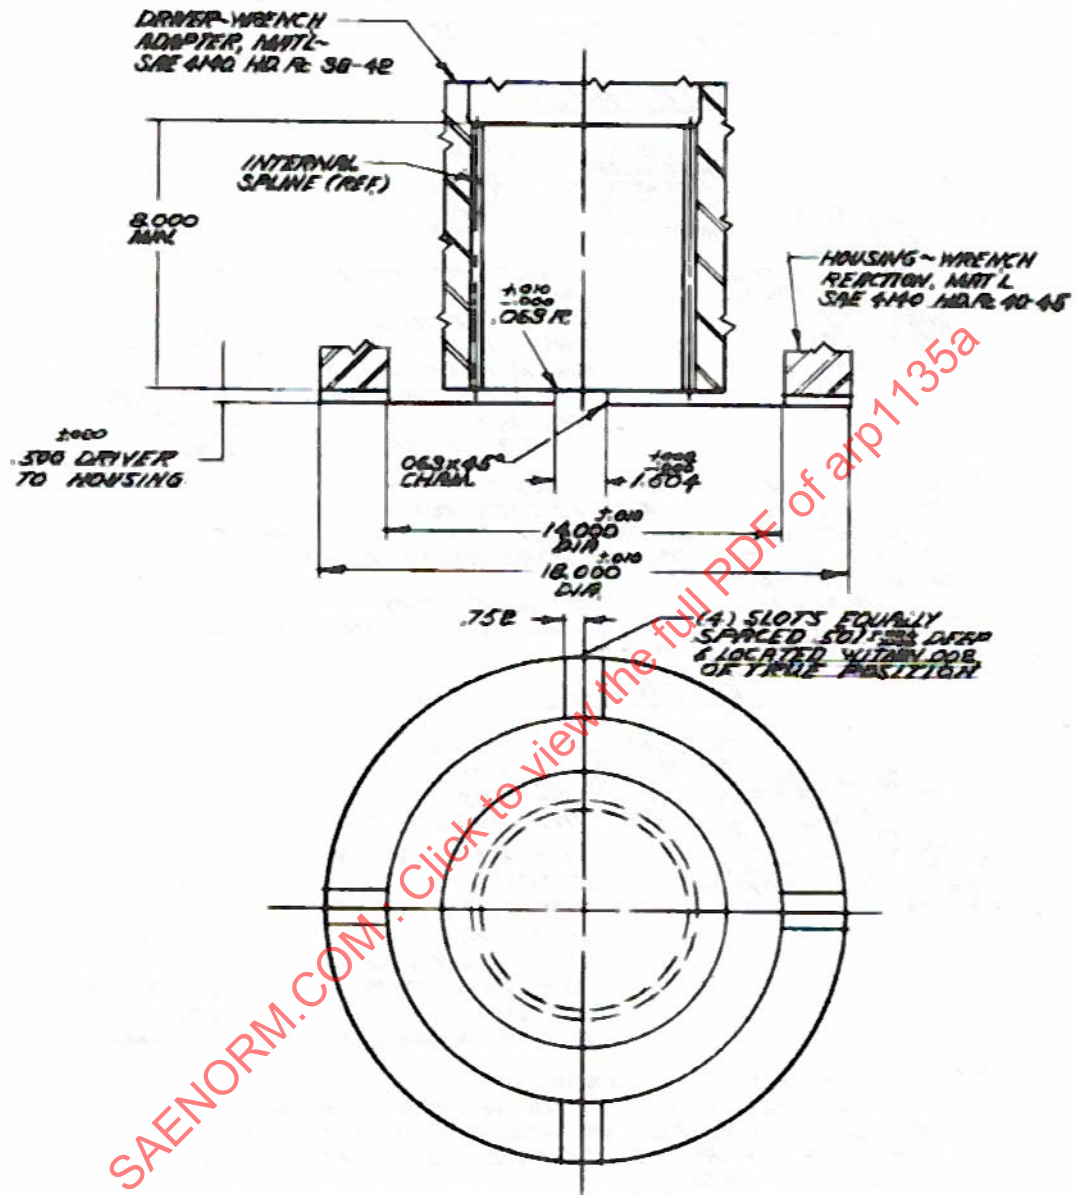


FIGURE 2