
**Assembly tools for screws and nuts —
Machine-operated screwdriver bits —
Part 1:
Screwdriver bits for slotted head screws**

Outils de manœuvre pour vis et écrous — Embouts tournevis à machine —

Partie 1: Embouts tournevis pour vis à tête fendue



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 2351-1:2007

© ISO 2007

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 2351-1 was prepared by Technical Committee ISO/TC 29, *Small tools*, Subcommittee SC 10, *Assembly tools for screws and nuts, pliers and nippers*.

This second edition cancels and replaces the first edition (ISO 2351-1:2002), which has been technically revised.

ISO 2351 consists of the following parts, under the general title *Assembly tools for screws and nuts — Machine-operated screwdriver bits*:

- *Part 1: Screwdriver bits for slotted head screws*
- *Part 2: Screwdriver bits for cross-recessed head screws*
- *Part 3: Screwdriver bits for hexagon socket screws*

Assembly tools for screws and nuts — Machine-operated screwdriver bits —

Part 1: Screwdriver bits for slotted head screws

1 Scope

This part of ISO 2351 prescribes the technical specifications for machine-operated screwdriver bits for slotted head screws. It applies to bits with male hexagon drive or with cylindrical flat end drive as defined in ISO 1173, and to tips for screwdrivers Type C as defined in ISO 2380-1.

It also gives recommended combinations between tips and bits.

NOTE Machine-operated screwdriver bits are listed under number 3 2 04 01 0 in ISO 1703.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.


ISO 1173, *Assembly tools for screws and nuts — Drive ends for hand- and machine-operated screwdriver bits and connecting parts — Dimensions, torque testing*

ISO 2380-1, *Assembly tools for screws and nuts — Screwdrivers for slotted-head screws — Part 1: Tips for hand- and machine-operated screwdrivers*

3 Dimensions

Figure 1 and Table 1 show the recommended combinations of screwdriver bits for slotted head screws.

The shape of the liaison between the tip and the driver end is at the discretion of the manufacturer.

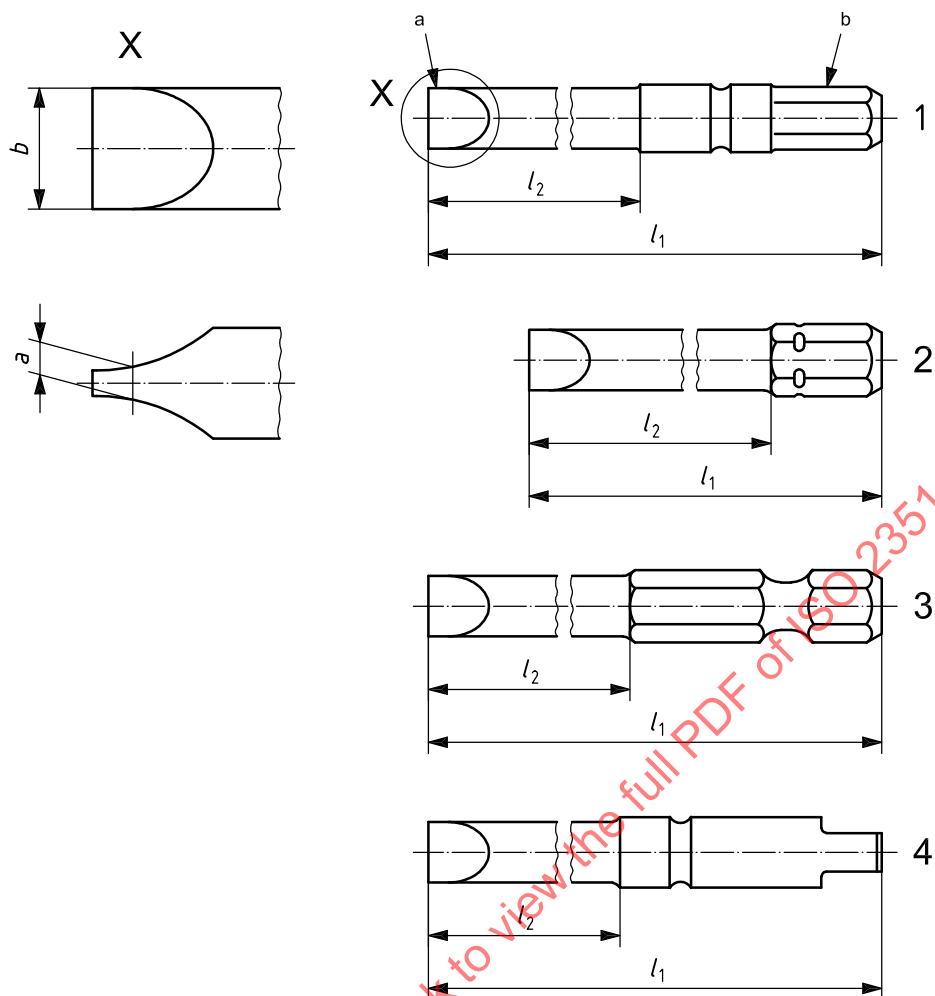

Key

- 1 Form A
- 2 Form C
- 3 Form E
- 4 Form G

^a Part in contact with the screw (in accordance with ISO 2380-1, Type C).

^b Driver end (in accordance with ISO 1173).

Figure 1 — Screwdriver bits (see Table 1)

Table 1 — Recommended combinations between tip and driver end

Dimensions in millimetres

Nominal dimensions of tips (in accordance with ISO 2380-1, Type C)			Male hexagon or cylindrical flat end of form (in accordance with ISO 1173)									
			A 3	A 5,5	C 4	C 6,3	C 8	C 12,5	E 6,3	E 8	E 11,2	G 7
Thickness	Width	l_1 max.	51		29	40	42	51	51	86		54
a	b	l_2 min.	25		11	13	14	14	24	52	47	25
0,4	2		X		X							
	2,5		X		X	X						
0,5	3		X	X	X	X			X			X
	4		X	X	X	X			X			X
0,6	3		X	X	X	X			X			X
	3,5		X	X	X	X			X			X
	4,5		X	X	X	X			X			X
0,8	4		X	X	X	X			X		X	X
	5,5		X	X	X	X			X	X	X	X
1	4,5		X	X	X	X	X		X	X	X	X
	5,5		X	X	X	X	X		X	X	X	X
	6			X		X	X		X	X	X	X
1,2	6,5			X		X	X		X	X	X	X
	8			X		X	X		X	X	X	X
1,6	8			X		X	X	X	X	X	X	X
	10			X		X	X	X	X	X	X	
2	12						X	X		X	X	
2,5	14						X	X		X	X	

4 Technical requirements

The technical specifications of bits are the same as those for screwdrivers in accordance with ISO 2380-1, Type C.

5 Torque test

Torque testing shall be carried out in accordance with ISO 2380-1, Type C.

6 Designation

A screwdriver bit in accordance with this part of ISO 2351 shall be designated by:

- a) "Bit";
- b) the reference to this part of ISO 2351 (i.e. ISO 2351-1);
- c) the form and the dimensions of the driver end (in accordance with ISO 1173);
- d) the dimensions of the tip (in accordance with ISO 2380-1, Type C).

EXAMPLE A screwdriver bit for slotted head screws with a drive end E 11,2 (in accordance with ISO 1173) and the tip dimensions 1,6 mm × 8 mm (in accordance with ISO 2380-1, Type C) is designated as follows

Bit ISO 2351-1 E 11,2 – 1,6 × 8

7 Marking

Screwdriver bits in accordance with this part of ISO 2351 shall be marked permanently and legibly with:

- a) the name of the manufacturer or supplier;
- b) dimensions of the tip, $a \times b$.

For male hexagons A 3 and C 4, the marking shall be given only on the smallest commonly used packaging unit.