
International Standard



7434

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Slotted set screws with cone point

Vis sans tête, fendues, à bout pointeau

First edition — 1983-09-01

STANDARDSISO.COM : Click to view the full PDF of ISO 7434:1983

UDC 621.882.219.4.092.5

Ref. No. ISO 7434-1983 (E)

Descriptors : fasteners, screws, slotted headless screws, dimensions, specifications, designation.

Price based on 3 pages

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been authorized has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 7434 was developed by Technical Committee ISO/TC 2, *Fasteners*, and was circulated to the member bodies in December 1981.

It has been approved by the member bodies of the following countries:

Austria	Hungary	Poland
Belgium	India	Romania
Brazil	Ireland	South Africa, Rep. of
China	Japan	Spain
Czechoslovakia	Korea, Dem. P. Rep. of	Sweden
Denmark	Korea, Rep. of	Switzerland
Egypt, Arab Rep. of	Mexico	United Kingdom
Finland	Netherlands	USSR
France	New Zealand	
Germany, F.R.	Norway	

No member body expressed disapproval of the document.

Slotted set screws with cone point

1 Scope and field of application

This International Standard specifies the characteristics of slotted set screws with cone point and thread sizes from M 1,2 to M 12 inclusive and product grade A.

If other specifications are required, it is recommended that they should be selected from existing International Standards, for example ISO 261, ISO 888, ISO 898, ISO 965, ISO 3506, ISO 4759/1.

2 References

ISO 225, *Fasteners — Bolts, screws, studs and nuts — Symbols and designations of dimensions.*

ISO 261, *ISO general purpose metric screw threads — General plan.*

ISO 888, *Bolts, screws and studs — Nominal lengths, and thread lengths for general purpose bolts.*

ISO 898, *Mechanical properties of fasteners.*

ISO 965, *ISO general purpose metric screw threads — Tolerances.*

ISO 3269, *Fasteners — Acceptance inspection.*¹⁾

ISO 3506, *Corrosion-resistant stainless steel fasteners — Specifications.*


ISO 4042, *Threaded components — Electroplated coatings components.*¹⁾

ISO 4753, *Fasteners — Ends of parts with external metric ISO thread.*

ISO 4759/1, *Tolerances for fasteners — Part 1: Bolts, screws and nuts with thread diameters $\geq 1,6$ and ≤ 150 mm and product grades A, B and C.*

¹⁾ At present at the stage of draft.

3 Dimensions

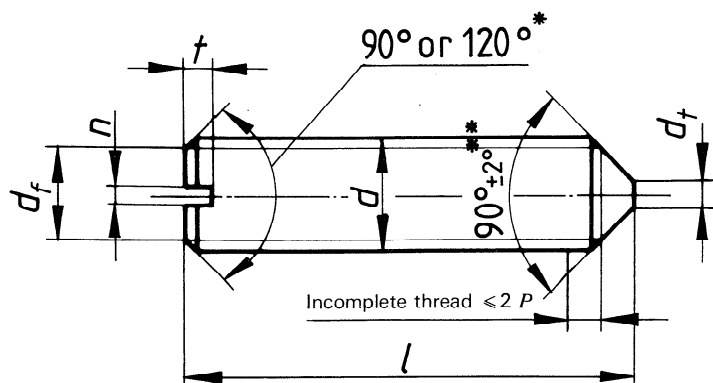

* The 120° angle is mandatory for short length screws above the dotted stepped line.

** The 90° angle applies only to the portion of the point below the root diameter of the thread with nominal lengths l below the dotted stepped line.

For short length screws above the dotted stepped line a 120° angle is mandatory.

Dimensions in millimetres

Thread size d			M 1,2	M 1,6	M 2	M 2,5	M 3	(M 3,5) ¹⁾	M 4	M 5	M 6	M 8	M 10	M 12
$P^{2)}$			0,25	0,35	0,4	0,45	0,5	0,6	0,7	0,8	1	1,25	1,5	1,75
$d_f \approx$			Minor thread diameter											
$d_t^{3)}$	min.		—	—	—	—	—	—	—	—	—	—	—	—
	max.		0,12	0,16	0,2	0,25	0,3	0,35	0,4	0,5	1,5	2	2,5	3
n	nom.		0,2	0,25	0,25	0,4	0,4	0,5	0,6	0,8	1	1,2	1,6	2
	min.		0,26	0,31	0,31	0,46	0,46	0,56	0,66	0,86	1,06	1,26	1,66	2,06
	max.		0,4	0,45	0,45	0,6	0,6	0,7	0,8	1	1,2	1,51	1,91	2,31
t	min.		0,4	0,56	0,64	0,72	0,8	0,96	1,12	1,28	1,6	2	2,4	2,8
	max.		0,52	0,74	0,84	0,95	1,05	1,21	1,42	1,63	2	2,5	3	3,6
$l^{1), 4)}$														
nom.	min.	max.												
2	1,8	2,2												
2,5	2,3	2,7												
3	2,8	3,2												
4	3,7	4,3												
5	4,7	5,3												
6	5,7	6,3												
8	7,7	8,3												
10	9,7	10,3												
12	11,6	12,4												
(14)	13,6	14,4												
16	15,6	16,4												
20	19,6	20,4												
25	24,6	25,4												
30	29,6	30,4												
35	34,5	35,5												
40	39,5	40,5												
45	44,5	45,5												
50	49,5	50,5												
55	54,4	55,6												
60	59,4	60,6												

1) Sizes in brackets should be avoided if possible.

2) P = pitch of the thread.

3) $\leq M5$ no flat part on the cone required; the point may be slightly rounded.

4) Min. and max. values according to ISO 4759/1, but rounded to one decimal place.

4 Specifications and reference International Standards

Material		Steel	Stainless steel	Non-ferrous metal
Thread	Tolerance	6g		
	International Standards	ISO 261, ISO 965		
Mechanical properties	Property class	14H, 22H	A1 - 50	1)
	International Standards	ISO 898/5	ISO 3506	
Tolerances	Product grade	A		
	International Standard	ISO 4759/1		
Finish		Plain Requirements for electroplating are covered in ISO 4042. If different electroplating requirements are desired or if requirements are needed for other finishes, they should be negotiated between supplier and customer.		
Acceptability		The acceptance procedure is covered in ISO 3269		

1) Will be covered in a future International Standard.

5 Designation

Example for the designation of a slotted set screw with cone point, thread size $d = M5$, nominal length $l = 12$ mm and property class 14H:

Set screw ISO 7434 - M5 × 12 - 14H

This page intentionally left blank

STANDARDSISO.COM : Click to view the full PDF of ISO 7434:1983